



SCHEDULE OF MINIMUM FIXTURE CONNECTIONS						
FIXTURE	DESIGNATION	WASTE	VENT	H.W 110°	C.W	
WATER CLOSET ☐	W.C.	4"	2"	—	1 1/4"	
LAVATORY	LAV.	1 1/2"	1 1/2"	1/2"	1/2"	
URINAL ☐	UR.	2"	1 1/2"	—	1"	
SHOWER	SH.	2"	1 1/2"	3/4"	3/4"	
WATER COOLER	E.W.C. *	1 1/2"	1 1/2"	—	1/2"	
NOTE: EACH HOT & COLD WATER SUPPLY TO EACH FIXTURE SHALL BE INDIVIDUALLY VALVED. * = TO BE ELECTRIC WATER COOLER ☐ = PROVIDE WITH SHOCK ARRESTORS						

PLUMBING LEGEND	
SYMBOL	DESCRIPTION
—	ABOVE GROUND SOIL AND/OR WASTE PIPING
---	UNDERGROUND SOIL AND/OR WASTE PIPING
----	VENT PIPING
----	COLD WATER PIPING
----	HOT WATER PIPING (110")
----	HOT WATER RECIRCULATING PIPING (H.W.R.)
—G—	GAS PIPING (G.)
—S—	SHUT-OFF VALVE
—G—	GLOBE VALVE
—C—	CHECK VALVE
—C.O.—	CLEANOUT (C.O.)
—D.P.C.O.—	DECK PLATE CLEANOUT (D.P.C.O.)
—U—	UNION
—N—	NEW CONNECTION TO EXISTING FACILITY
—P—	PLUMBING STACK No. 1
—D—	DETAIL No. 1, DRAWING P-1


ABBREVIATIONS	
SYMBOL	DESCRIPTION
AFF	ABOVE FINISHED FLOOR
AFG	ABOVE FINISHED GRADE
BFP	BACK FLOW PREVENTER
CLG	CEILING
CO	CLEAN OUT
CW	COLD WATER
DN	DOWN
DPCO	DECK PLATE CLEAN OUT
FD	FLOOR DRAIN
HB	HOSE BIBB (18" A.F.F.)
HW	HOT WATER
HWR	HOT WATER RECIRCULATING
SA	SHOCK ARRESTOR
SK	SINK
U/G	UNDERGROUND
VTR	VENT THROUGH ROOF
WCO	WALL CLEANOUT
WH	WALL HYDRANT

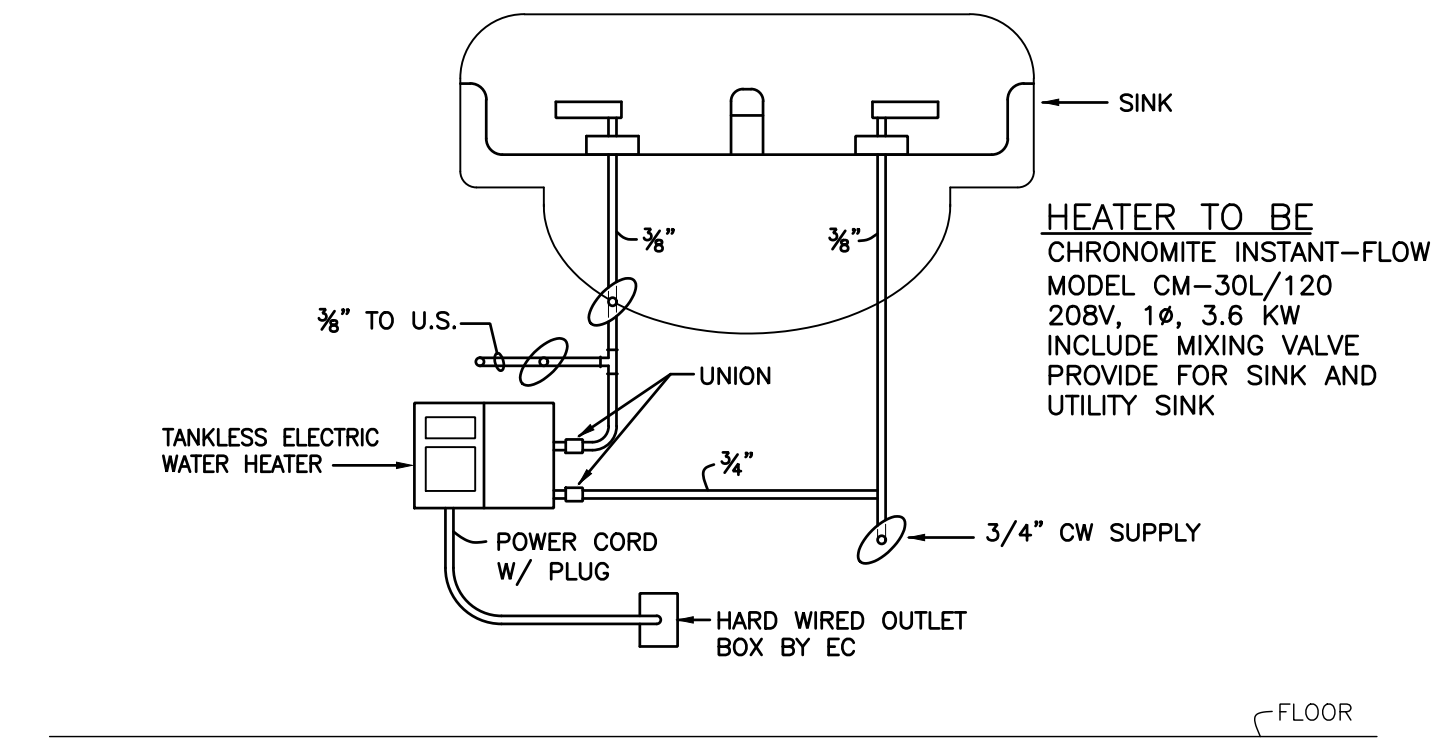


5 POINT OF USE WATER HEATER DETAIL
P-100 NOT TO SCALE

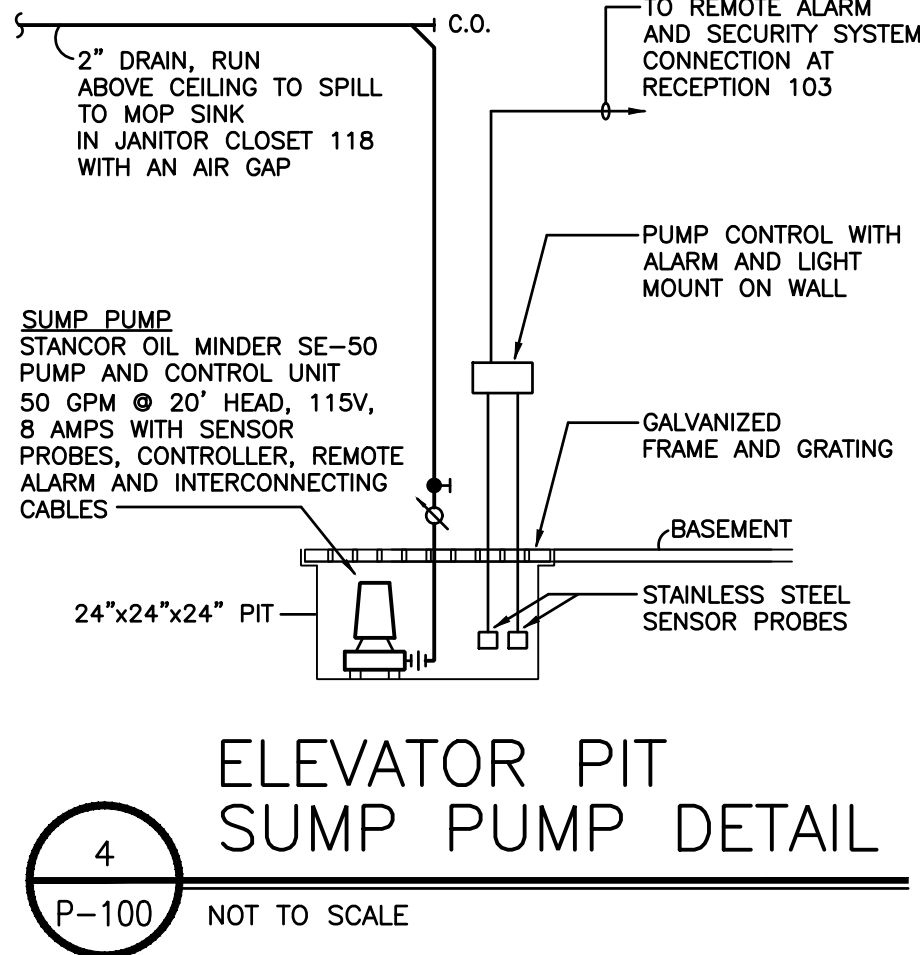


4 ELEVATOR PIT SUMP PUMP DETAIL
P-100 NOT TO SCALE

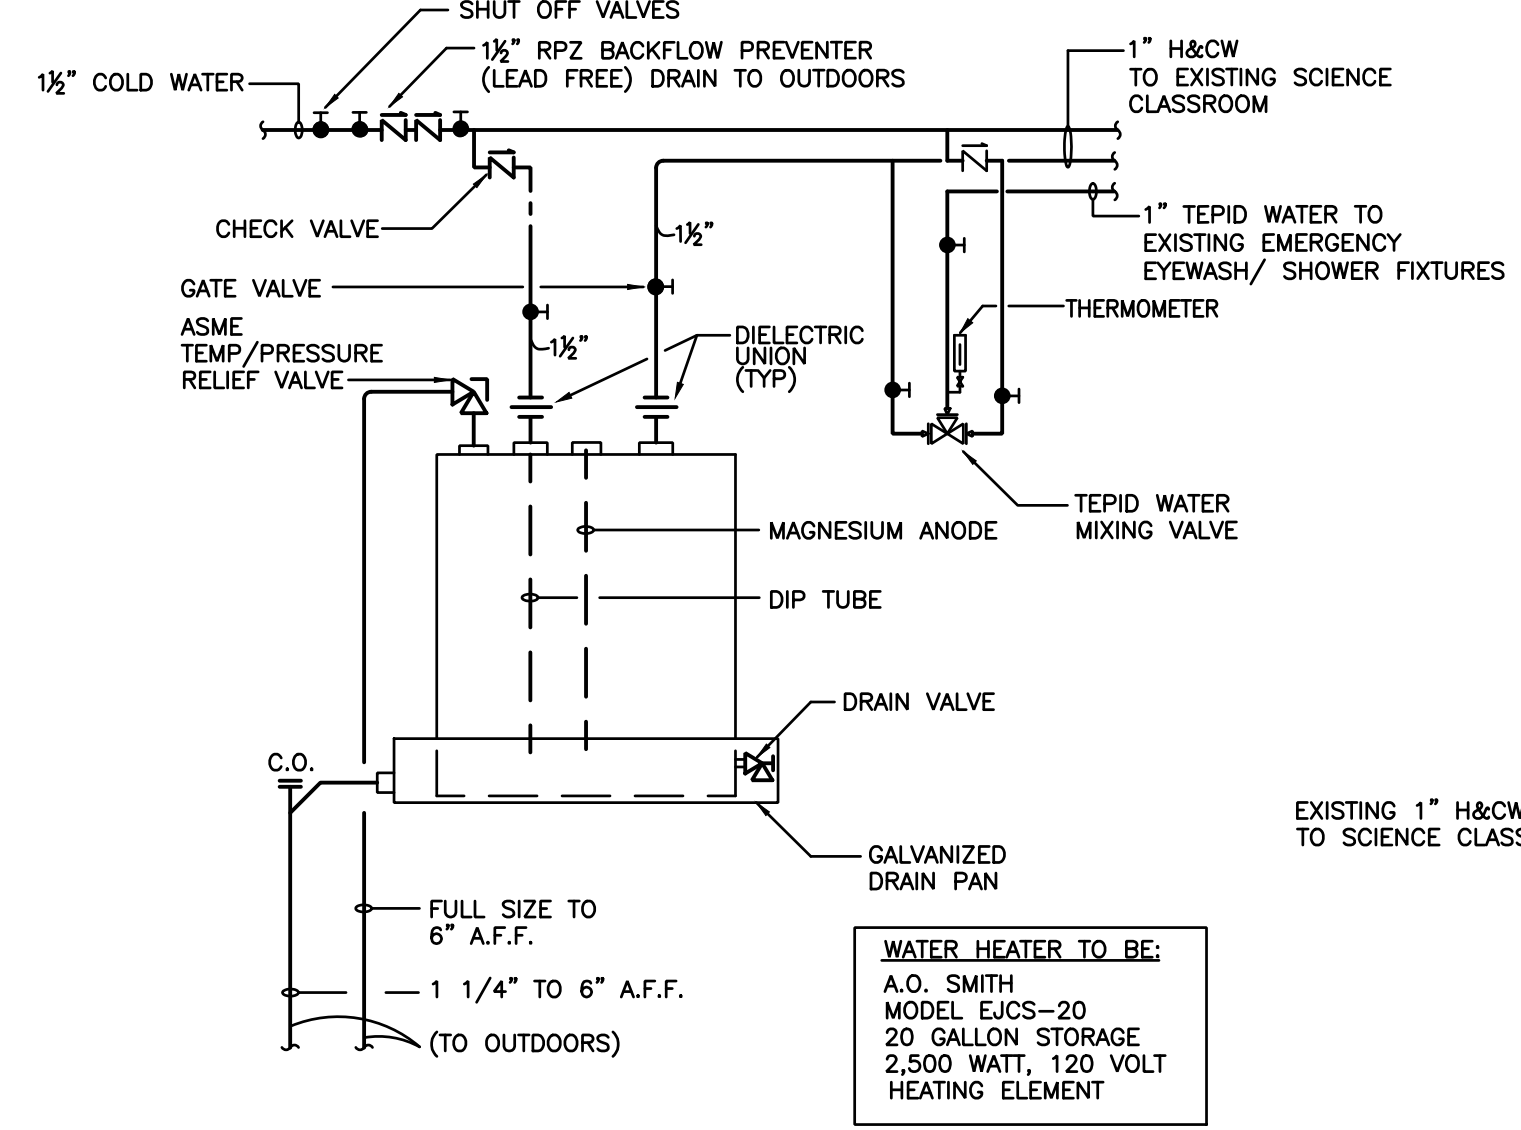


3 TEMPORARY WATER HEATER DETAIL FOR EXISTING SCIENCE CLASSROOMS
P-100 NOT TO SCALE

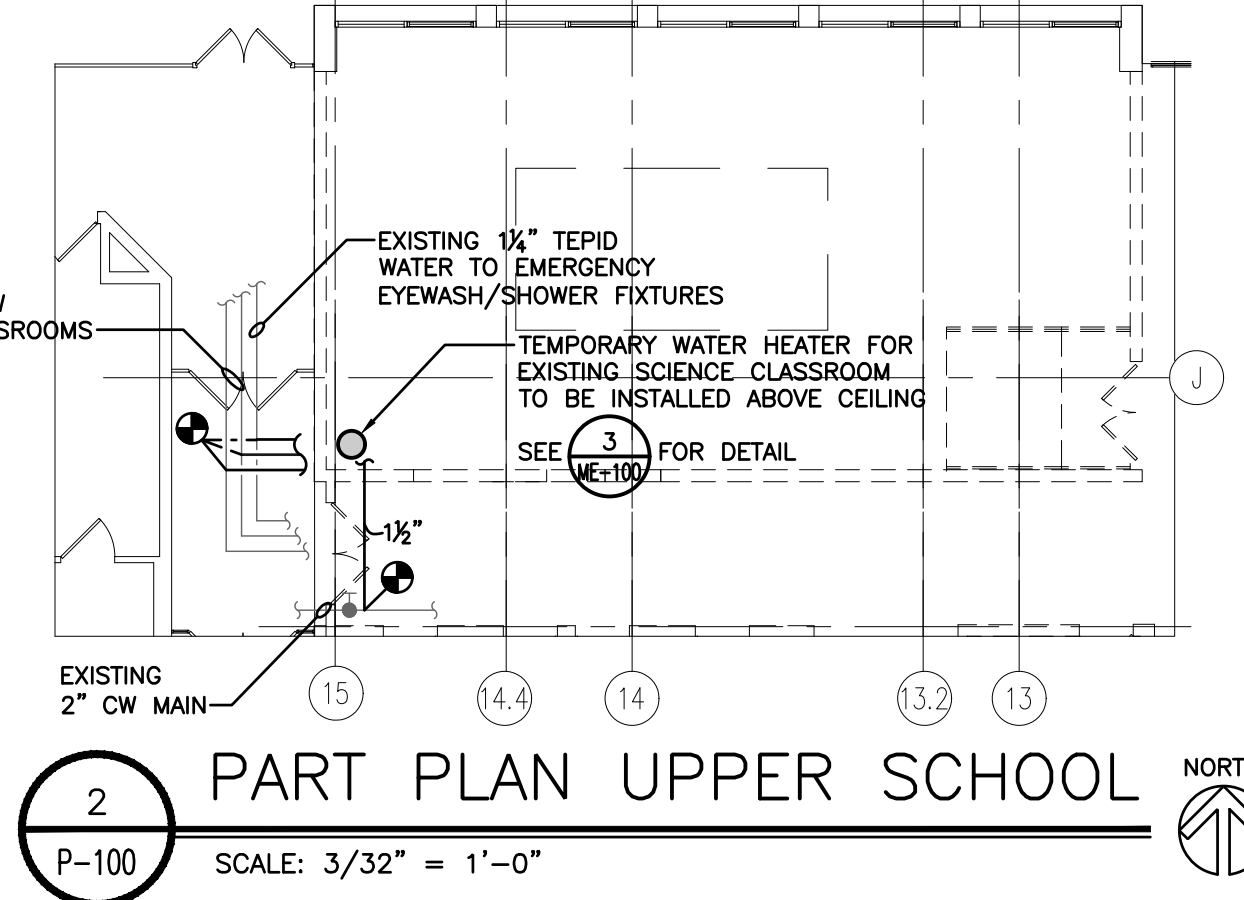

2 PART PLAN UPPER SCHOOL
P-100 SCALE: 3/32" = 1'-0"

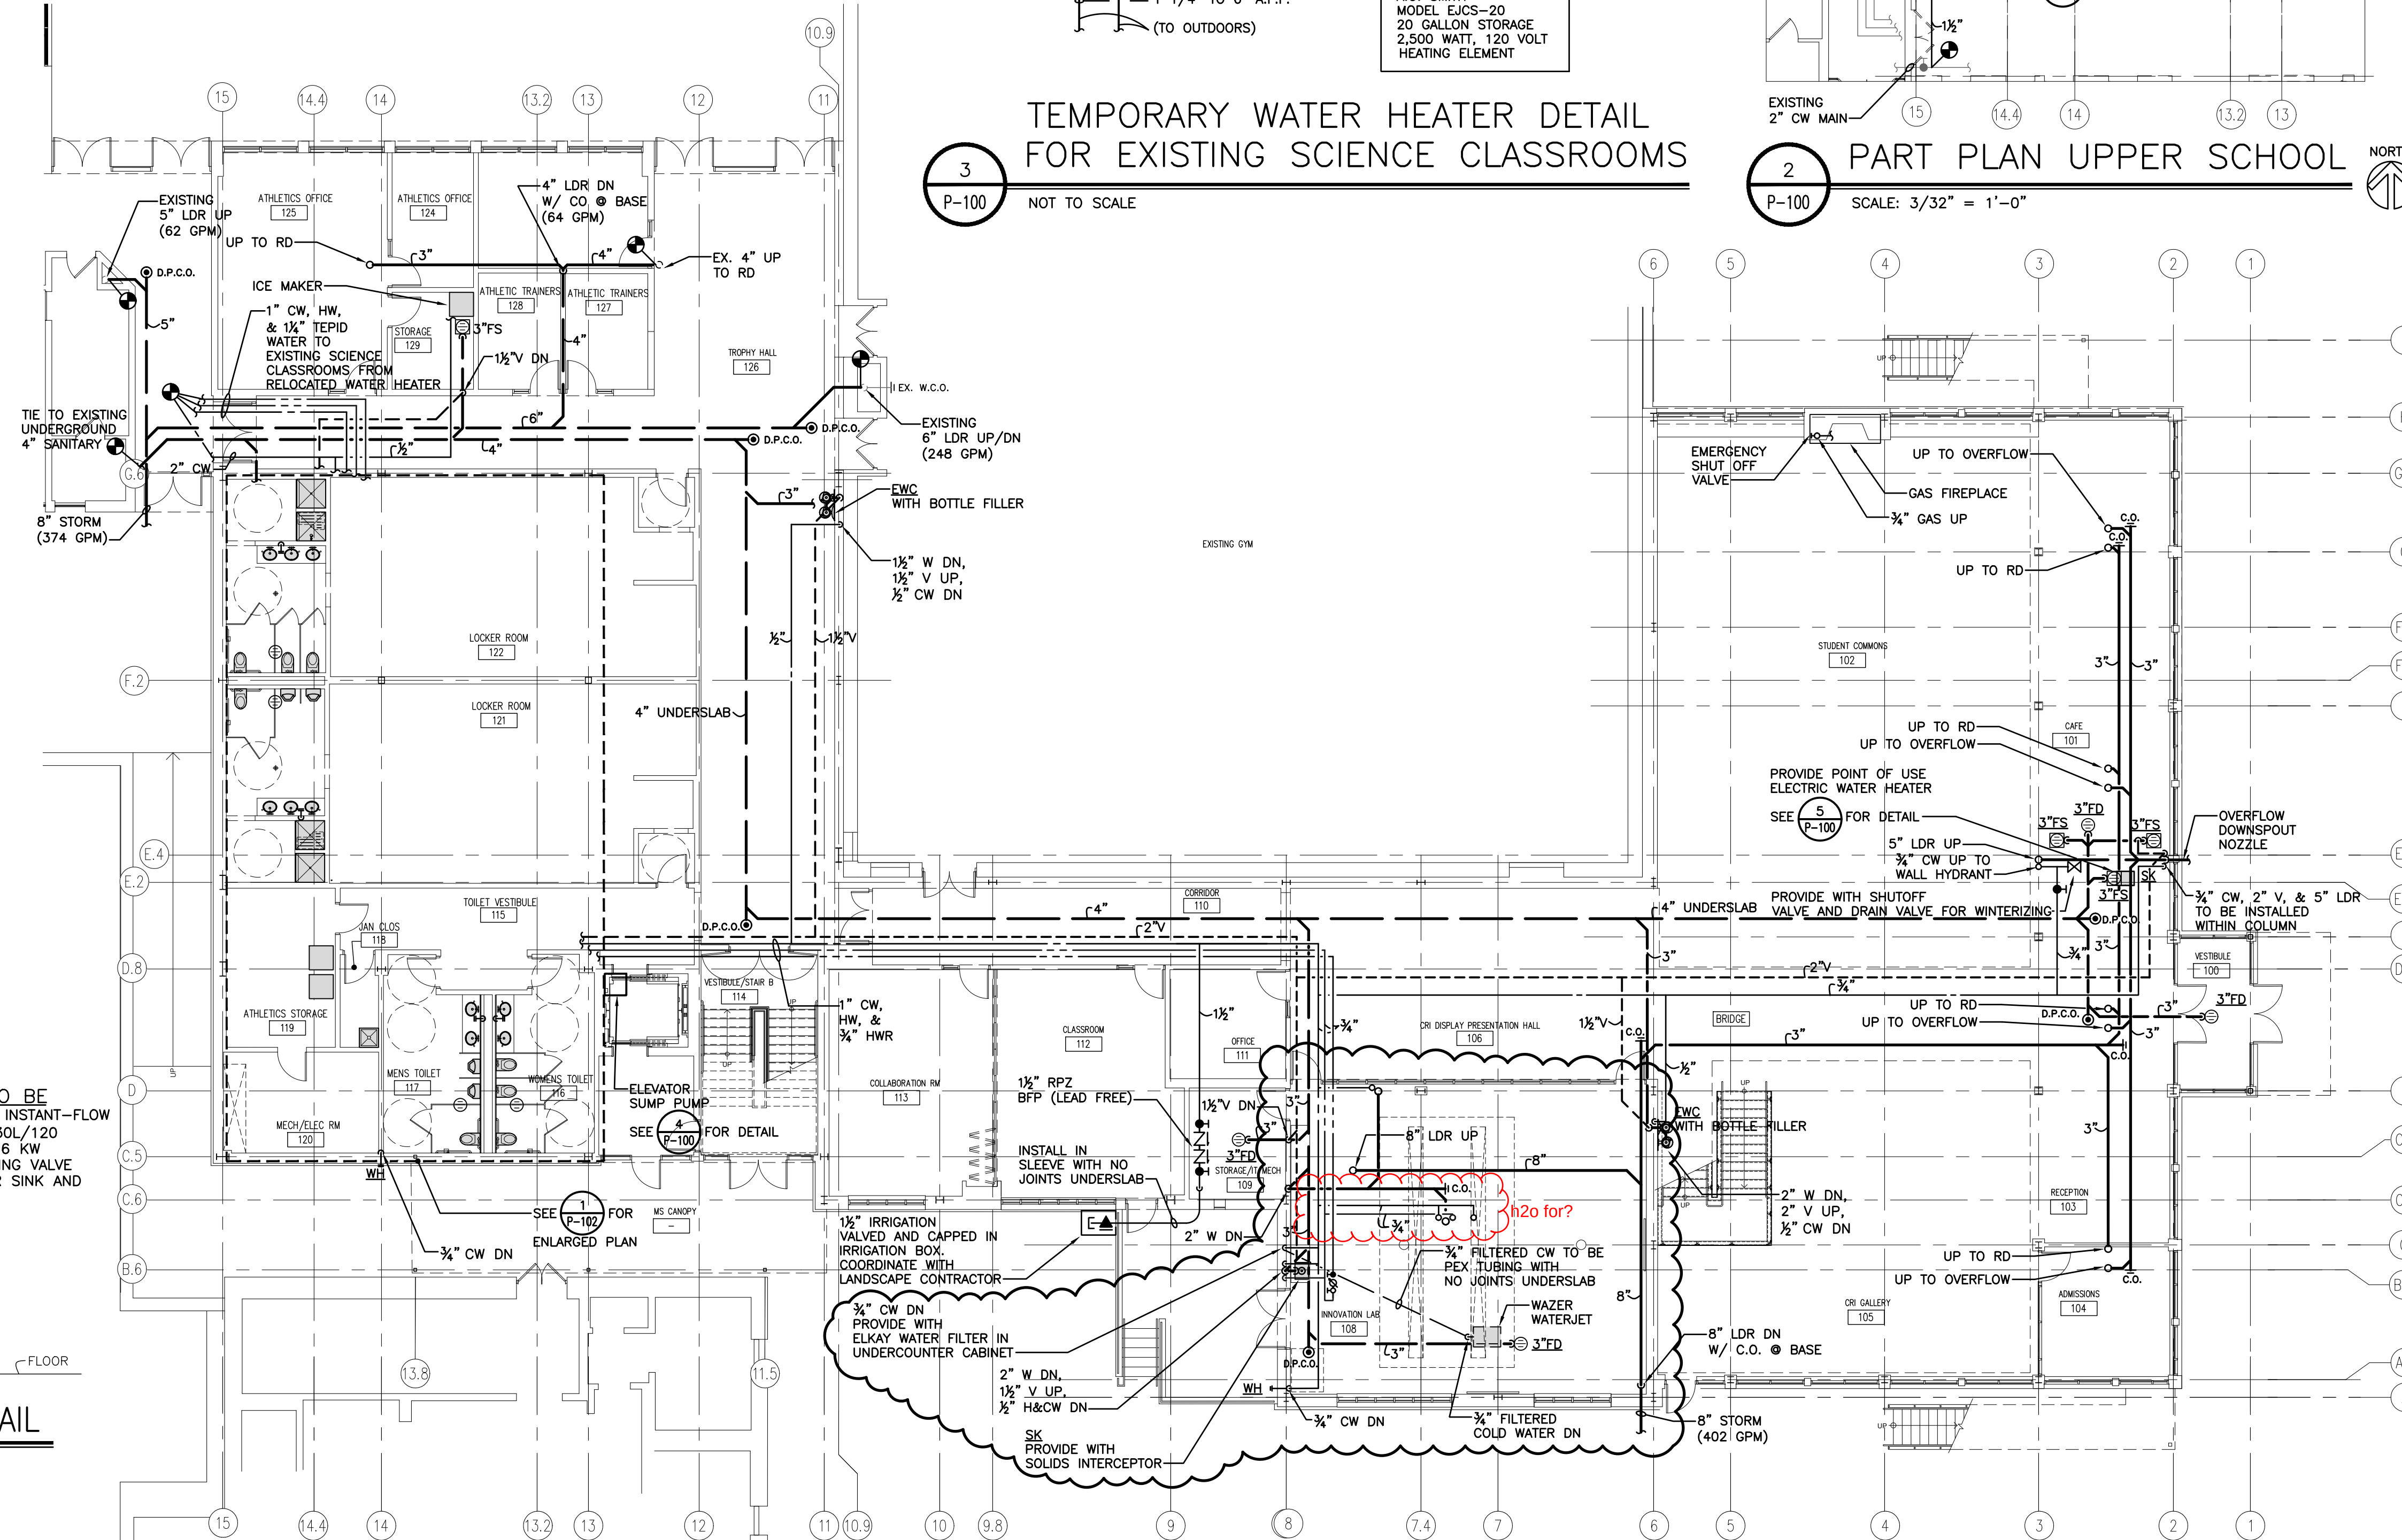

1 FIRST FLOOR PLAN-PLUMBING
P-100 SCALE: 3/32" = 1'-0"

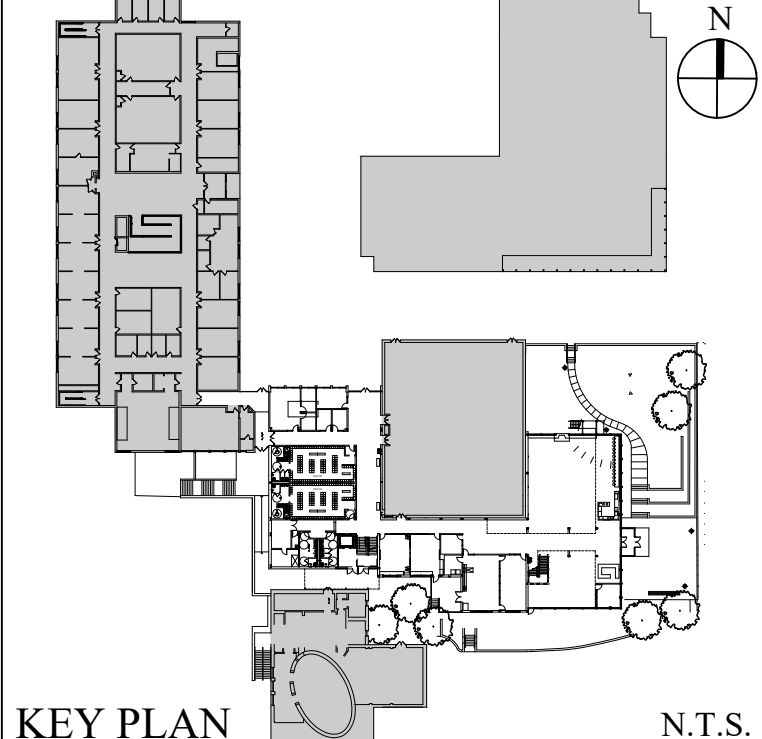

KEY PLAN N.T.S.

No.	Date	Revision
5.		
4.	06/30/2025	100% CD COMPLETE
3.	03/12/2025	50% CD COMPLETE - ADDENDUM 2
2.	02/18/2025	50% CD COMPLETE - ADDENDUM 1
1.	02/07/2025	50% CD COMPLETE - ISSUED FOR CD ESTIMATE
ARCHITECT		
PETER GISOLFI ASSOCIATES, LLP		
566 WARBURTON AVENUE		
HASTINGS-ON-HUDSON, NY 10706		
T: (914) 478-3677		
STRUCTURAL ENGINEER		
DRIPILA CONSULTING ENGINEERS		
143 MAIN STREET		
NYACK, NY 10960		
T: (845) 727-7793		
MEP ENGINEERS		
WATSKY ASSOCIATES		
68 PURCHASE STREET		
RYE, NY 10580		
T: (914) 967-8509		
ROOFING CONSULTANT		
WATSKY ASSOCIATES		
20 MADISON AVENUE		
VALHALLA, NY 10595		
T: (914) 948-3450		
CODE CONSULTANT		
BILLY GREGORY GILW, AIA		
241 MAIN STREET SOUTH		
WOODBURY, CT 06798		
T: (203) 215-1074		
SPECIFICATIONS		
CONSTRUCTION SPECIFICATIONS INC.		
PO BOX 488		
MORGANVILLE, NJ 07751		
T: (203) 962-5771		
CIVIL ENGINEER (BY OWNER)		
LANGAN CT, INC.		
355 LONG WHARF DRIVE		
NEW HAVEN, CT 06515		
(203) 962-5771		
CIVIL ENGINEER (BY OWNER)		
REDNESS AND MEAD		
22 FIRST STREET		
STAMFORD, CT 06905		
(203) 327-0500		



Project Title
KING SCHOOL
UPPER SCHOOL
CRI/COMMONS
ADDITION PROJECT
1450 Newfield Avenue
Stamford, CT 06905
Drawing Title
PLUMBING
FIRST FLOOR PLAN LEGEND, NOTES
& DETAIL

Scale	Job No.	Date	Drawing No.
	2301.00	02/2025	P-100
Drawn	Checked	Approved	

Peter Gisolfi Associates
Architects + Landscape Architects, LLP
566 Warburton Avenue
Hastings on Hudson, NY 10706
(914) 478-3677
PETER GISOLFI ASSOCIATES LLP

PROGRESS PRINT
NOT FOR CONSTRUCTION
08/20/25

T:\North\2023\2302 KING SCHOOL UPPER SCHOOL CRTH-COMMONS ADDITION PROJECT\2302 P-104 SANITARY & WATER RISERS.dwg, 8/20/2025 5:05:36 PM, ARCH full bleed D (36.00 x 24.00 inches), F.G.

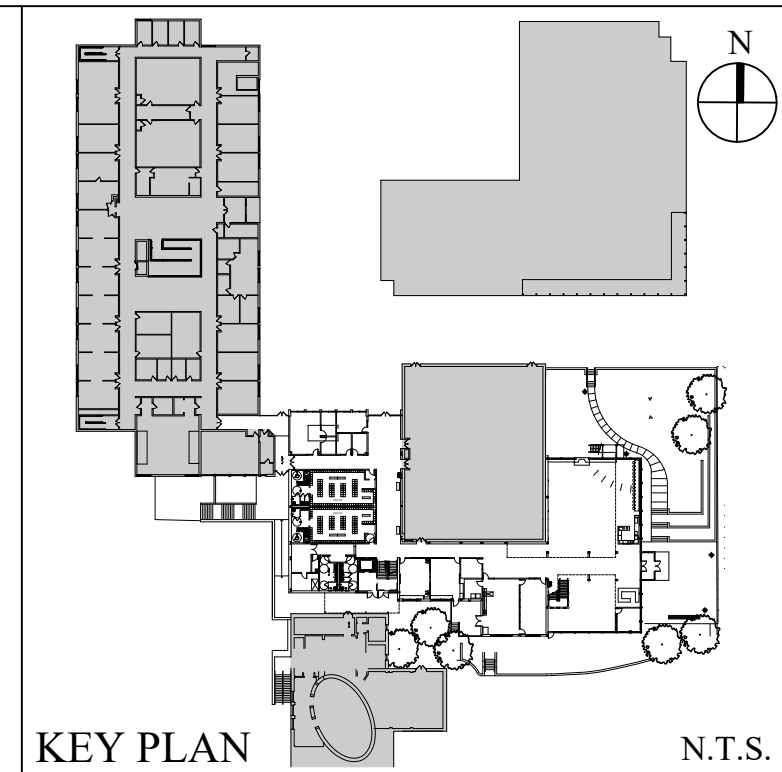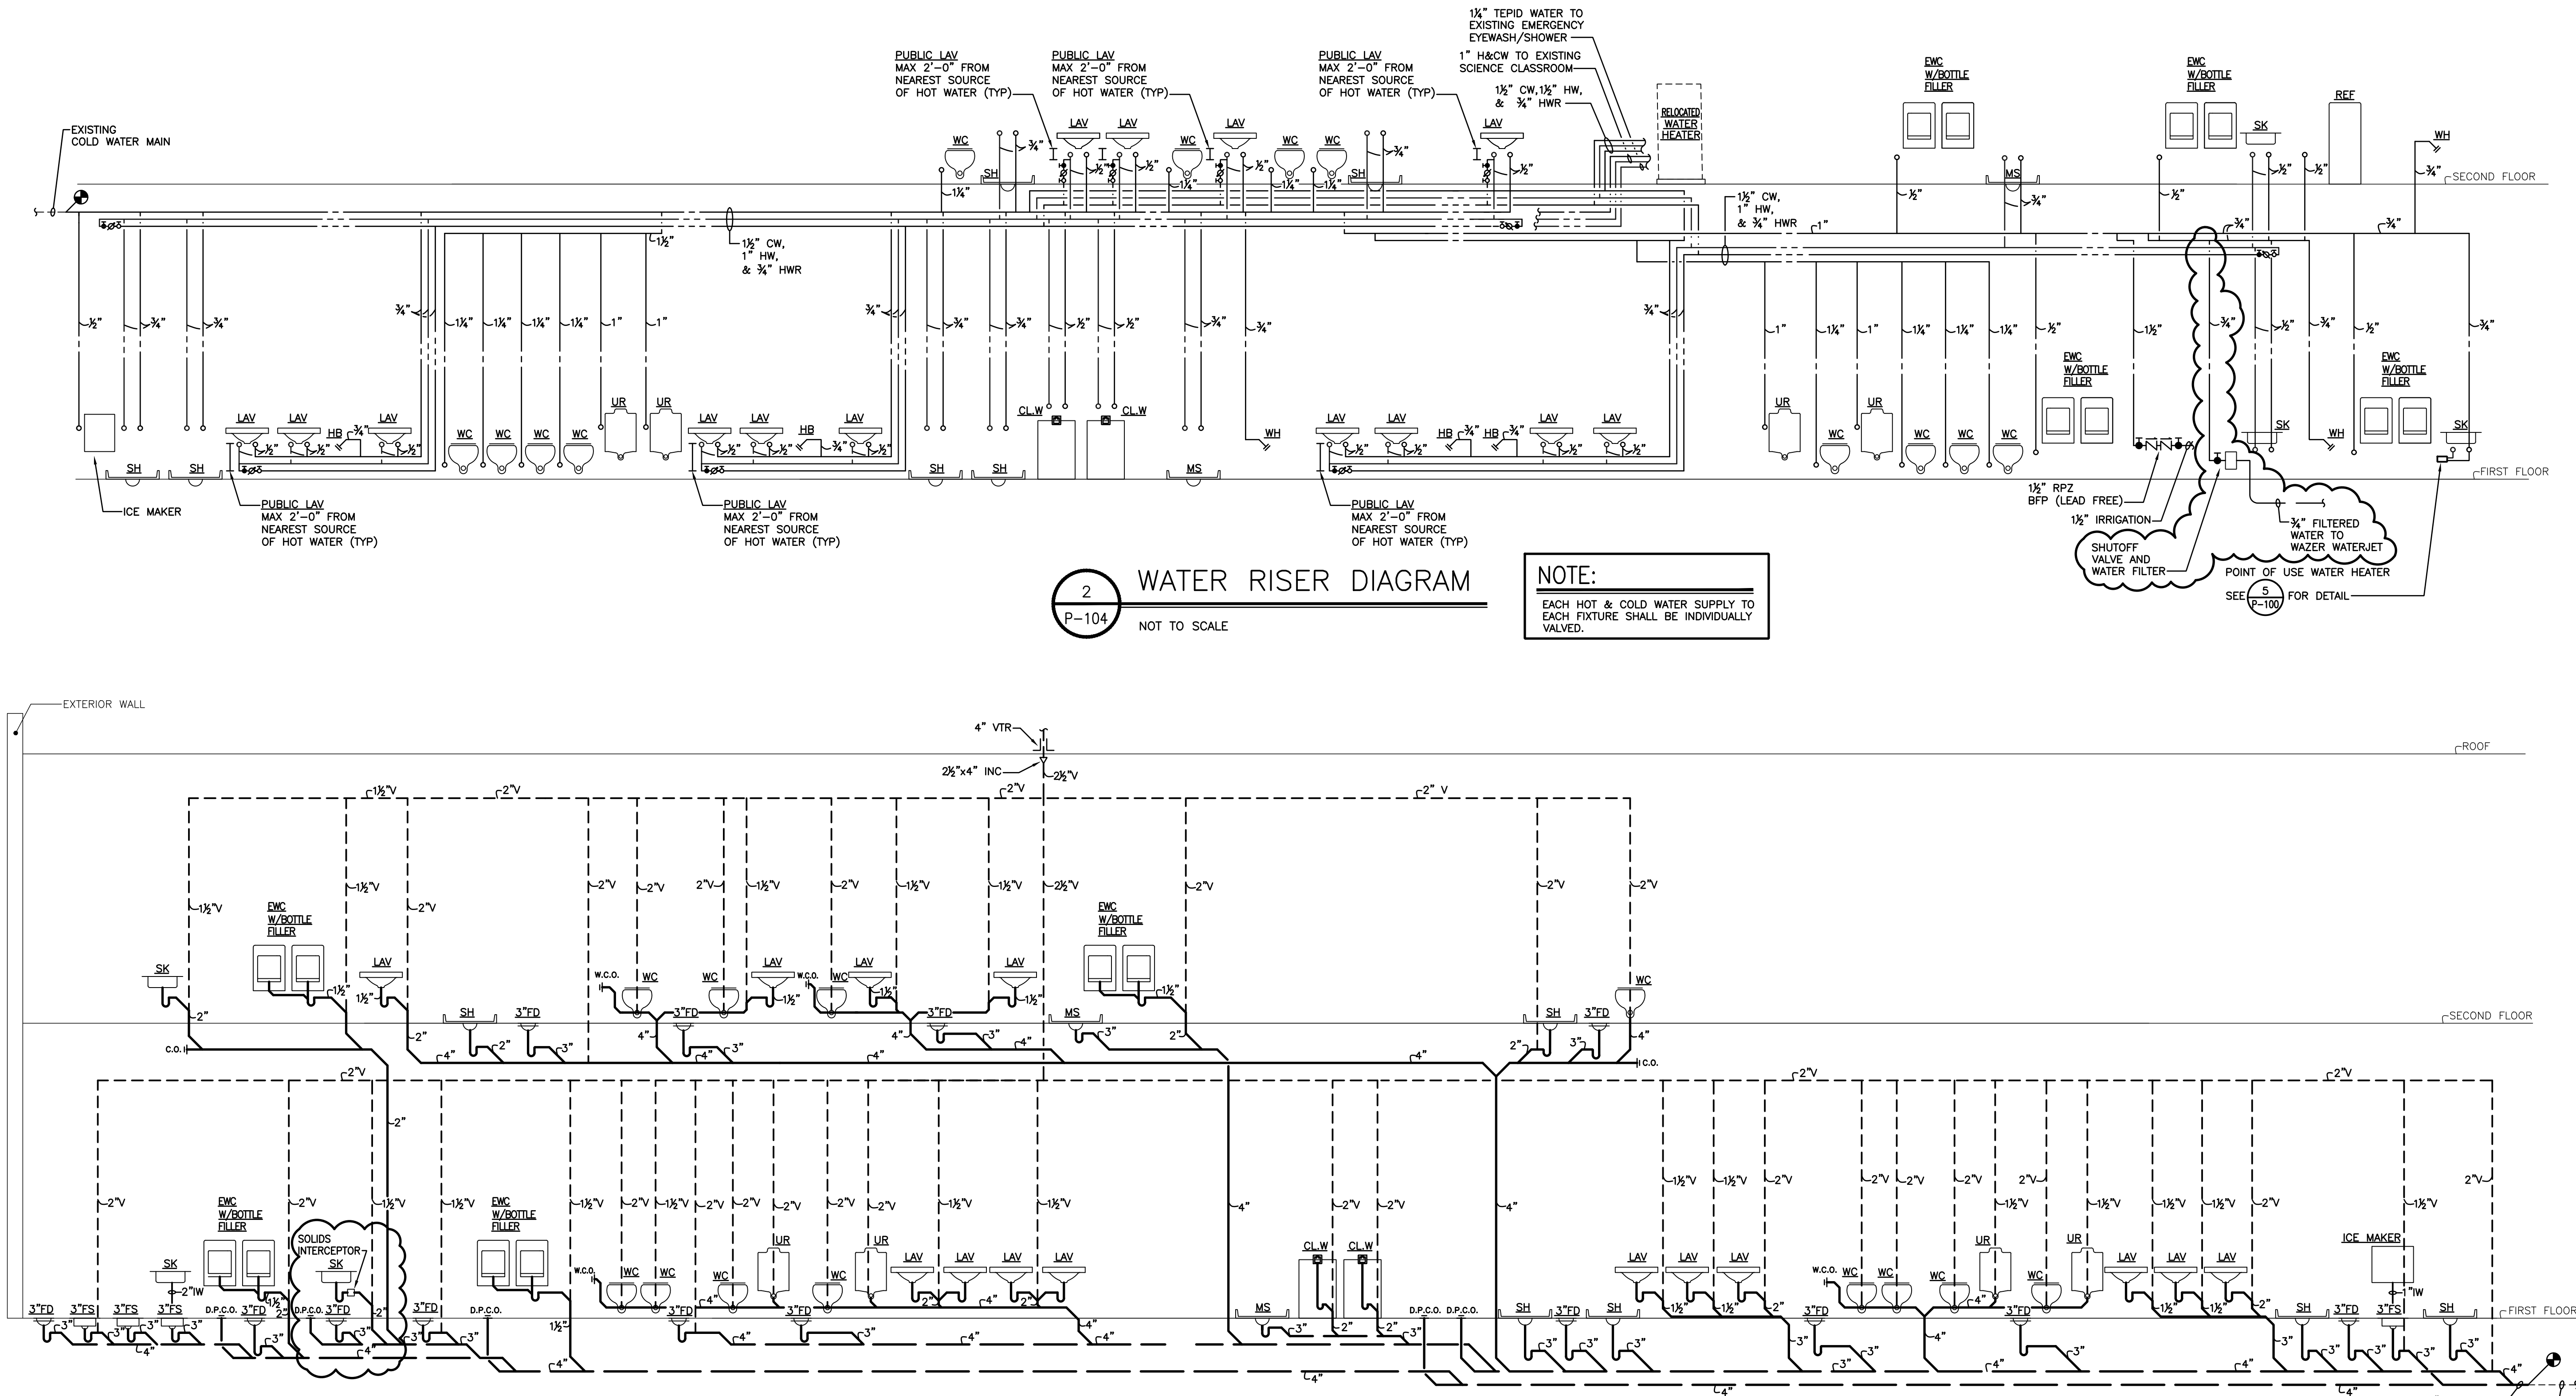

KEY PLAN N.T.S.

No.	Date	Revision
5.		
4.	06/30/2025	100% CD COMPLETE
3.	03/12/2025	50% CD COMPLETE - ADDENDUM 2
2.	02/18/2025	50% CD COMPLETE - ADDENDUM 1
1.	02/07/2025	50% CD COMPLETE - ISSUED FOR CD ESTIMATE

ARCHITECT	STRUCTURAL ENGINEER
PETER GISOLFI ASSOCIATES, LLP 566 WARBURTON AVENUE HASTINGS-ON-HUDSON, NY 10706 T: (914) 478-3677	DRELLA CONSULTING ENGINEERS 143 MAIN STREET NYACK, NY 10960 T: (845) 727-7793
MEP ENGINEERS	ROOFING CONSULTANT
WATSKY ASSOCIATES, PLLC 68 PURCHASE STREET BYE, NY 10580 T: (914) 4967-8509	WATSKY ASSOCIATES 20 MADISON AVENUE VALHALLA, NY 10595 T: (914) 948-3450
CODE CONSULTANT	SPECIFICATIONS
WILFORD GREGORY CREW, AIA 241 MAIN STREET SOUTH WOODBURY, CT 06798 T: (203) 217-1074	CONSTRUCTION SPECIFICATIONS PO BOX 488 MORGANVILLE, NJ 07751 T: (732) 970-0700
GEOTECHNICAL ENGINEER (BY OWNER)	CIVIL ENGINEER (BY OWNER)
L'ANGLAN CT, INC. 355 LONG WHARF DRIVE NEW HAVEN, CT 06515 T: (203) 962-5771	REDNESS AND MEAD 22 FIRST STREET STAMFORD, CT 06905 (203) 327-0500

Stamp

Project Title
**KING SCHOOL
UPPER SCHOOL
CRI/COMMONS
ADDITION PROJECT**
1450 Newfield Avenue
Stamford, CT 06905



Drawing Title
**PLUMBING
WATER & SANITARY RISER DIAGRAMS**

Scale	Job No.	Date	Drawing No.
	2301.00	02/2025	P-104
Drawn	Checked	Approved	

Peter Gisolfi Associates
Architects • Landscape Architects, LLP
566 Warburton Avenue
Hastings on Hudson, NY 10706
(914) 478-3677



PETER GISOLFI ASSOCIATES LLP

PROGRESS PRINT
NOT FOR CONSTRUCTION
08/20/25

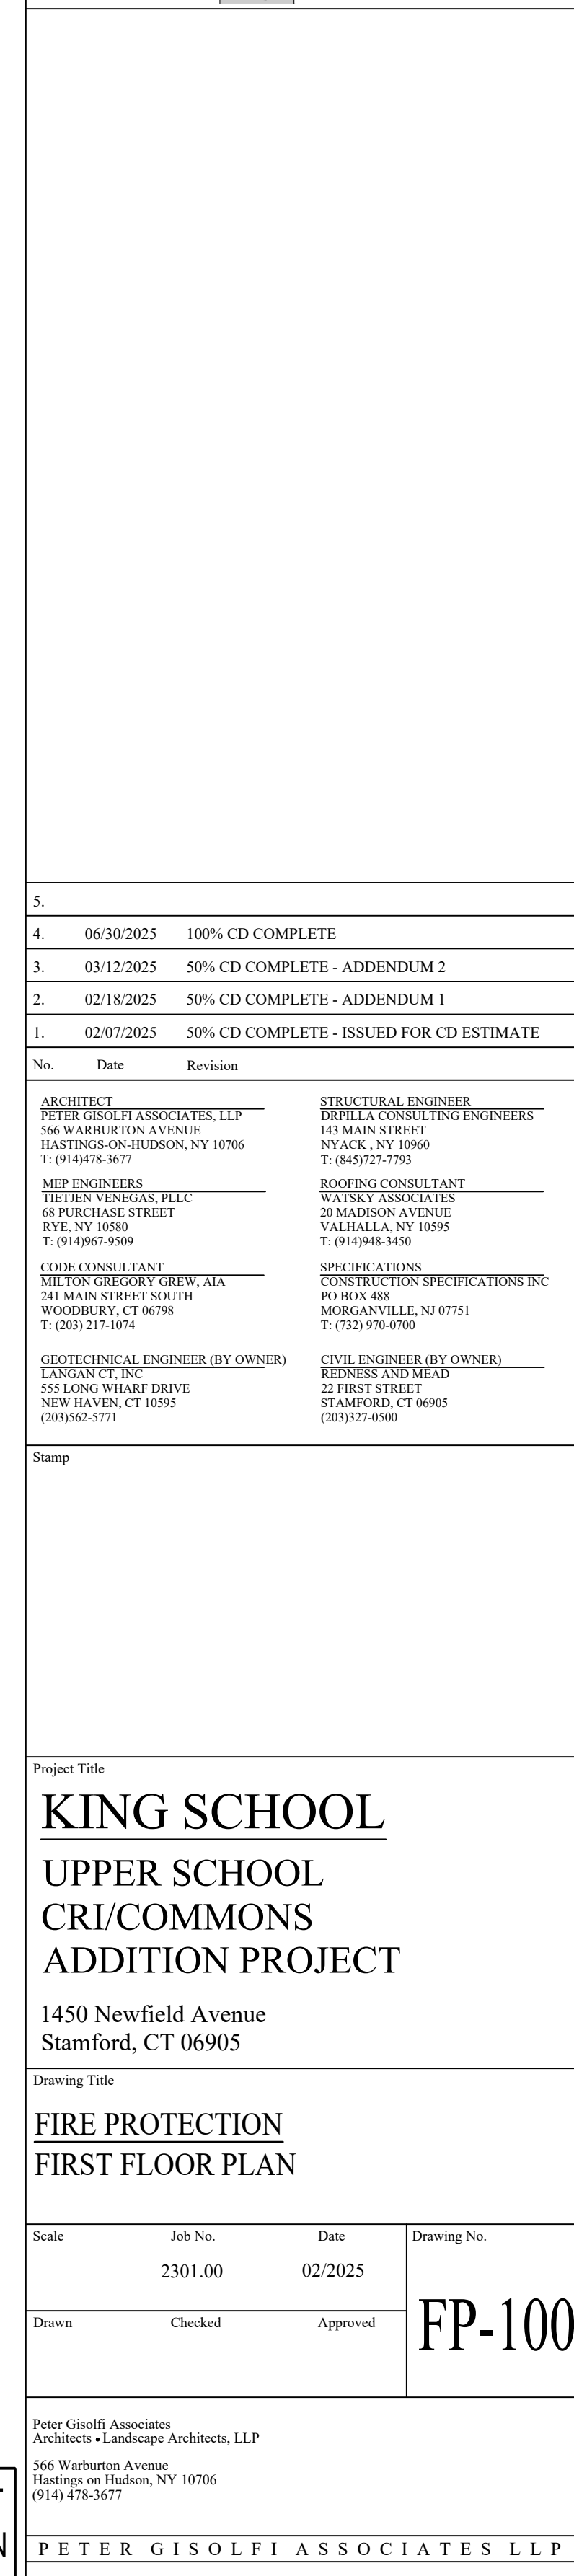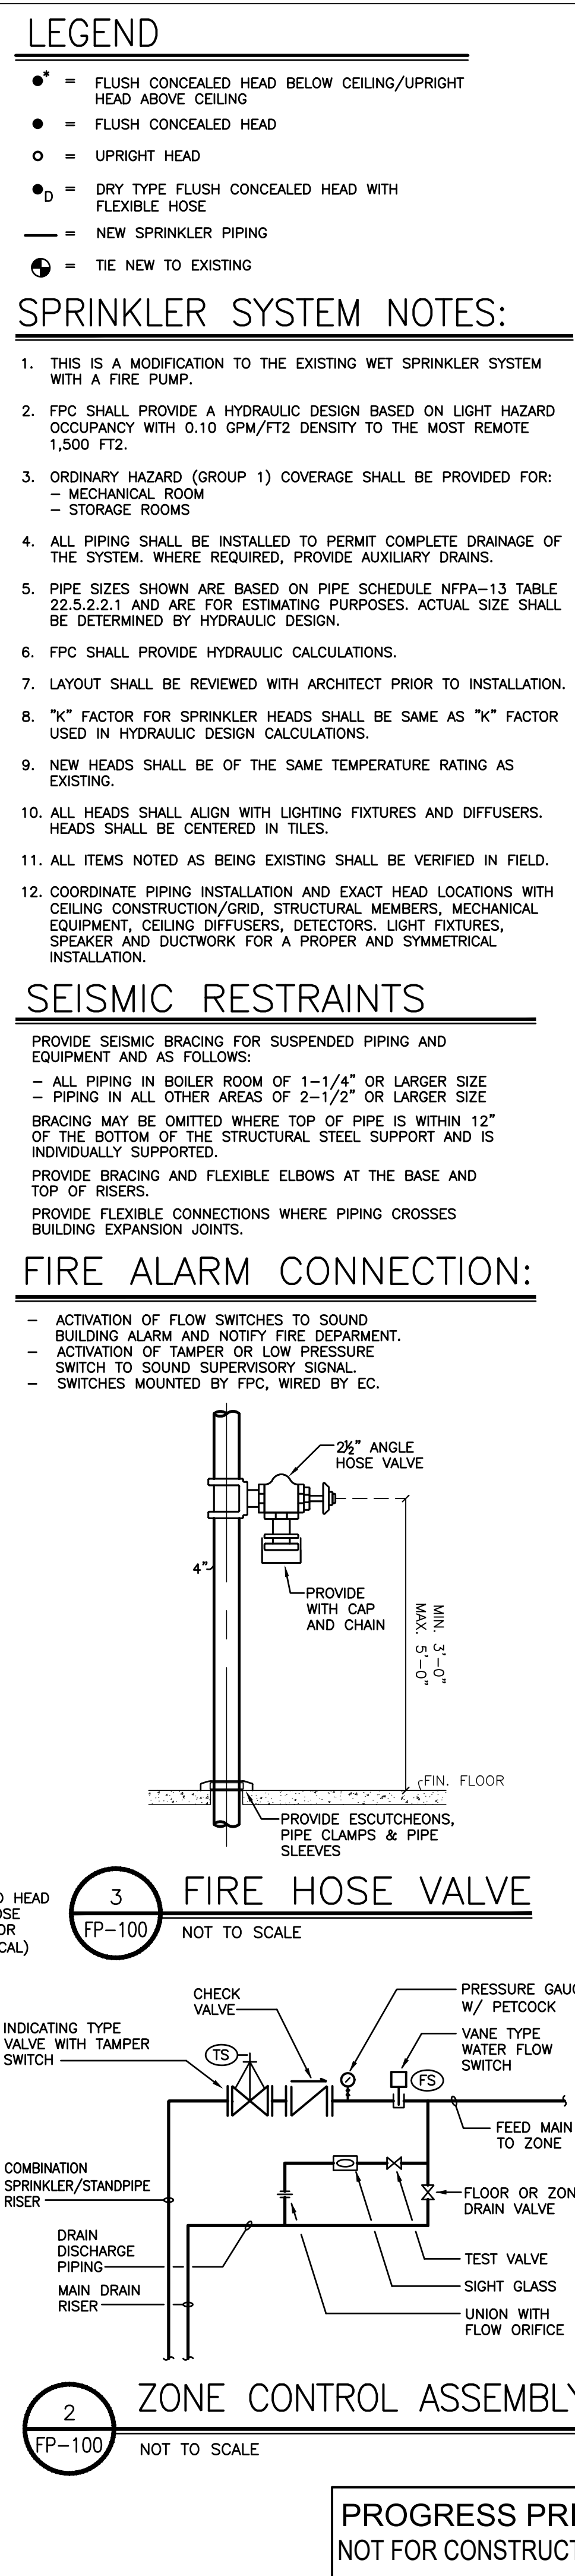

PROGRESS PRINT
NOT FOR CONSTRUCTION
08/20/25

T:\North\2023\2302 KING SCHOOL UPPER SCHOOL CR1 COMMONS ADDITION PROJECT\2302 14-100_101 FIRST FLOOR PLAN - DUCTWORK.dwg, 9/20/2025 5:05:35 PM, ARCH full bleed D (36.00 x 24.00 inches), F.G.

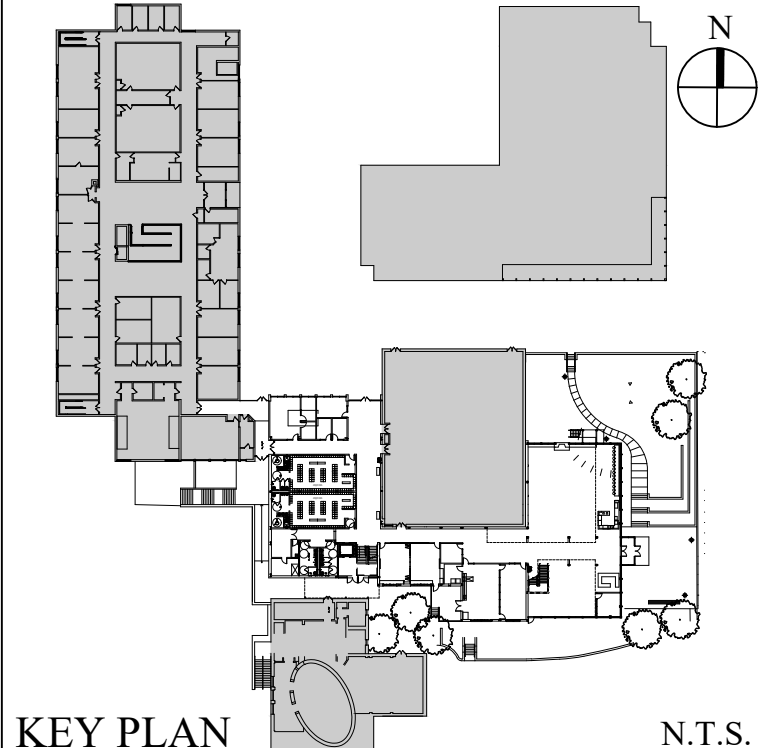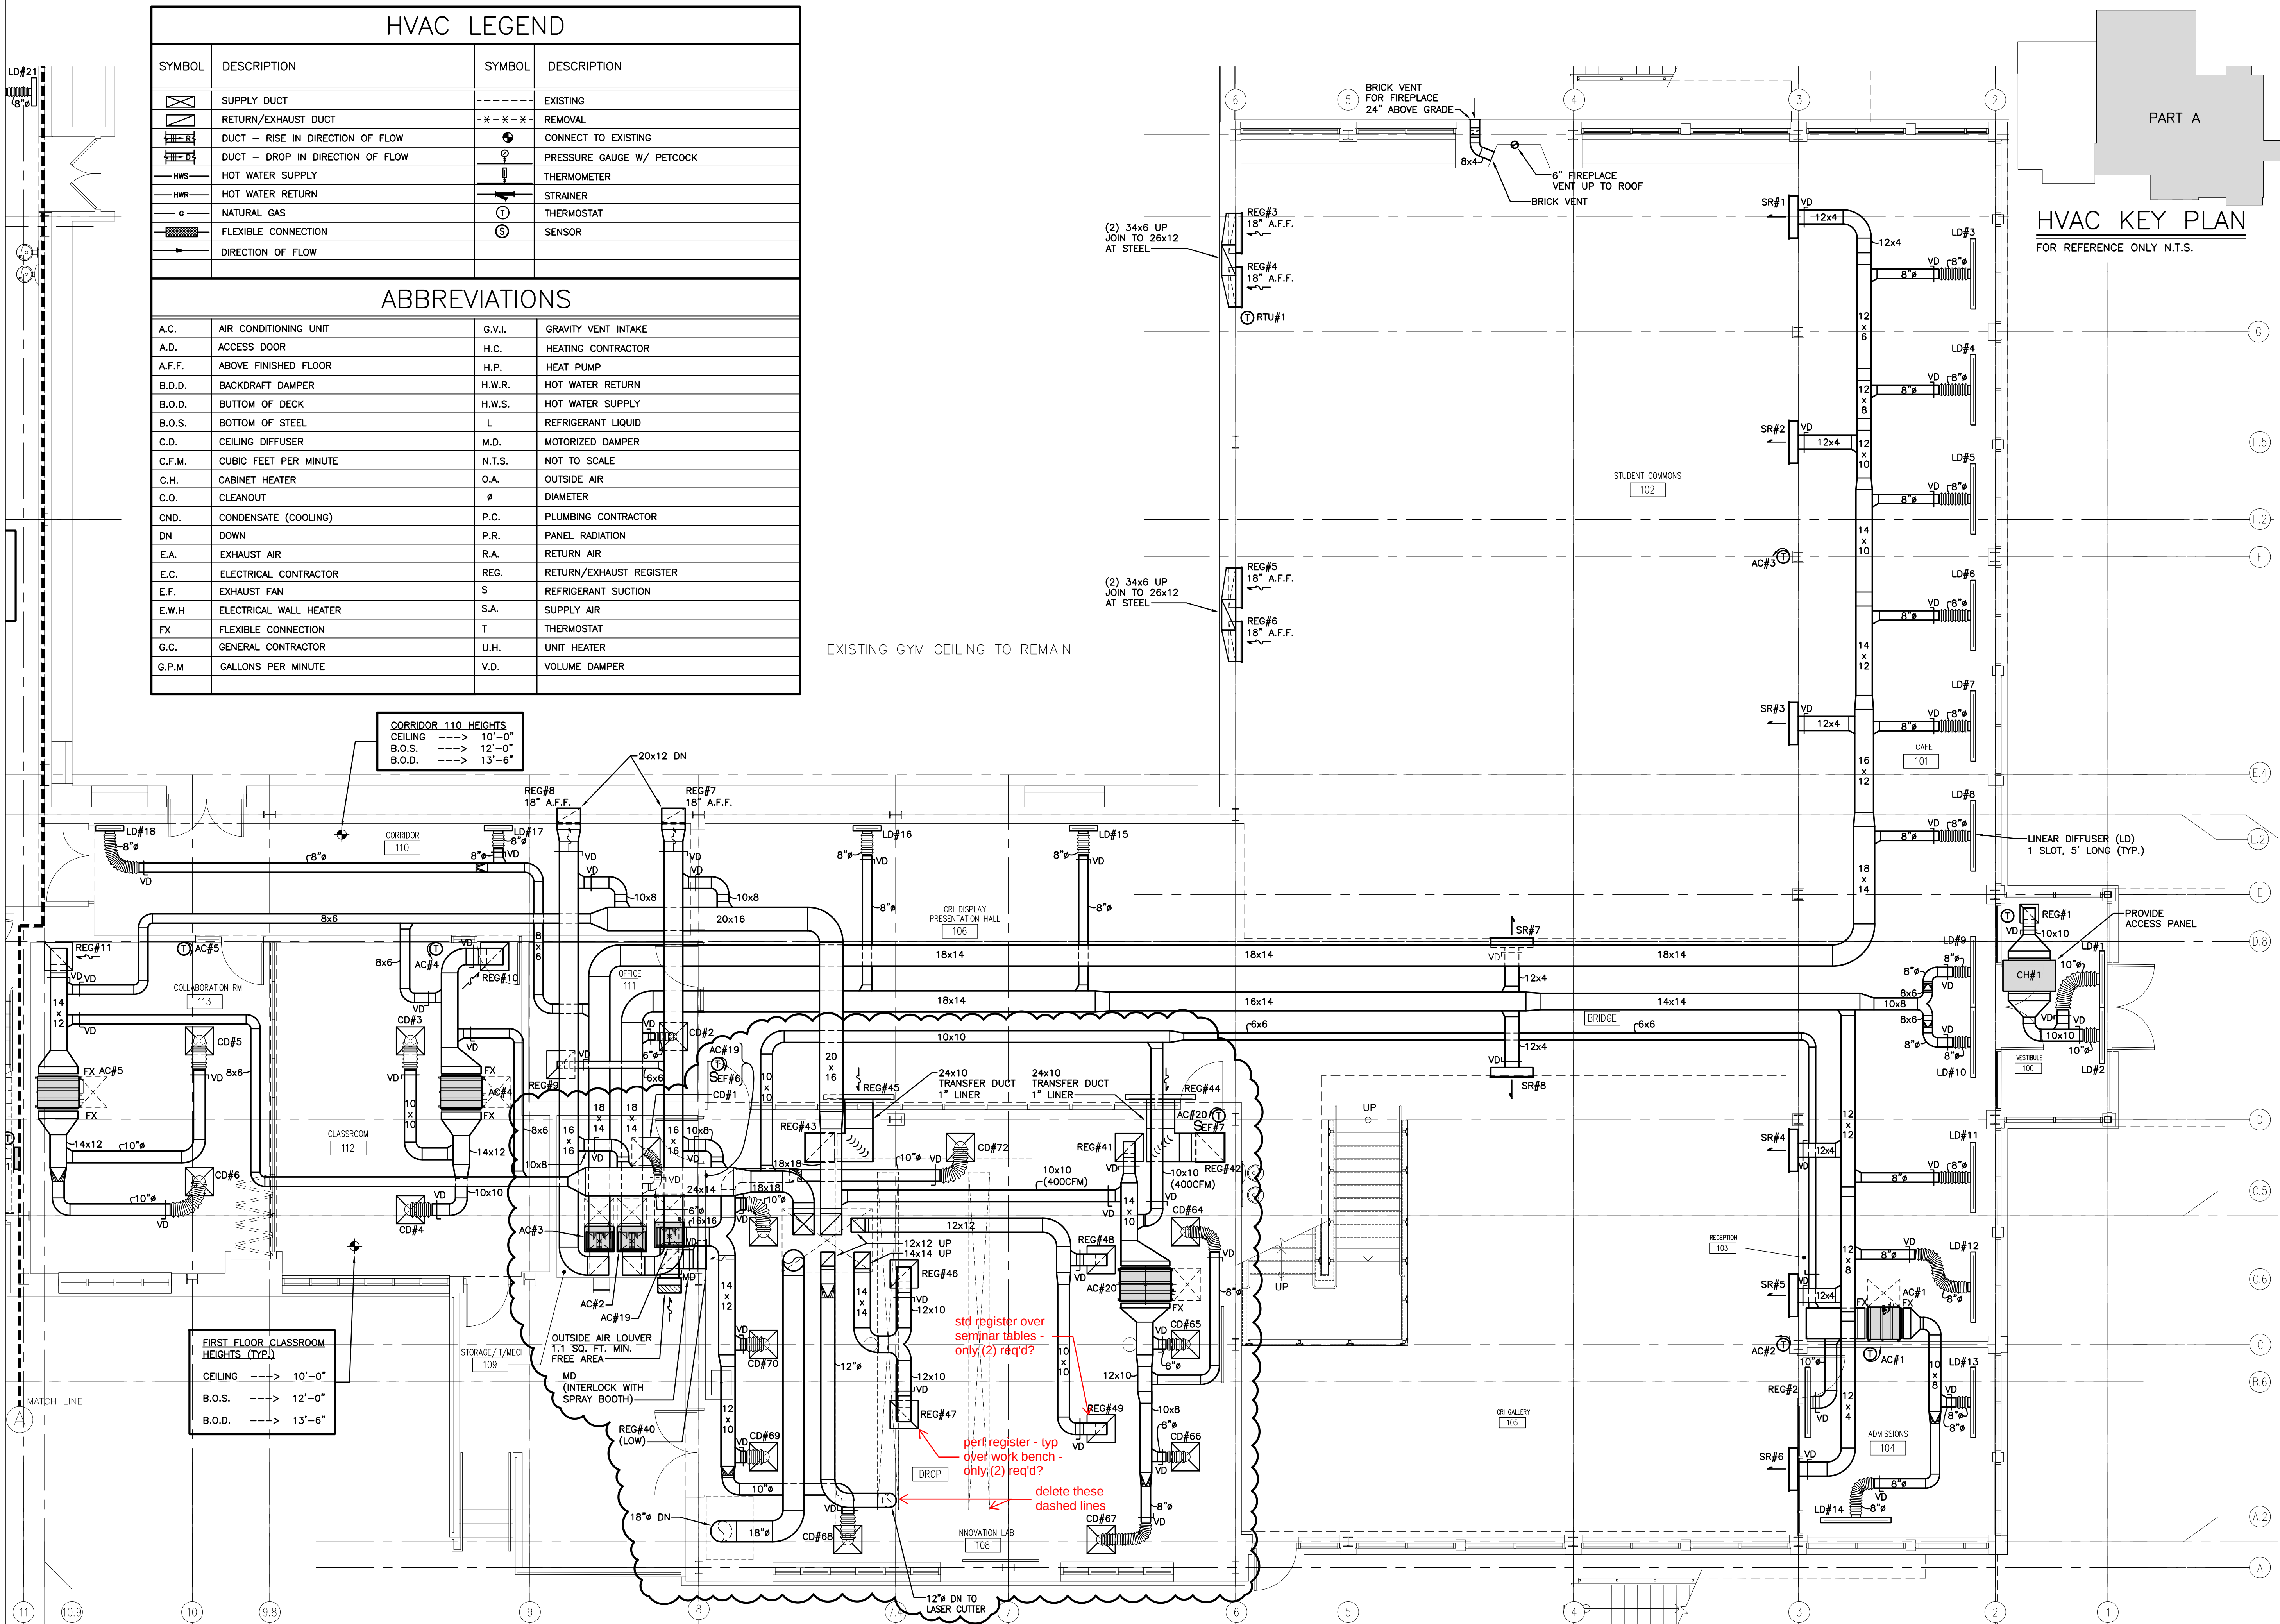

Revision		
5.		
4.	06/30/2025	100% CD COMPLETE
3.	03/12/2025	50% CD COMPLETE - ADDENDUM 2
2.	02/18/2025	50% CD COMPLETE - ADDENDUM 1
1.	02/07/2025	50% CD COMPLETE - ISSUED FOR CD ESTIMATE
No.	Date	Revision
ARCHITECT PETER GISOLFI ASSOCIATES, LLP 566 WARBURTON AVENUE HASTINGS-ON-HUDSON, NY 10706 T: (914) 478-3677		
STRUCTURAL ENGINEER DRIPPLA CONSULTING ENGINEERS 143 MAIN STREET NYACK, NY 10960 T: (845) 727-7793		
MEP ENGINEERS WATKINS ENGINEERS, PLLC 68 PURCHASE STREET RYE, NY 10580 T: (914) 967-8509		
ROOFING CONSULTANT WATKINS ASSOCIATES 20 MADISON AVENUE VALHALLA, NY 10985 T: (914) 488-3450		
CODE CONSULTANT WILFORD GREGORY CREW, AIA 241 MAIN STREET SOUTH WOODBURY, CT 06798 T: (203) 217-1074		
SPECIFICATIONS CONSTRUCTION SPECIFICATIONS INC. PO BOX 488 MORGANVILLE, NJ 07751 T: (203) 927-6500		
GEOTECHNICAL ENGINEER (BY OWNER) LANGAN CT, INC. 355 LONG WHARF DRIVE NEW HAVEN, CT 06595 (203) 962-5771		
CIVIL ENGINEER (BY OWNER) REDNESS AND MEAD 22 FIRST STREET STAMFORD, CT 06905 (203) 327-6500		
Project Title		
KING SCHOOL UPPER SCHOOL CRI/COMMONS ADDITION PROJECT		
1450 Newfield Avenue Stamford, CT 06905		
Drawing Title		
HVAC FIRST FLOOR PLAN - PART A DUCTWORK		
Scale	Job No.	Date
	2301.00	02/2025
Drawn	Checked	Approved
		H-100
Peter Gisolfi Associates Architects + Landscape Architects, LLP 566 Warburton Avenue Hastings on Hudson, NY 10706 (914) 478-3677		
PETER GISOLFI ASSOCIATES LLP		

1
H-100



FIRST FLOOR PLAN - PART A - DUCTWORK

SCALE: 3/16" = 1'-0"




PROGRESS PRINT
NOT FOR CONSTRUCTION
08/20/25

T:\North\2023\2302 KING SCHOOL-UPPER SCHOOL CRI+COMMONS ADDITION PROJECT\2302 H-102_103 SECOND FLOOR PLAN - DUCTWORK.dwg, 8/20/2025 5:06:10 PM, ARCH full bleed D (36.00 x 24.00 inches), F.G.

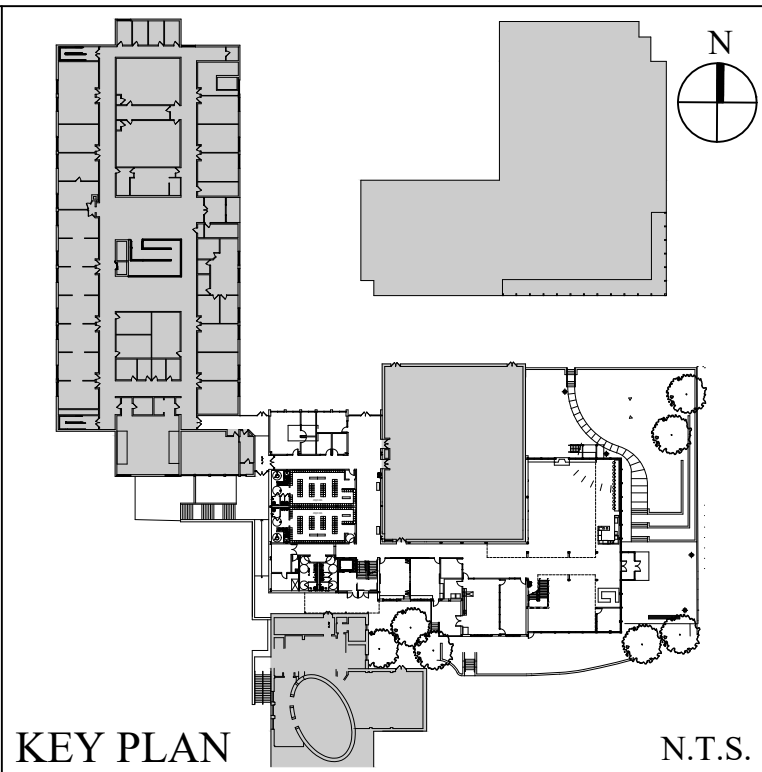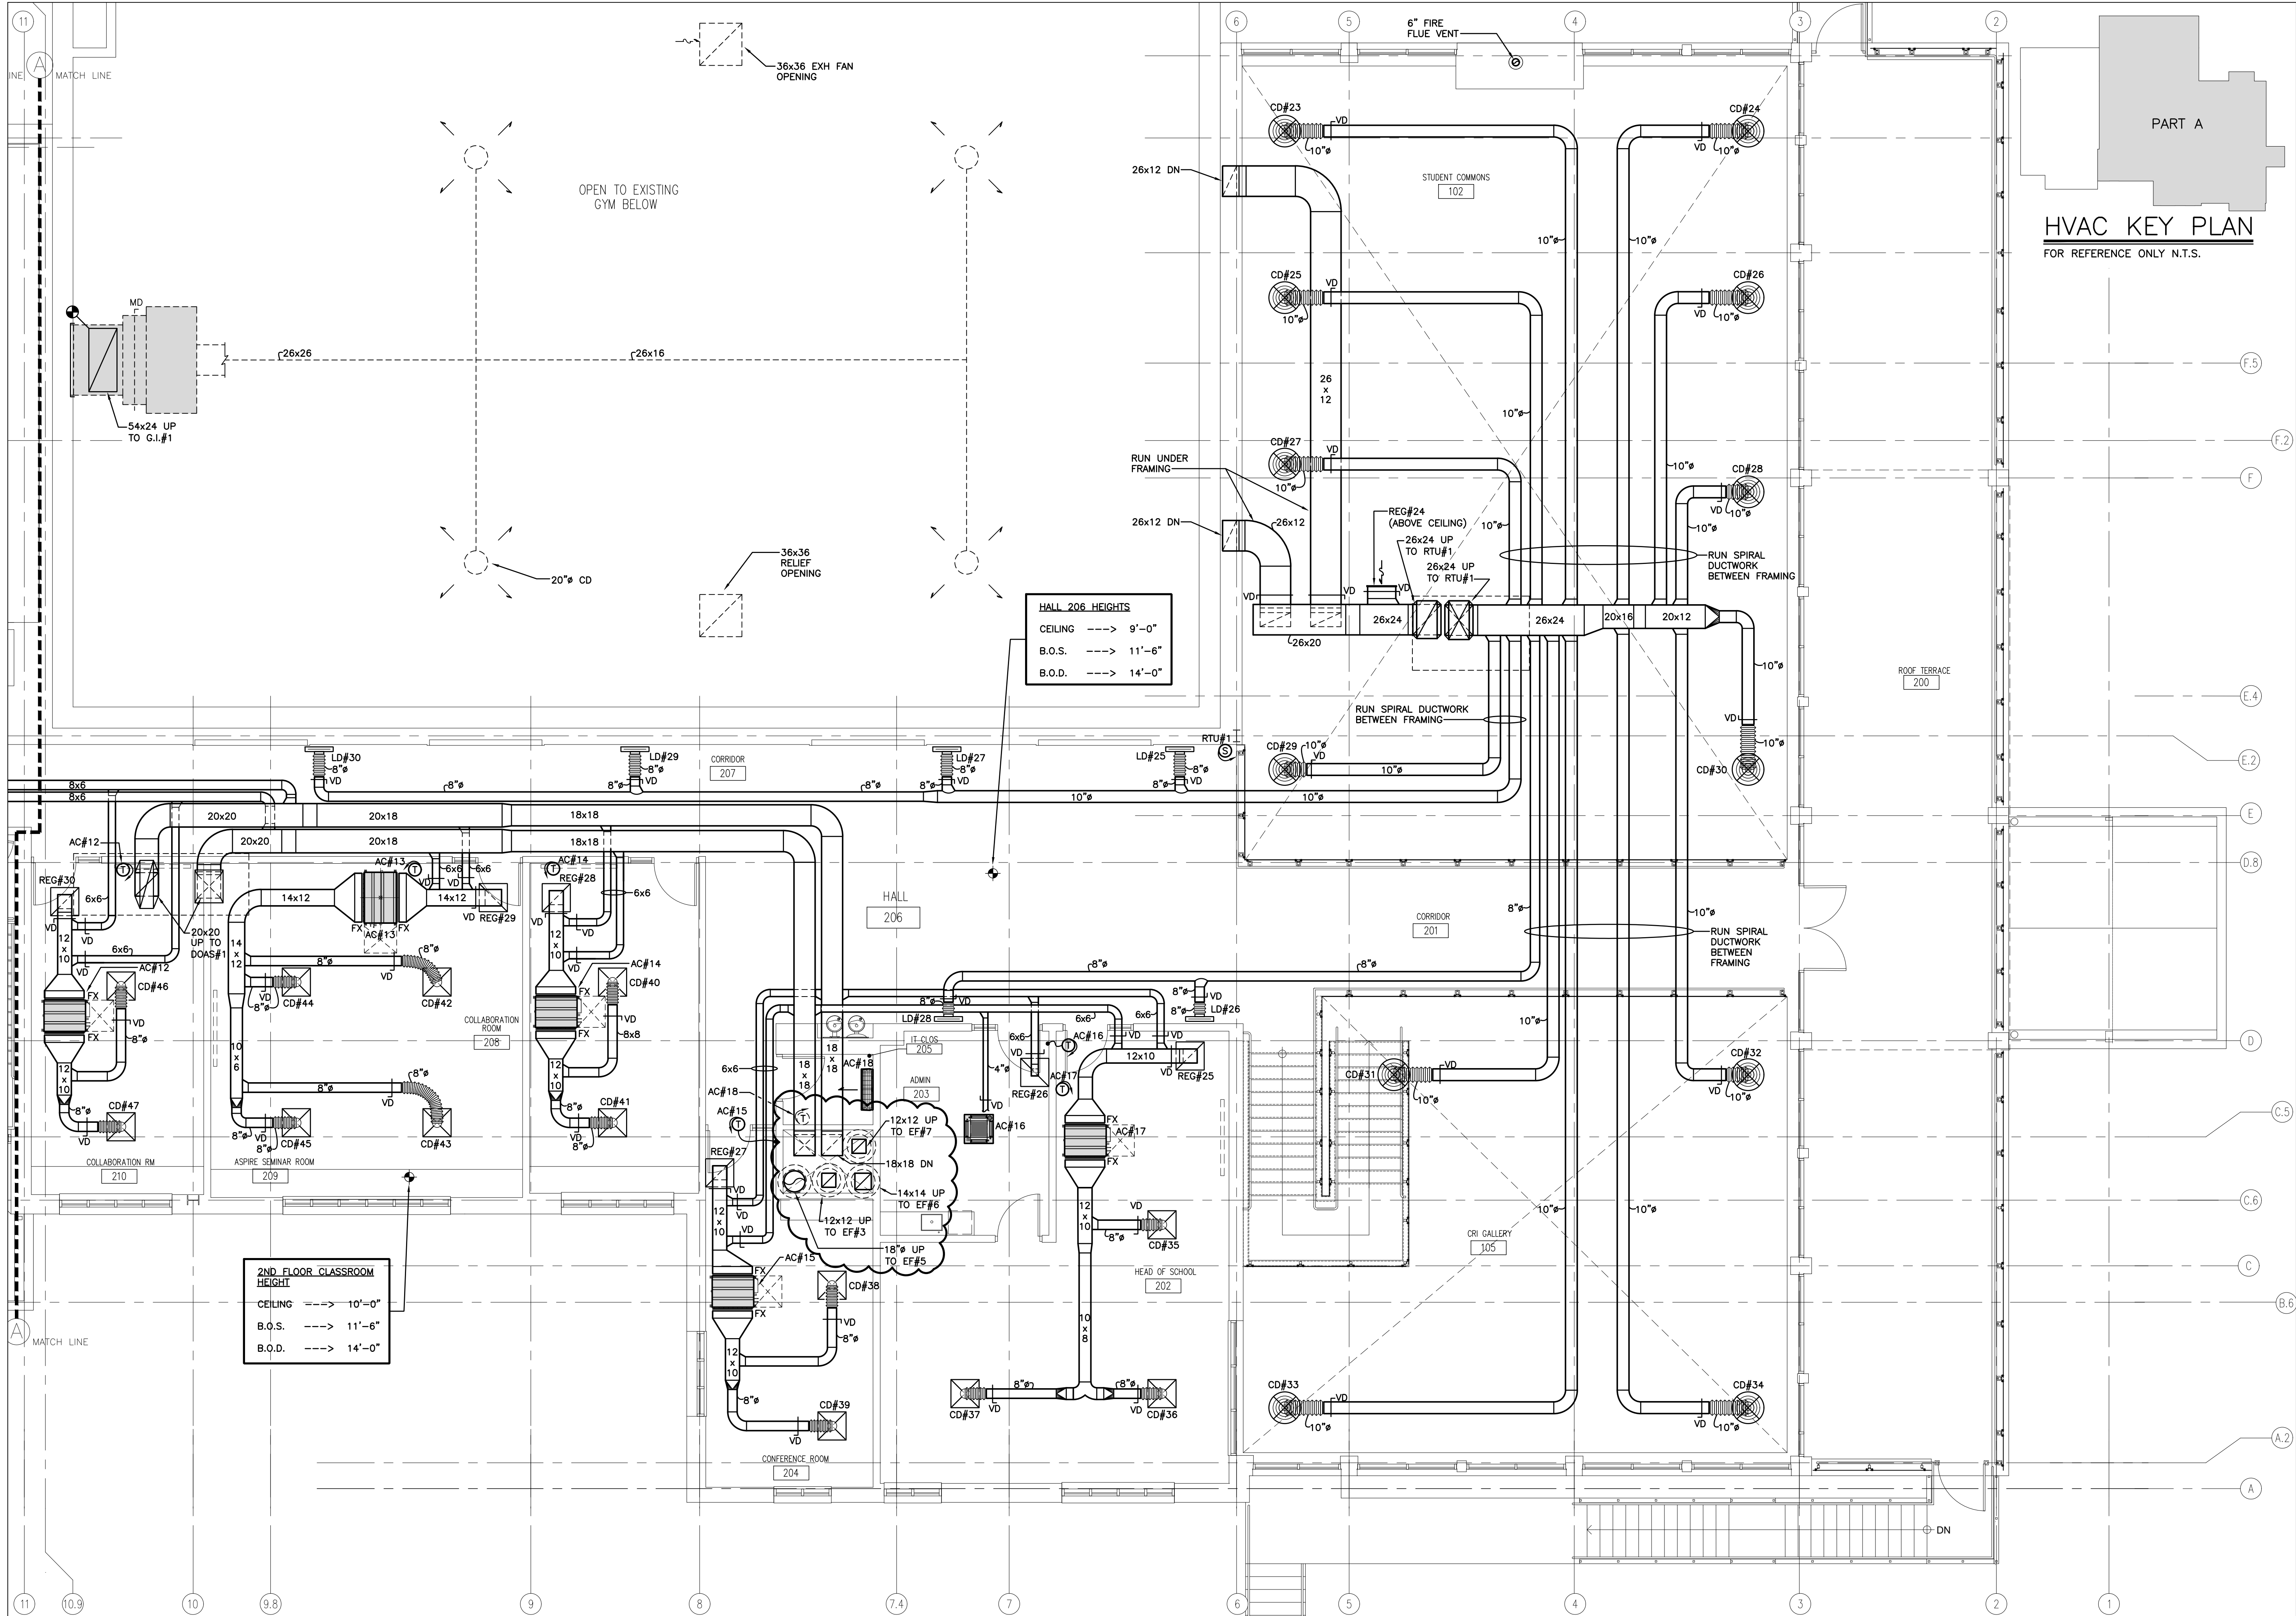

5.			
4.	06/30/2025	100% CD COMPLETE	
3.	03/12/2025	50% CD COMPLETE - ADDENDUM 2	
2.	02/18/2025	50% CD COMPLETE - ADDENDUM 1	
1.	02/07/2025	50% CD COMPLETE - ISSUED FOR CD ESTIMATE	
No.	Date	Revision	
ARCHITECT PETER GISOLFI ASSOCIATES, LLP 566 WARBURTON AVENUE HASTINGS-ON-HUDSON, NY 10706 T: (914)478-3677		STRUCTURAL ENGINEER DRPILLA CONSULTING ENGINEERS 143 MAIN STREET NYACK, NY 10960 T: (845)727-7793	
MEP ENGINEERS TETTER VENIGAS, PLLC 68 PURCHASE STREET RYE, NY 10580 T: (914)667-8509		ROOFING CONSULTANT WATSKY ASSOCIATES 20 MADISON AVENUE VALHALLA, NY 10595 T: (914)948-3450	
CODE CONSULTANT MILTON GREGORY GREW, AIA 241 MAIN STREET SOUTH WOODBURY, CT 06798 T: (203) 217-1074		SPECIFICATIONS CONSTRUCTION SPECIFICATIONS INC. PO BOX 485 MORGANVILLE, NJ 07751 T: (732) 970-0700	
GEOTECHNICAL ENGINEER (BY OWNER) LANGAN CT, INC. 555 LONG WHARF DRIVE NEW HAVEN, CT 06595 (203)962-5771		CIVIL ENGINEER (BY OWNER) REDNESS AND MEAD 22 FIRST STREET STAMFORD, CT 06905 (203)327-0500	
Stamp			
Project Title			
KING SCHOOL			
UPPER SCHOOL			
CRI/COMMONS			
ADDITION PROJECT			
1450 Newfield Avenue Stamford, CT 06905			
Drawing Title			
HVAC			
SECOND FLOOR PLAN - PART A			
DUCTWORK			
Scale	Job No.	Date	Drawing No.
	2301.00	02/2025	
Drawn	Checked	Approved	H-102
Peter Gisolfi Associates Architects • Landscape Architects, LLP 566 Warburton Avenue Hastings on Hudson, NY 10706 (914) 478-3677			
PETER GISOLFI ASSOCIATES LLP			
PROGRESS PRINT NOT FOR CONSTRUCTION 08/20/25			


T:\North\2023\2302 KING SCHOOL UPPER SCHOOL CRI/COMMONS ADDITION PROJECT\2302 H-104 ROOF PLAN - DUCTWORK.dwg, 8/20/2025 5:08:02 PM, ARCH Full bleed D (36.00 x 24.00 inches), F.G.

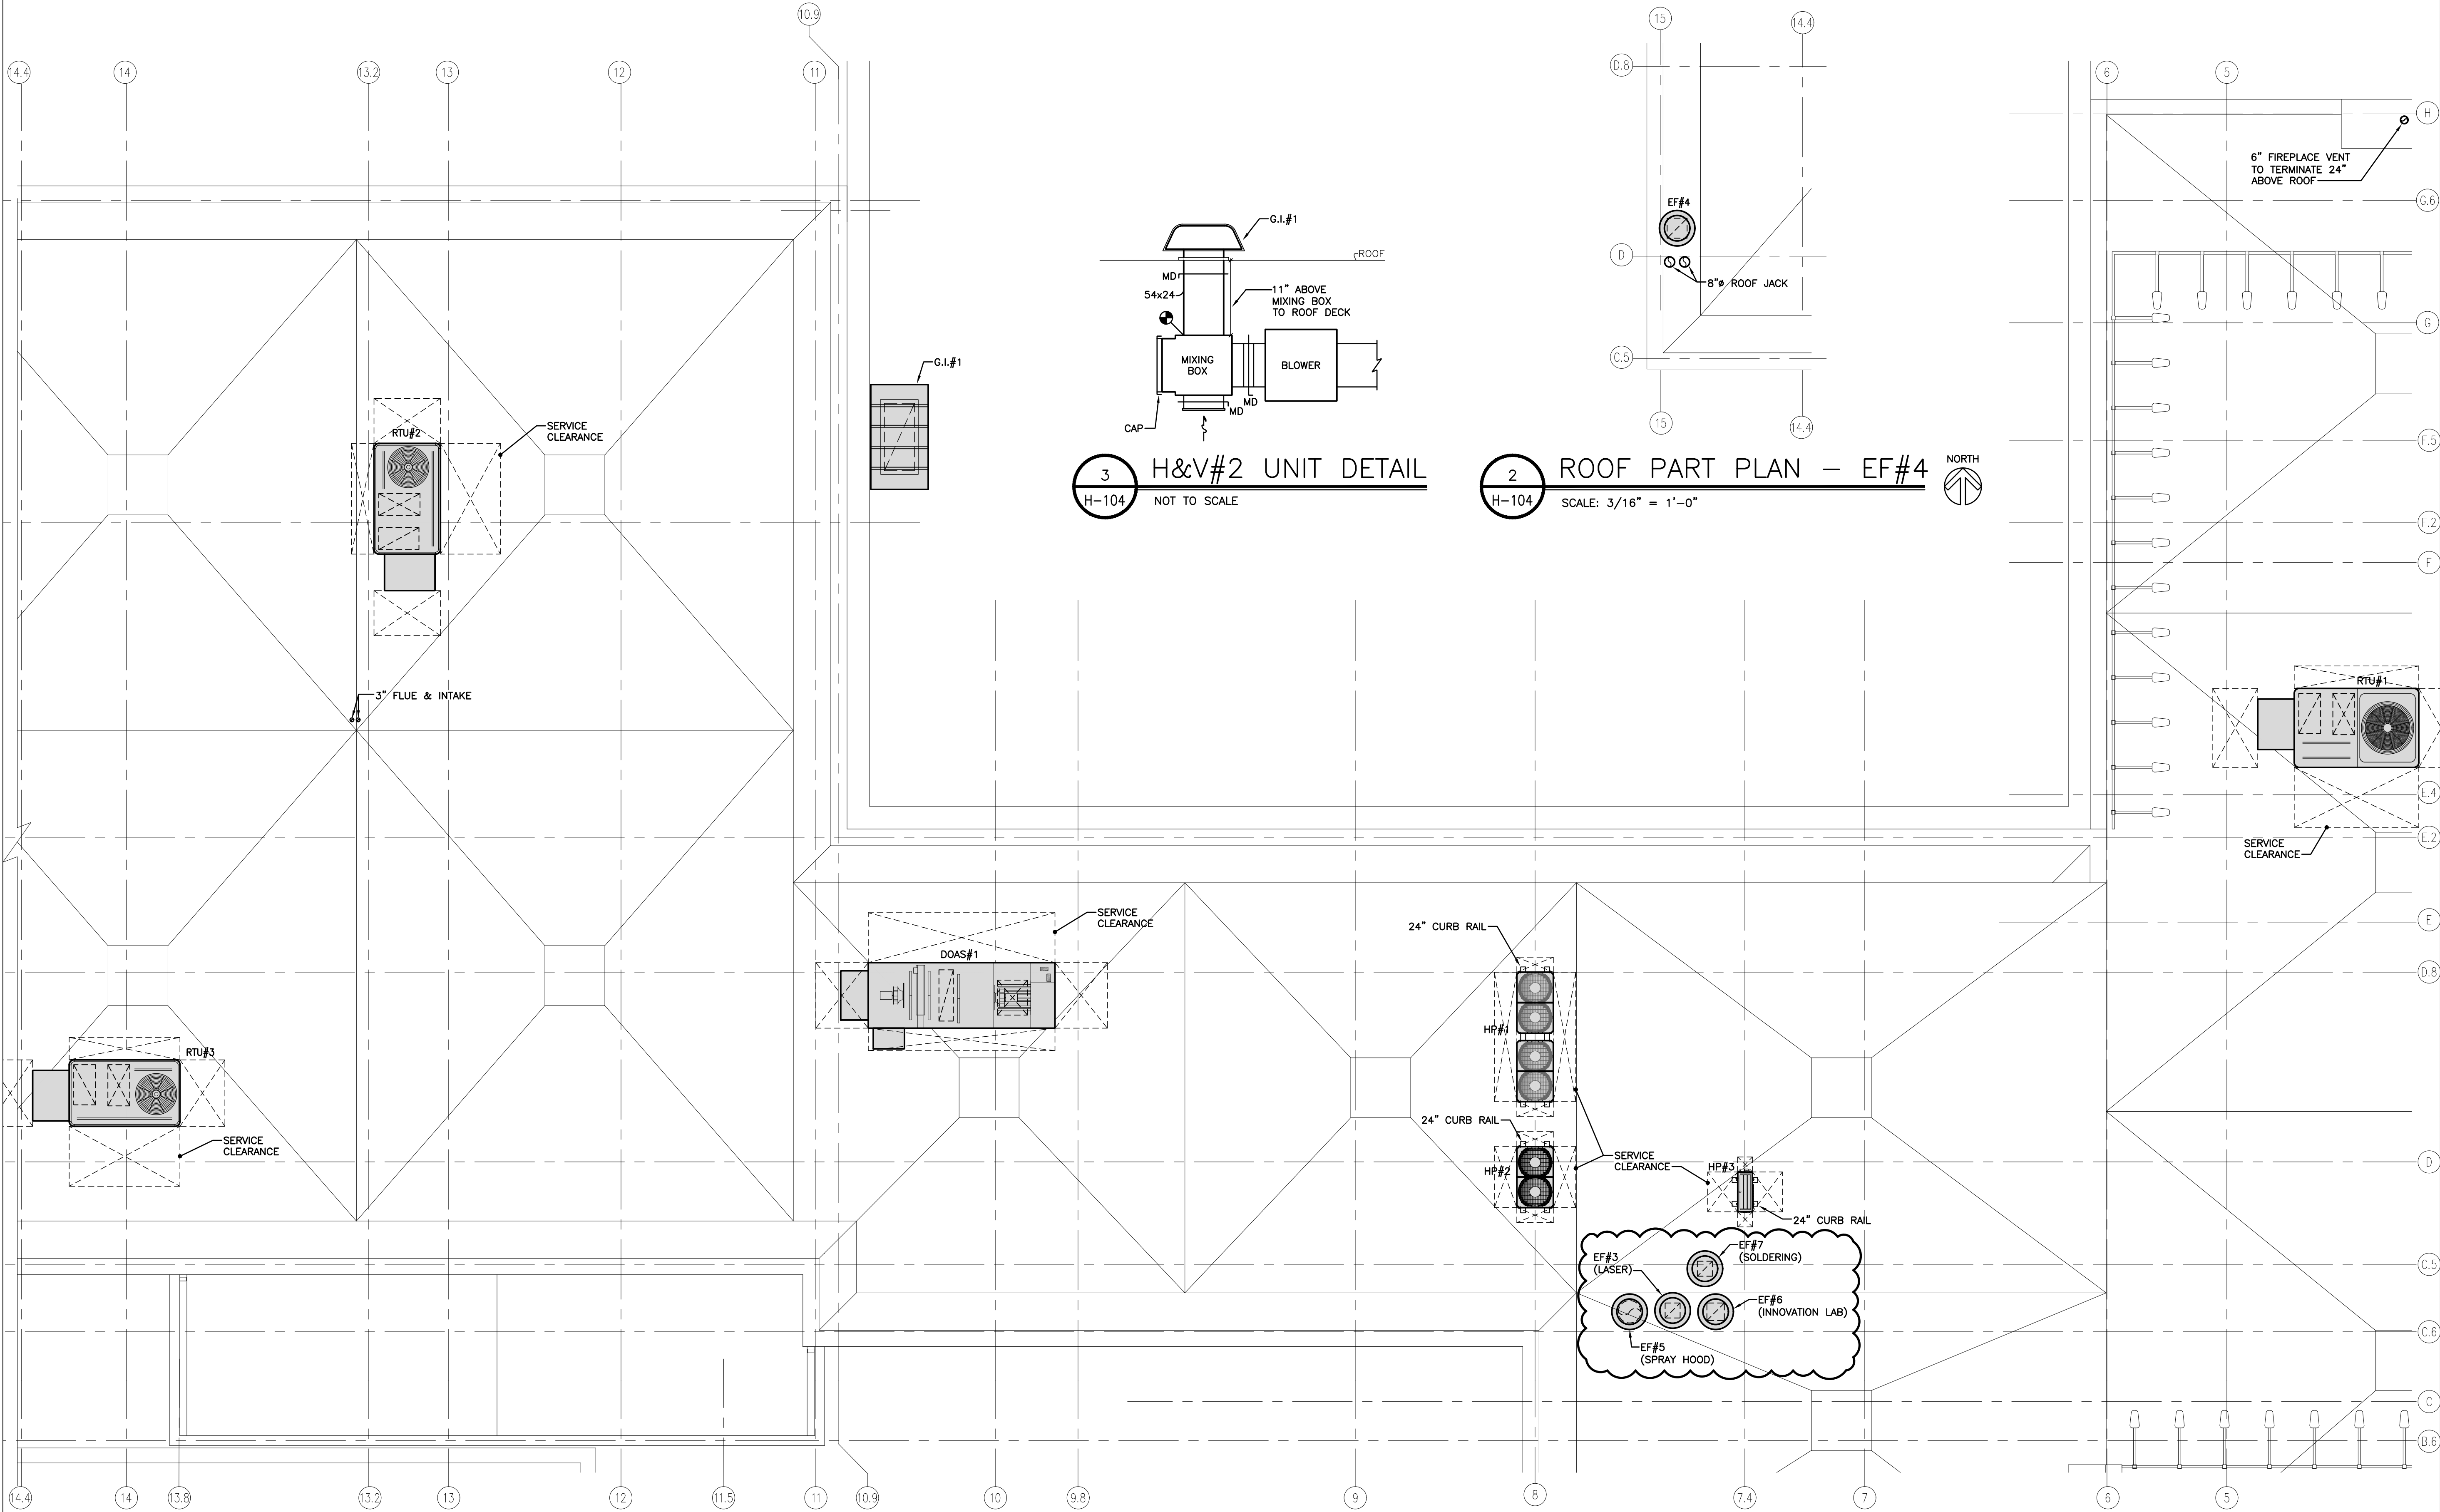

1 ROOF PLAN — HVAC — DUCTWORK
H-104 SCALE: 3/16" = 1'-0"

2 ROOF PART PLAN — EF#4
H-104 SCALE: 3/16" = 1'-0"

3 H&V#2 UNIT DETAIL
H-104 NOT TO SCALE

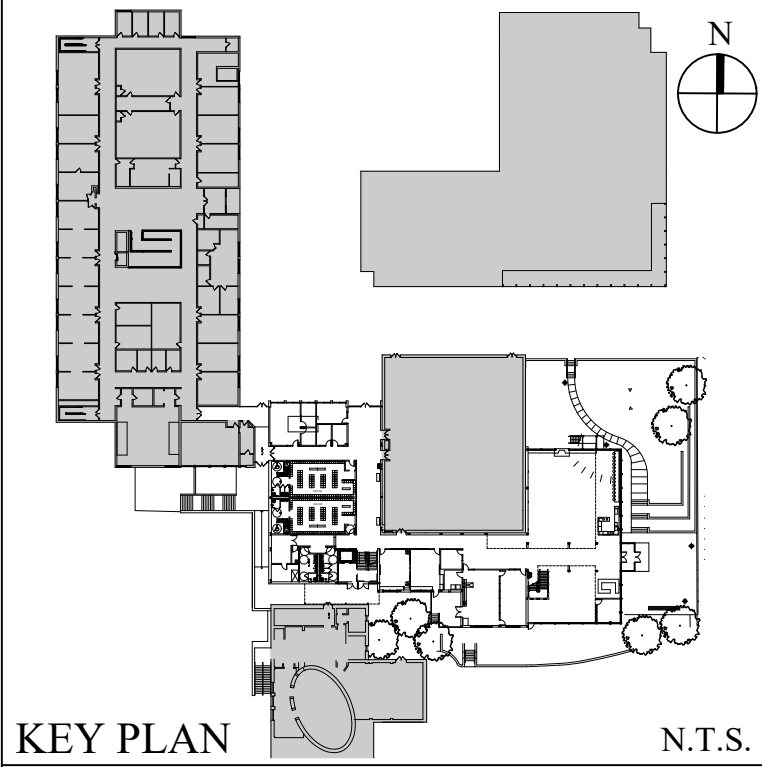

KEY PLAN N.T.S.

No.	Date	Revision
5.		
4.	06/30/2025	100% CD COMPLETE
3.	03/12/2025	50% CD COMPLETE - ADDENDUM 2
2.	02/18/2025	50% CD COMPLETE - ADDENDUM 1
1.	02/07/2025	50% CD COMPLETE - ISSUED FOR CD ESTIMATE
No. Date Revision		
ARCHITECT PETER GISOLFI ASSOCIATES, LLP 566 WARBURTON AVENUE HAUSTINGS-ON-HUDSON, NY 10706 T: (914) 478-3677		
MEP ENGINEERS WATSKY ASSOCIATES, PLLC 68 PURCHASE STREET BYE, NY 10580 T: (914) 4967-8509		
CODE CONSULTANT BILLY GREGORY GREW, AIA 241 MAIN STREET SOUTH WOODBURY, CT 06798 T: (203) 217-1074		
GEOTECHNICAL ENGINEER (BY OWNER) LANGAN CT, INC. 355 LONG WHARF DRIVE NEW HAVEN, CT 06515 (203) 962-5771		
STRUCTURAL ENGINEER DRPILLA CONSULTING ENGINEERS 143 MAIN STREET NYACK, NY 10960 T: (845) 727-7793		
ROOFING CONSULTANT WATSKY ASSOCIATES 20 MADISON AVENUE VALHALLA, NY 10595 T: (914) 948-3450		
SPECIFICATIONS CONSTRUCTION SPECIFICATIONS INC. PO BOX 488 MORRISVILLE, NJ 07751 T: (732) 970-0700		
CIVIL ENGINEER (BY OWNER) REDNESS AND MEAD 22 FIRST STREET STAMFORD, CT 06905 (203) 327-0500		

Project Title
**KING SCHOOL
UPPER SCHOOL
CRI/COMMONS
ADDITION PROJECT**
1450 Newfield Avenue
Stamford, CT 06905



Drawing Title
**HVAC
ROOF PLAN - DUCTWORK**

Scale	Job No.	Date	Drawing No.
	2301.00	02/2025	H-104
Drawn	Checked	Approved	

Peter Gisolfi Associates
Architects + Landscape Architects, LLP
566 Warburton Avenue
Hastings on Hudson, NY 10706
(914) 478-3677
PETER GISOLFI ASSOCIATES LLP

**PROGRESS PRINT
NOT FOR CONSTRUCTION
08/20/25**

T:\North\2023\2302 KING SCHOOL-UPPER SCHOOL CRI+COMMONS ADDITION PROJECT\2302 14-105 FIRST FLOOR PLAN - PIPING.dwg, 8/20/2025 5:05:29 PM, ARCH 141, Sheet D (36.00 x 24.00 inches), F.G.

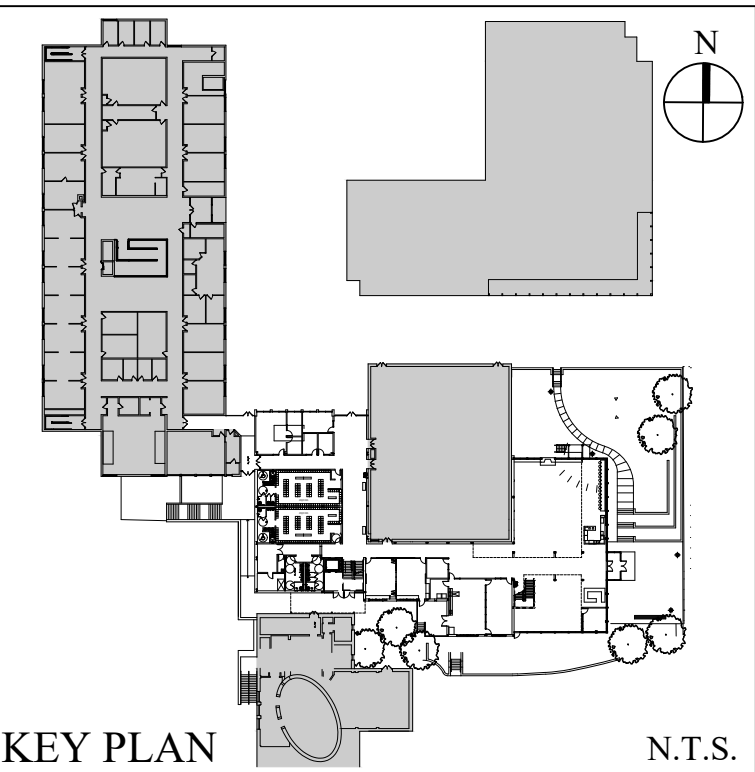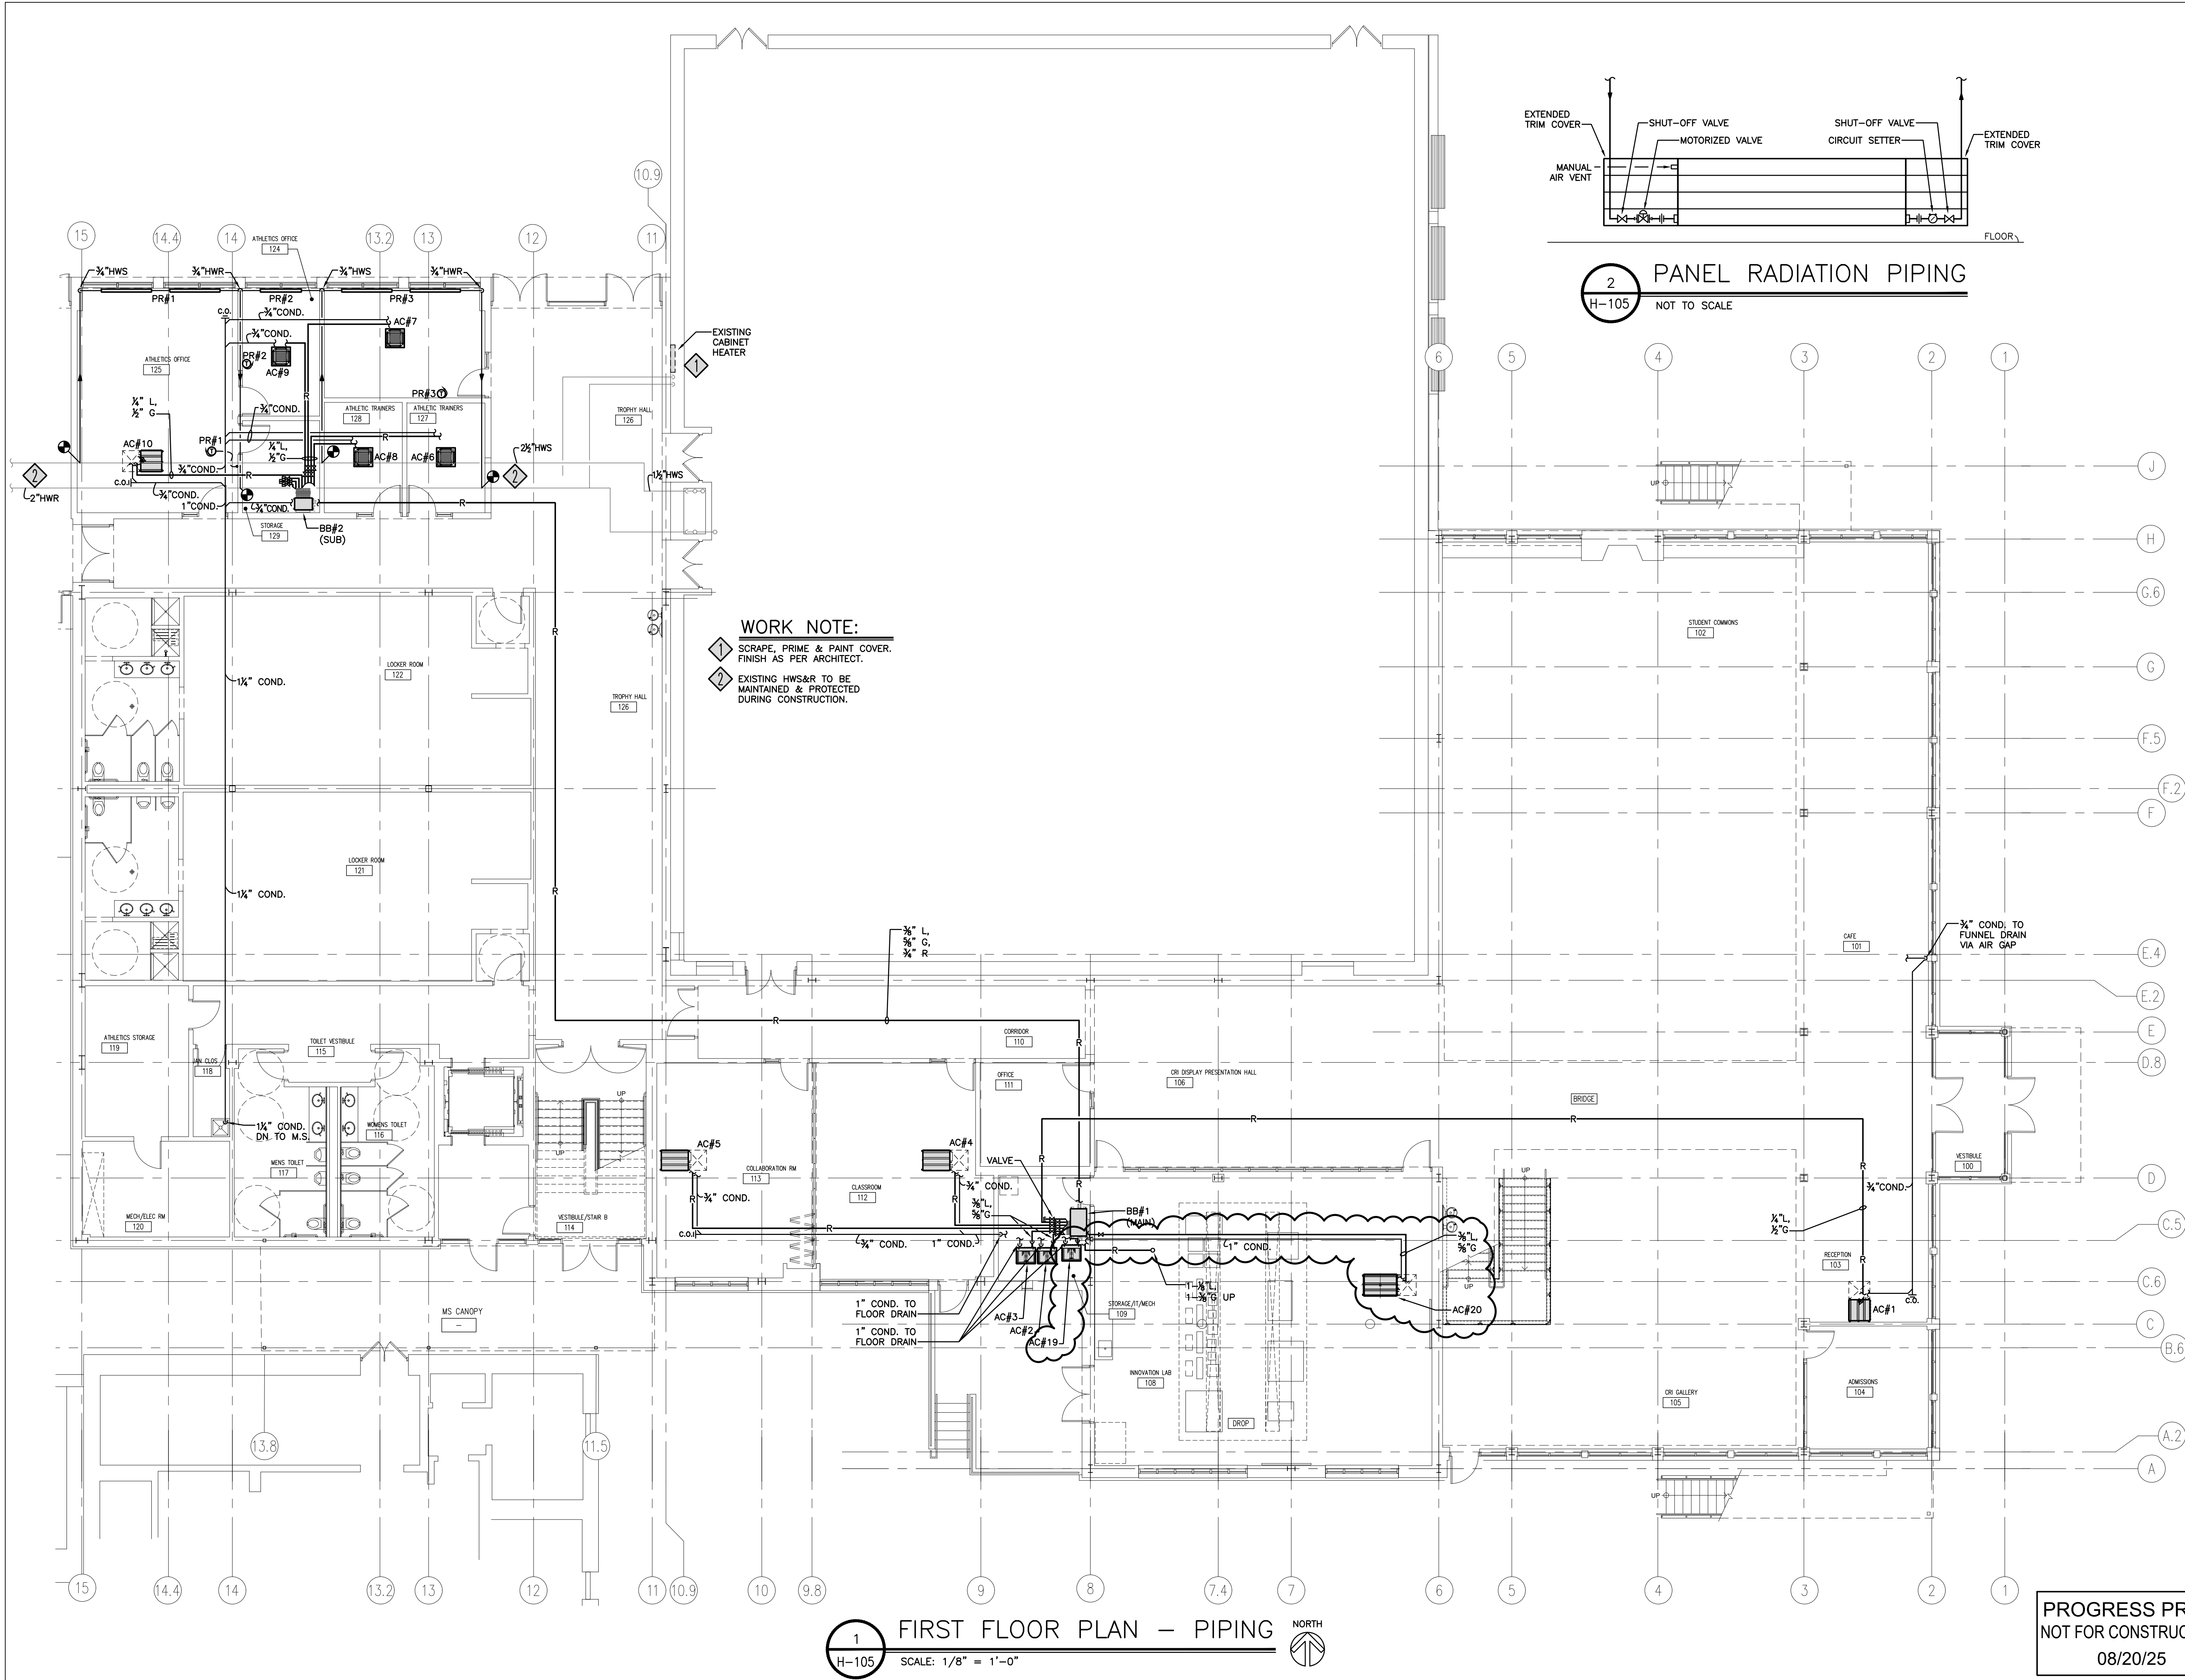

KEY PLAN N.T.S.

No.	Date	Revision
5.		
4.	06/30/2025	100% CD COMPLETE
3.	03/12/2025	50% CD COMPLETE - ADDENDUM 2
2.	02/18/2025	50% CD COMPLETE - ADDENDUM 1
1.	02/07/2025	50% CD COMPLETE - ISSUED FOR CD ESTIMATE
ARCHITECT		
PETER GISOLFI ASSOCIATES, LLP		
566 WARBURTON AVENUE		
HASTINGS-ON-HUDSON, NY 10706		
T: (914) 478-3677		
MEP ENGINEERS		
WATSKY ASSOCIATES, PLLC		
68 PURCHASE STREET		
BYE, NY 10580		
T: (914) 967-8509		
CODE CONSULTANT		
WILFORD GREGORY GREW, AIA		
241 MAIN STREET SOUTH		
WOODBURY, CT 06798		
T: (203) 217-1074		
GEOTECHNICAL ENGINEER (BY OWNER)		
LANGAN CT, INC.		
355 LONG WHARF DRIVE		
NEW HAVEN, CT 06515		
(203) 962-5771		
STRUCTURAL ENGINEER		
DRPILA CONSULTING ENGINEERS		
143 MAIN STREET		
NYACK, NY 10960		
T: (845) 727-7793		
ROOFING CONSULTANT		
WATSKY ASSOCIATES		
20 MADISON AVENUE		
VALHALLA, NY 10595		
T: (914) 948-3450		
SPECIFICATIONS		
CONSTRUCTION SPECIFICATIONS INC.		
PO BOX 488		
MORGANVILLE, NJ 07751		
T: (732) 970-0700		
CIVIL ENGINEER (BY OWNER)		
REDNESS AND MEAD		
22 FIRST STREET		
STAMFORD, CT 06905		
(203) 327-0500		

Stamp


Project Title
**KING SCHOOL
UPPER SCHOOL
CRI/Commons
ADDITION PROJECT**
1450 Newfield Avenue
Stamford, CT 06905

Drawing Title
**HVAC
FIRST FLOOR PLAN - PIPING**


Scale	Job No.	Date	Drawing No.
	2301.00	02/2025	
Drawn	Checked	Approved	
			H-105

Peter Gisolfi Associates
Architects • Landscape Architects, LLP
566 Warburton Avenue
Hastings on Hudson, NY 10706
(914) 478-3677
PETER GISOLFI ASSOCIATES LLP


**PROGRESS PRINT
NOT FOR CONSTRUCTION**
08/20/25

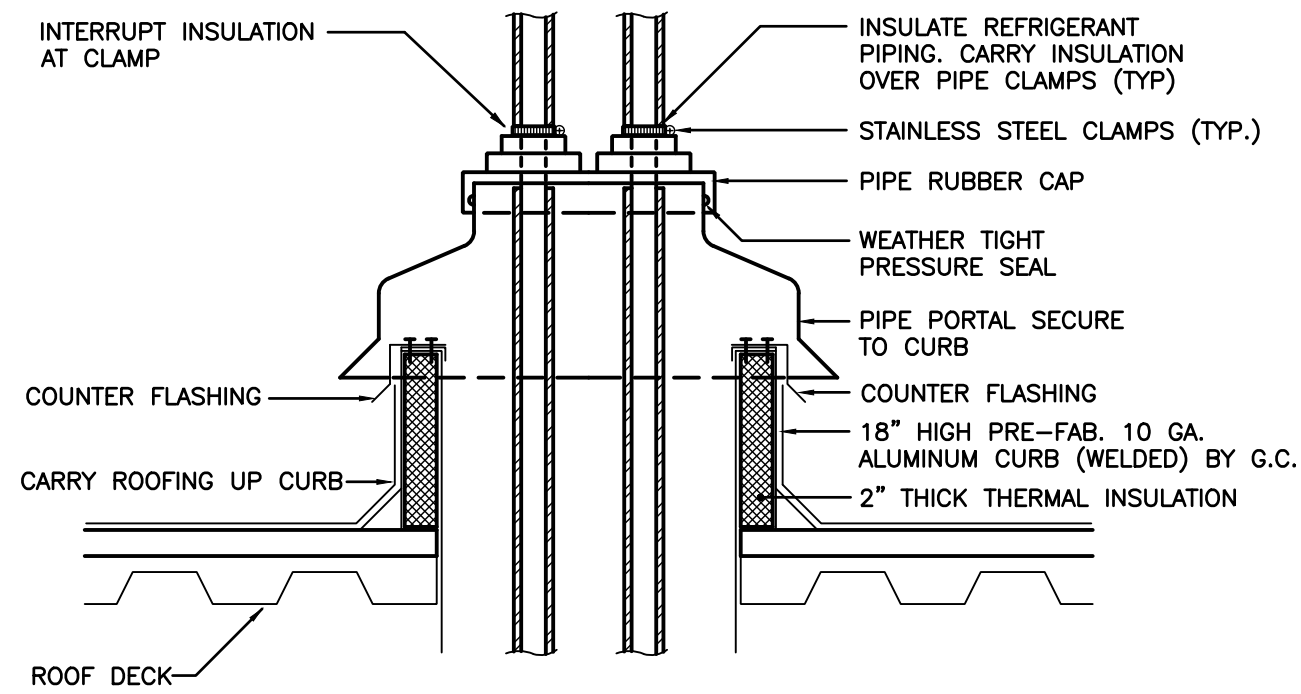


4 REFRIG. PIPING THROUGH ROOF DETAIL
H-107 NOT TO SCALE

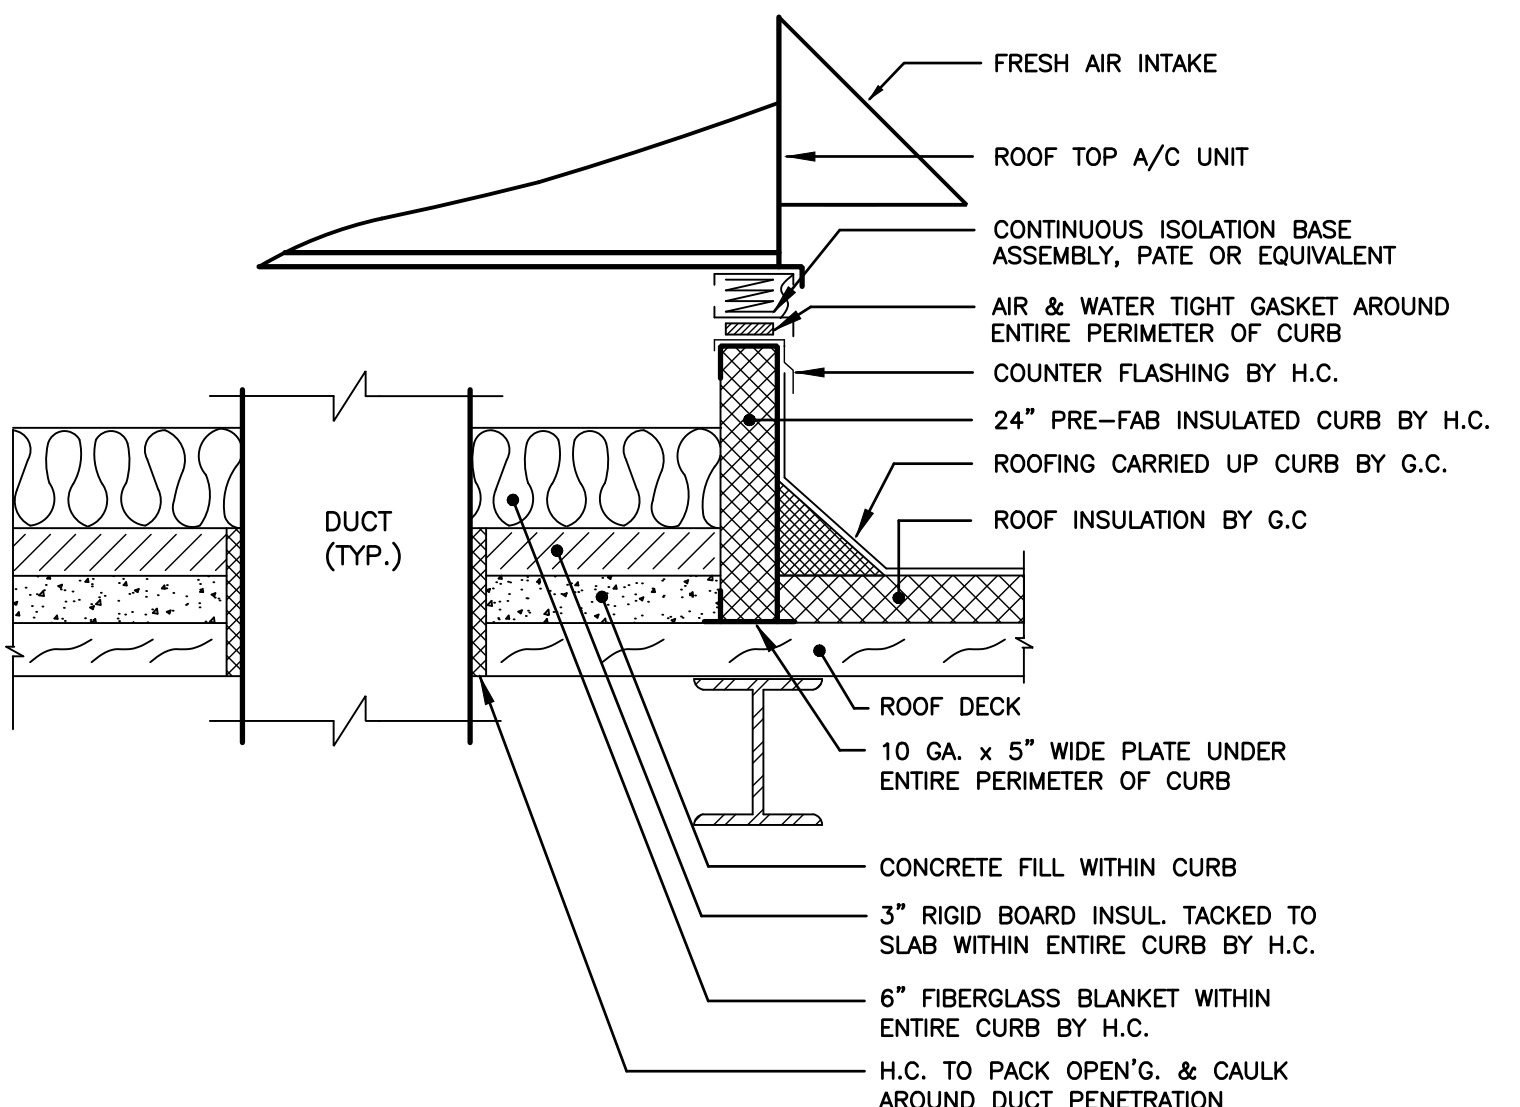


3 ROOF-TOP A/C UNIT-CURB DETAIL
H-107 NOT TO SCALE

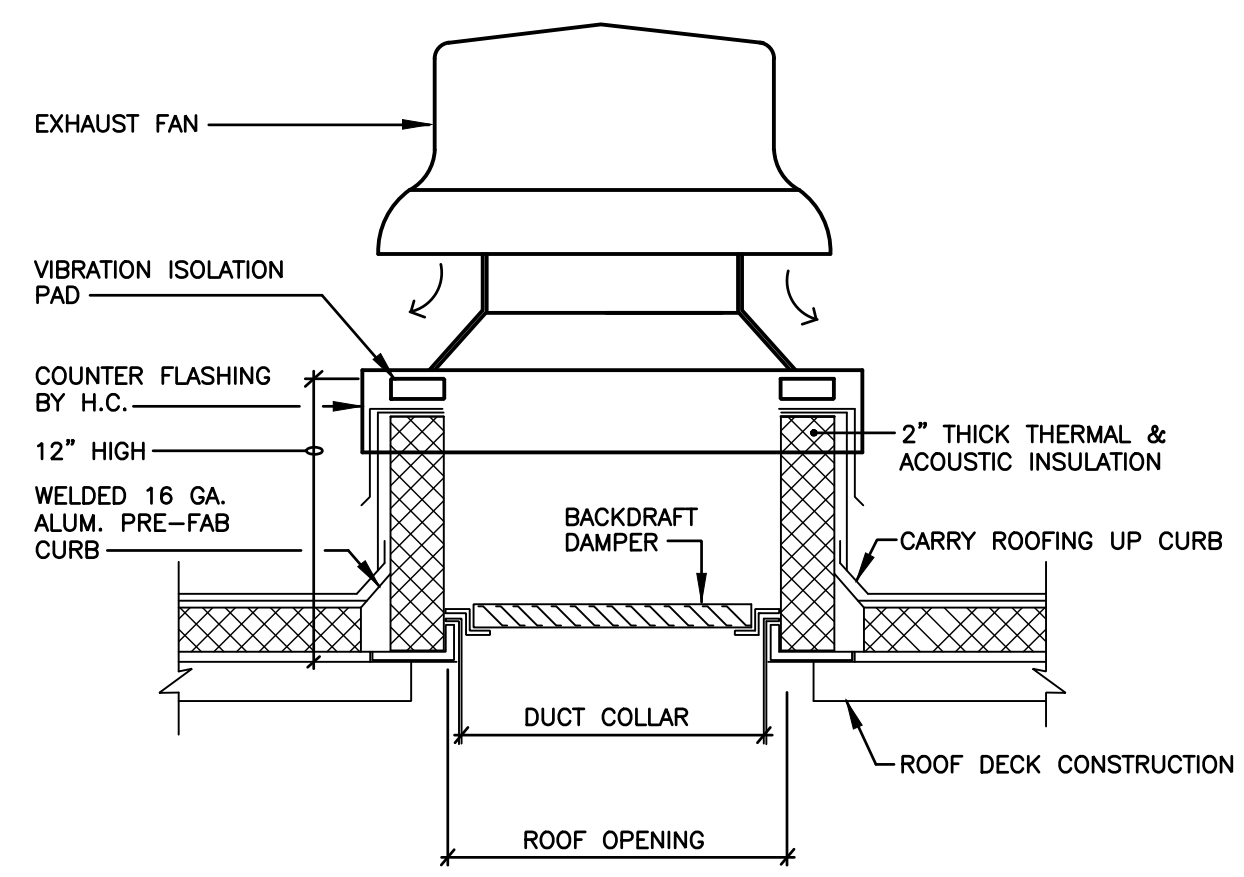

2 ROOF EXHAUST FAN DETAIL
H-107 NOT TO SCALE

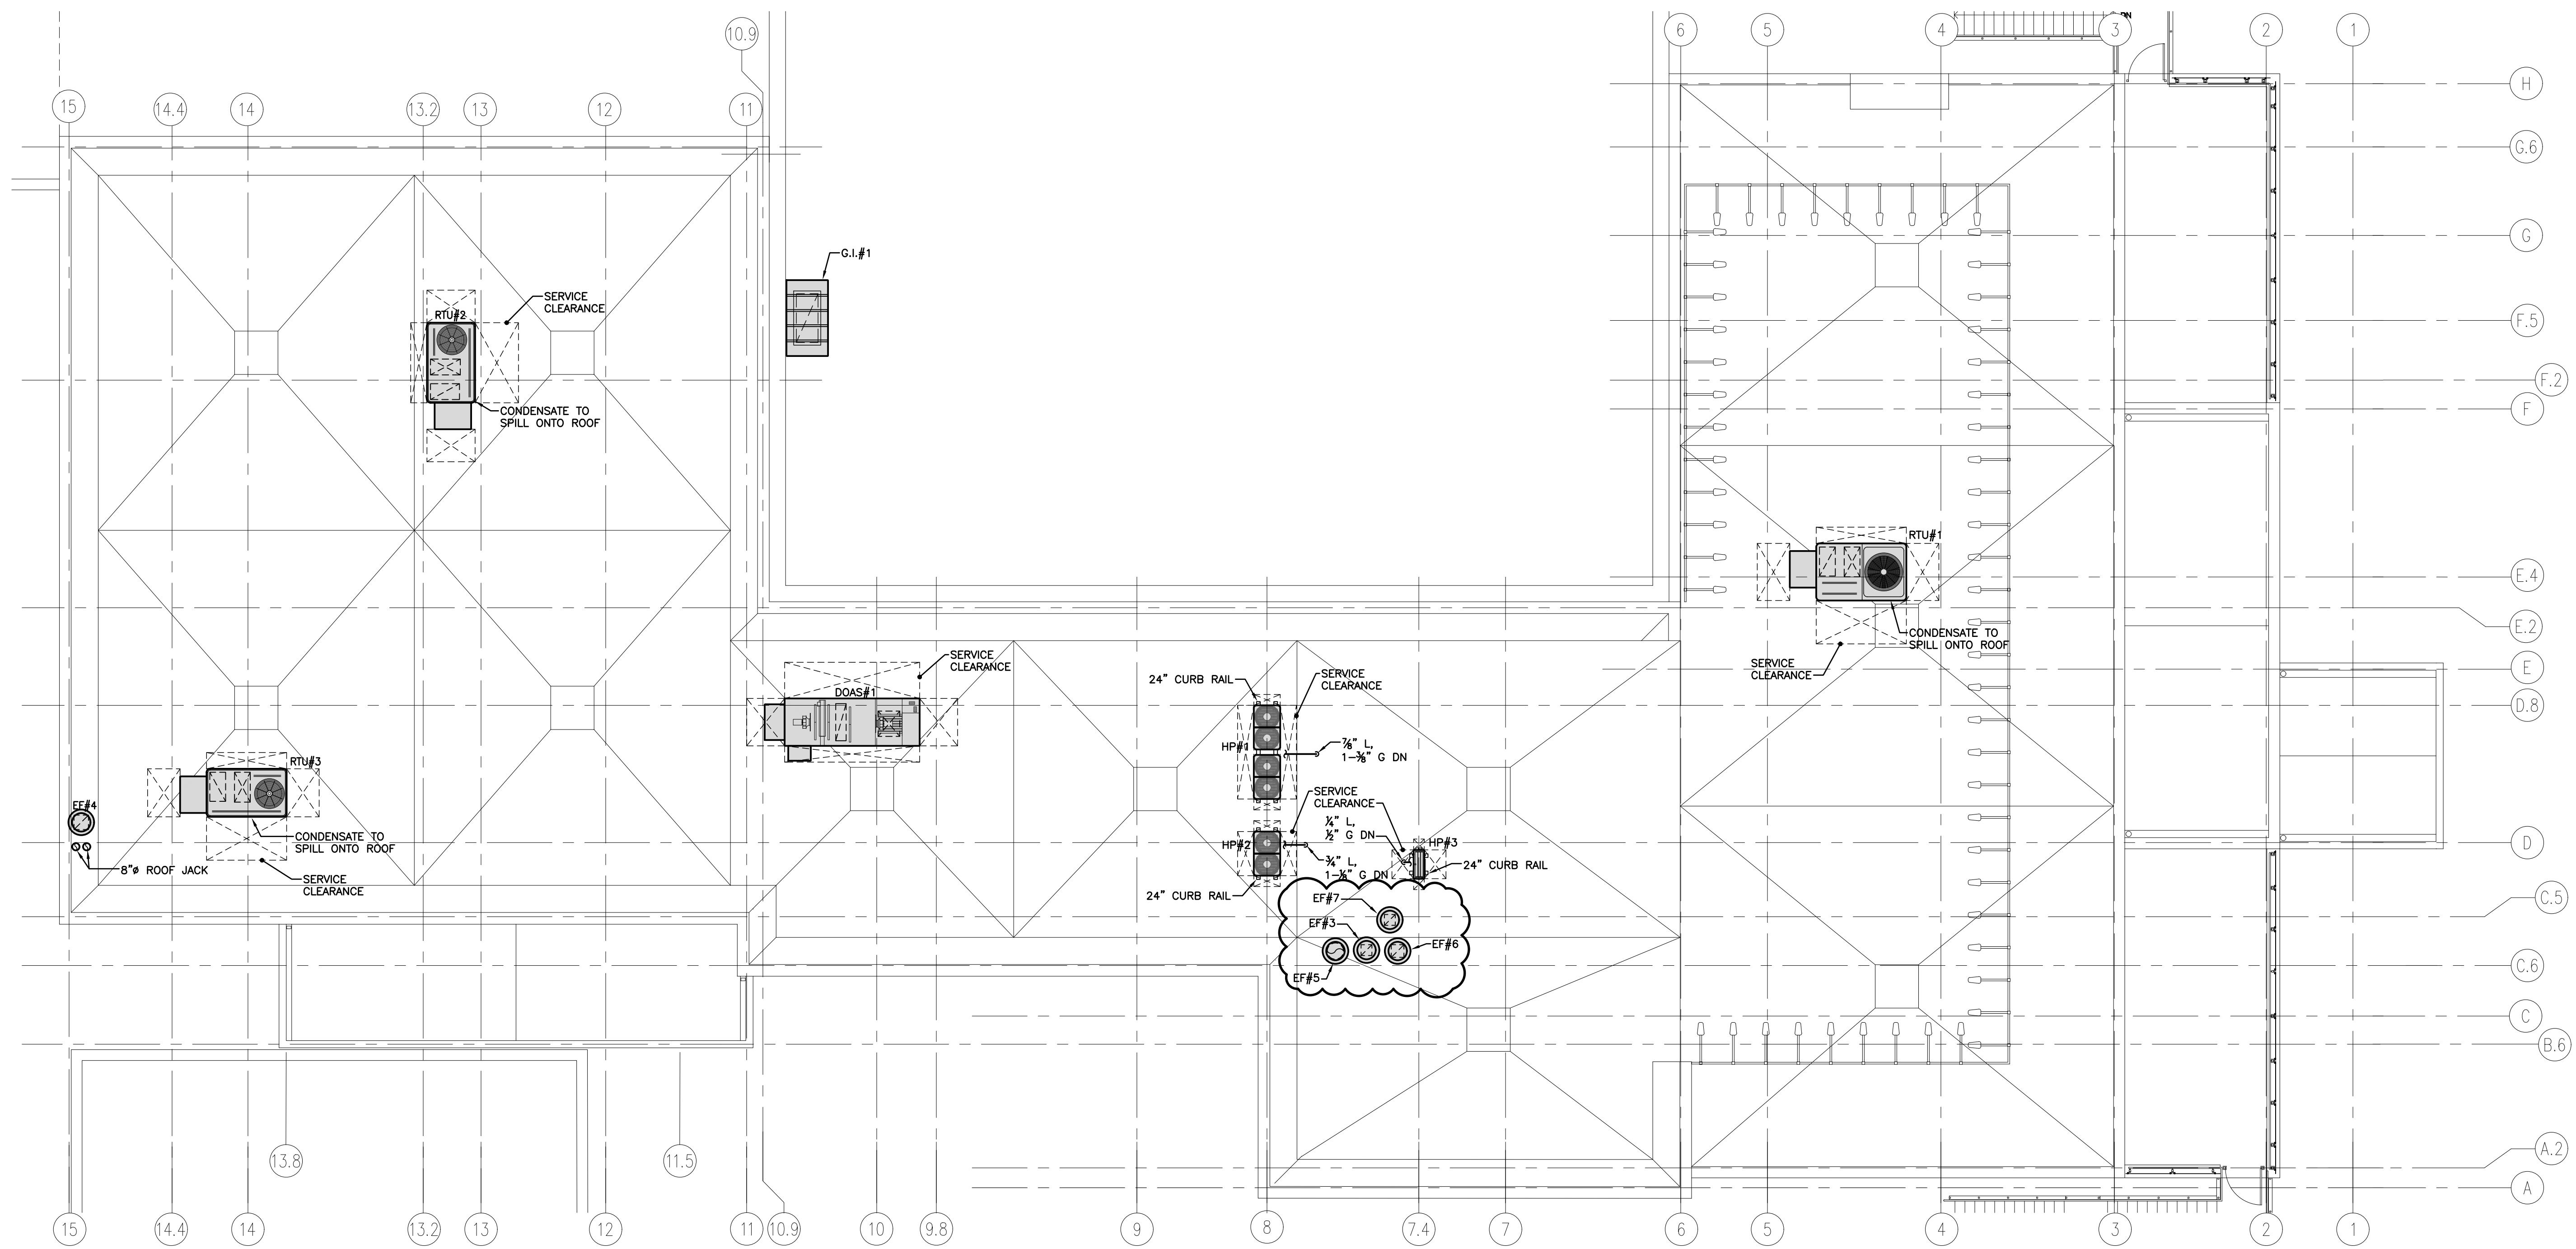

1 ROOF PLAN - PIPING
H-107 SCALE: 1/8" = 1'-0" NORTH

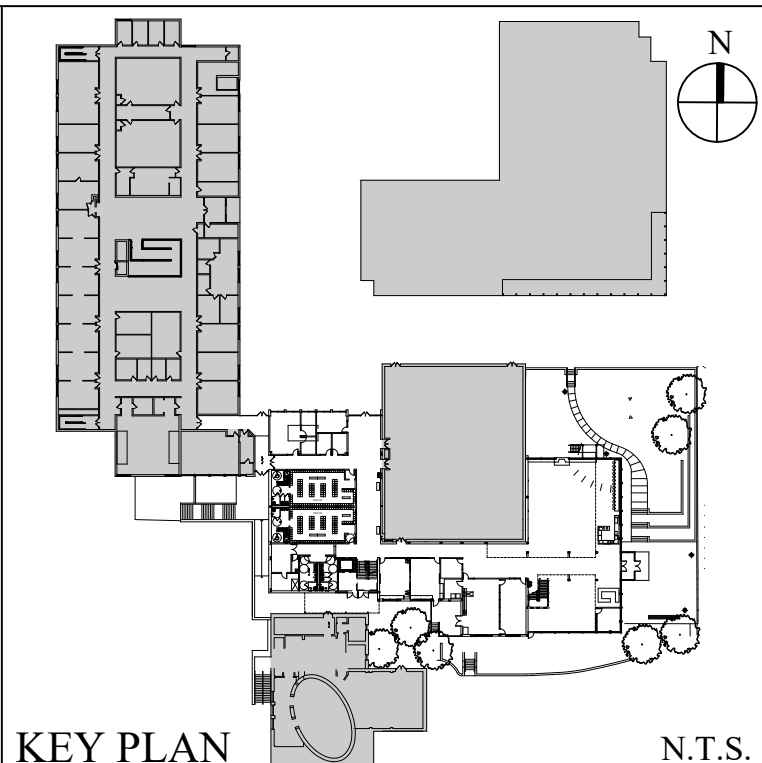

KEY PLAN N.T.S.

No.	Date	Revision
4.	06/30/2025	100% CD COMPLETE
3.	03/12/2025	50% CD COMPLETE - ADDENDUM 2
2.	02/18/2025	50% CD COMPLETE - ADDENDUM 1
1.	02/07/2025	50% CD COMPLETE - ISSUED FOR CD ESTIMATE

ARCHITECT PETER GISOLFI ASSOCIATES, LLP 566 WARBURTON AVENUE HASTINGS-ON-HUDSON, NY 10706 T: (914) 478-3677	STRUCTURAL ENGINEER DRIPILLA CONSULTING ENGINEERS 143 MAIN STREET NYACK, NY 10960 T: (845) 227-7793
MEP ENGINEERS WATSKY ENGINEERS, PLLC 68 PURCHASE STREET BYE, NY 10580 T: (914) 4967-8509	ROOFING CONSULTANT WATSKY ENGINEERS 20 MADISON AVENUE VALHALLA, NY 10595 T: (914) 948-3450
CODE CONSULTANT WILFRED GREGORY GREW, AIA 241 MAIN STREET SOUTH WOODBURY, CT 06798 T: (203) 217-1074	SPECIFICATIONS CONSTRUCTION SPECIFICATIONS INC. PO BOX 488 MORGANTVILLE, NJ 07751 T: (732) 970-0700
GEOTECHNICAL ENGINEER (BY OWNER) LANGAN CT, INC. 355 LONG WHARF DRIVE NEW HAVEN, CT 06515 (203) 962-5771	CIVIL ENGINEER (BY OWNER) REDNESS AND MEAD 22 FIRST STREET STAMFORD, CT 06905 (203) 327-0500

Project Title
**KING SCHOOL
UPPER SCHOOL
CRI/COMMONS
ADDITION PROJECT**
1450 Newfield Avenue
Stamford, CT 06905

Drawing Title
**HVAC
ROOF PLAN - PIPING**

Scale	Job No.	Date	Drawing No.
	2301.00	02/2025	H-107


Drawn	Checked	Approved
-------	---------	----------

Peter Gisolfi Associates
Architects • Landscape Architects, LLP
566 Warburton Avenue
Hastings on Hudson, NY 10706
(914) 478-3677

PETER GISOLFI ASSOCIATES LLP

PROGRESS PRINT
NOT FOR CONSTRUCTION
08/20/25

T:\North\2023\2302 KING SCHOOL-UPPER SCHOOL CRI+COMMONS ADDITION PROJECT\2302 H-108 UPPER SCHOOL-VRF SCHEMATIC.dwg, 8/20/2025 5:04:56 PM, ARCH full bleed D (36.00 x 24.00 inches), F.G.

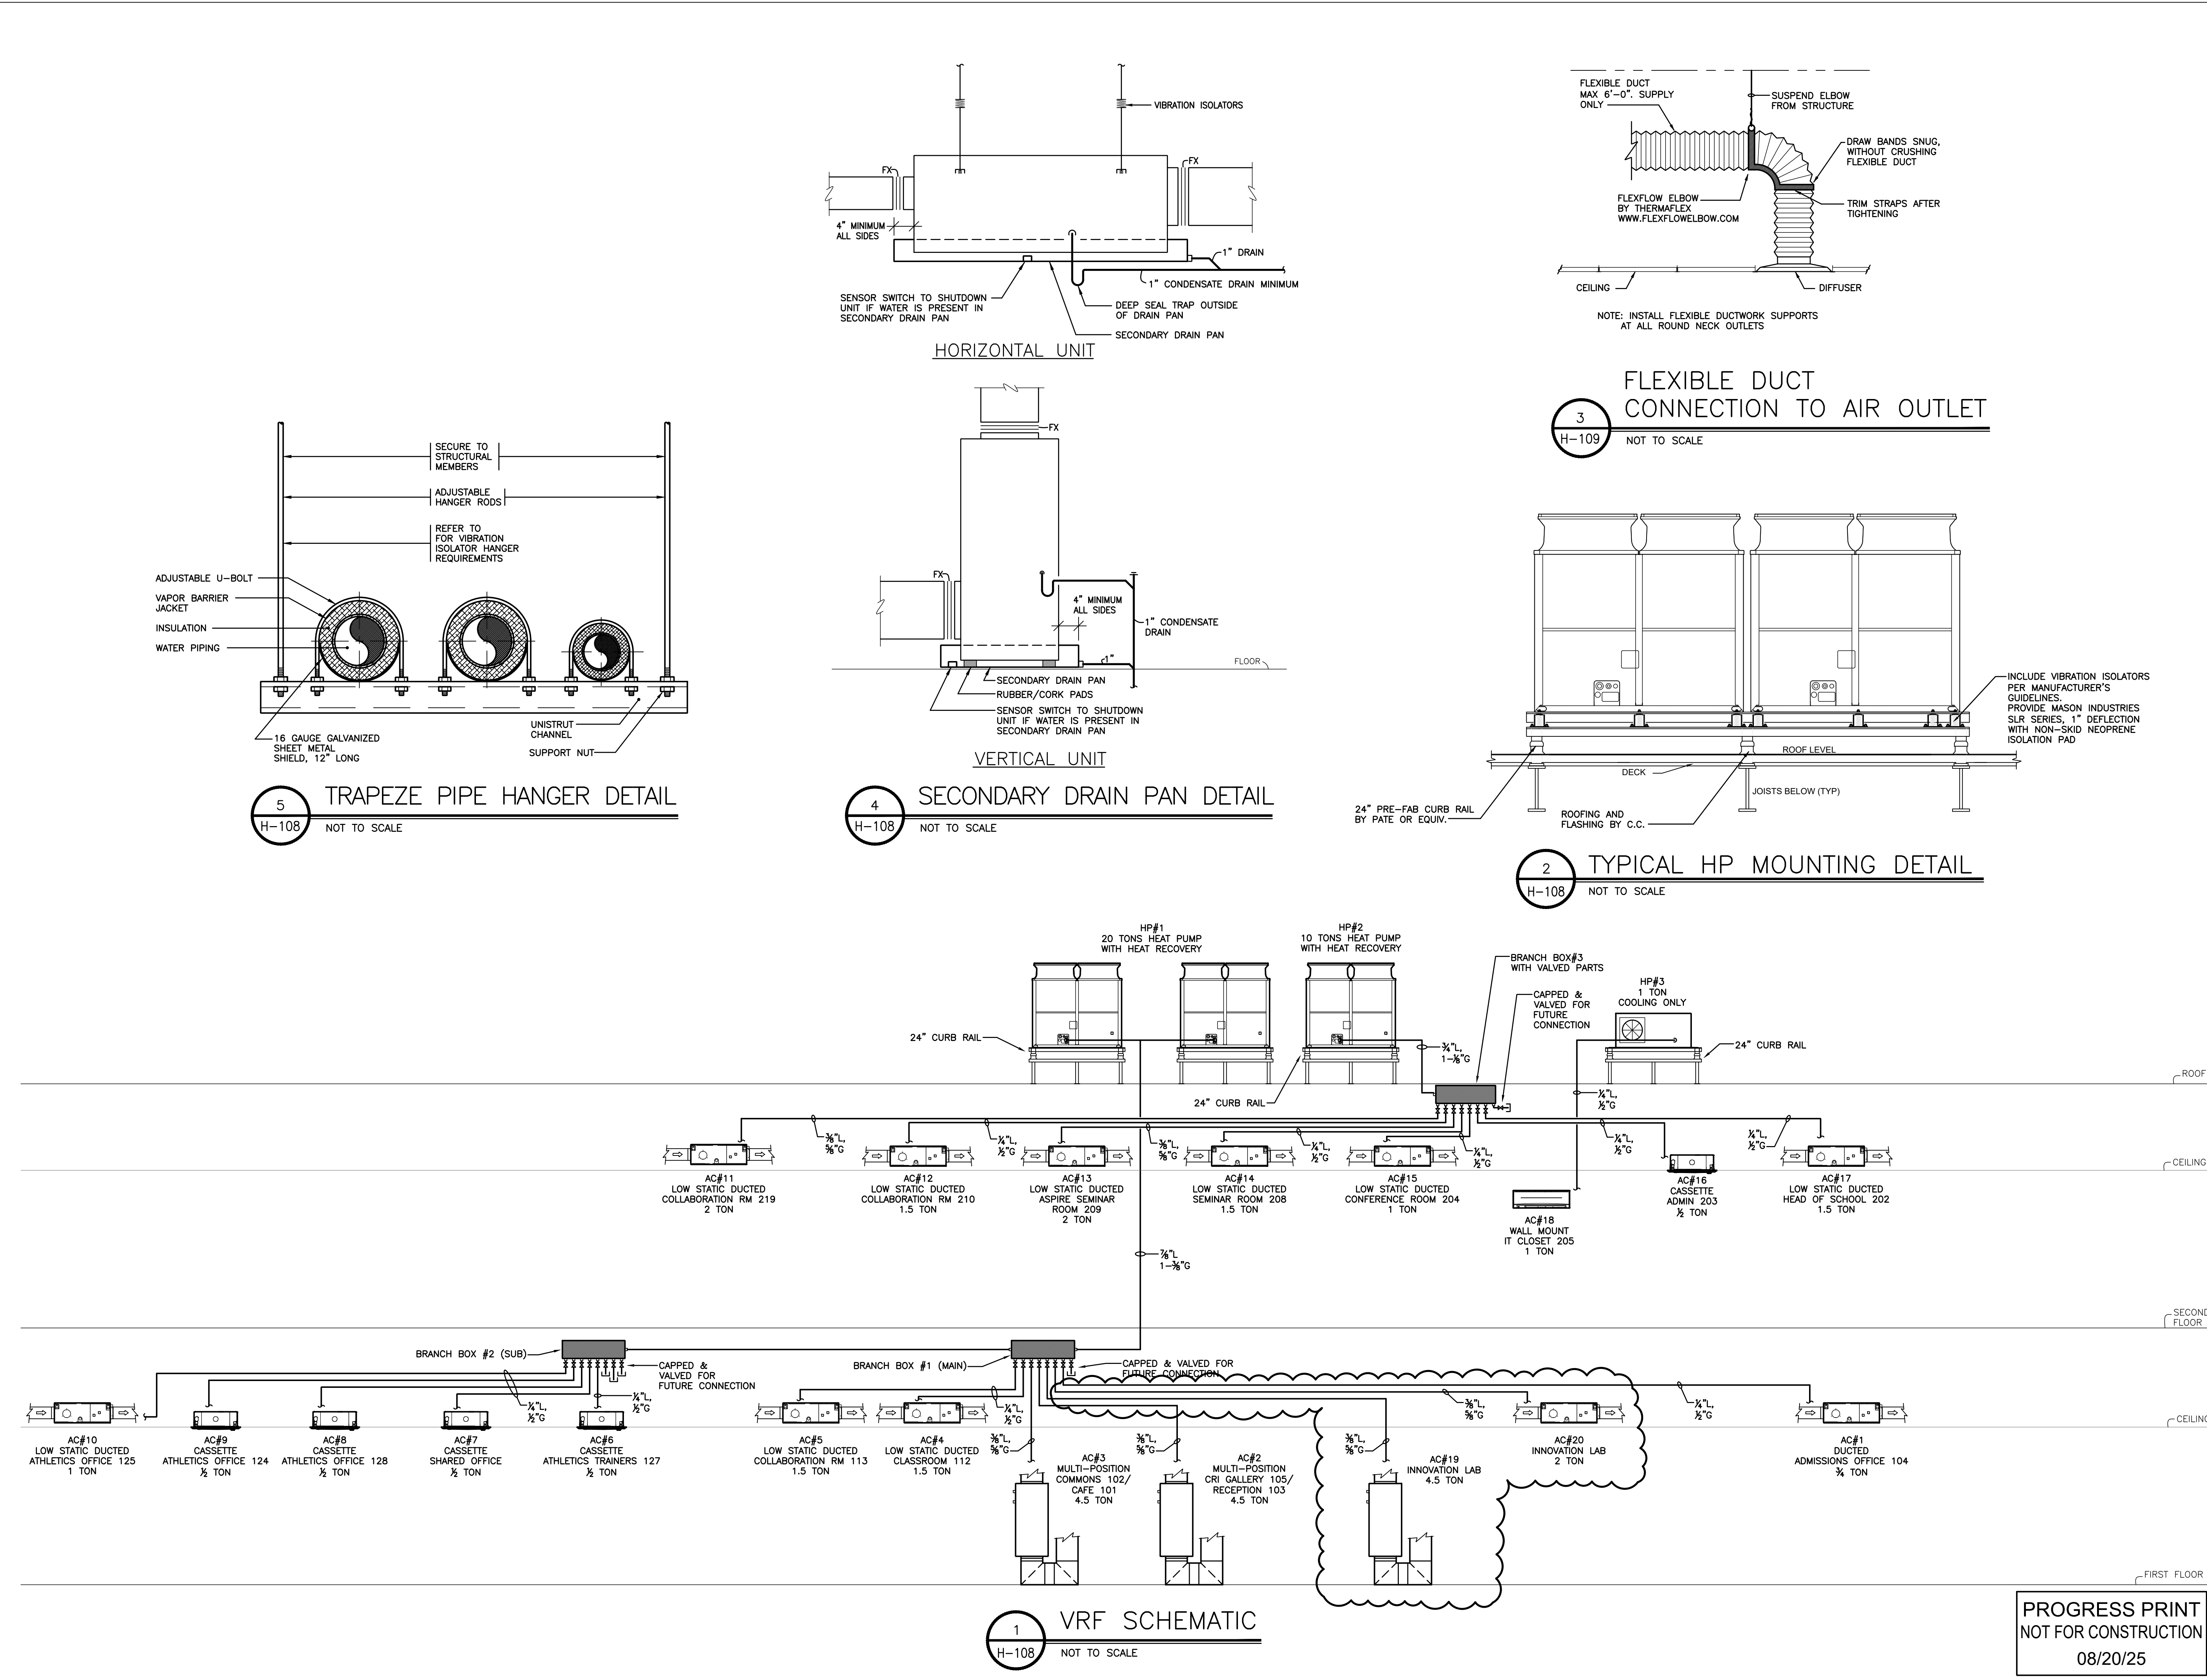

KEY PLAN N.T.S.

Revision Table:

No.	Date	Revision
5.		
4.	06/30/2025	100% CD COMPLETE
3.	03/12/2025	50% CD COMPLETE - ADDENDUM 2
2.	02/18/2025	50% CD COMPLETE - ADDENDUM 1
1.	02/07/2025	50% CD COMPLETE - ISSUED FOR CD ESTIMATE

Project Title:
KING SCHOOL
UPPER SCHOOL
CRI/Commons
ADDITION PROJECT
1450 Newfield Avenue
Stamford, CT 06905

Drawing Title:
HVAC
VRF SCHEMATIC

Scale: Job No. 2301.00 Date 02/2025 Drawing No. **H-108**

Drawn: Checked: Approved:

Architect: PETER GISOLFI ASSOCIATES, LLP
566 Warburton Avenue
Hastings-on-Hudson, NY 10706
(914) 478-3677

Structural Engineer: DRIPILA CONSULTING ENGINEERS
143 MAIN STREET
NYACK, NY 10960
T: (845) 727-7793

MEP ENGINEERS: WATSKY ASSOCIATES
68 PURCHASE STREET
BYE, NY 10580
T: (914) 498-7509

Roofing Consultant: WATSKY ASSOCIATES
20 MADISON AVENUE
VALHALLA, NY 10995
T: (914) 448-3450

Code Consultant: WILTON GREGORY GREW, AIA
241 MAIN STREET SOUTH
WOODBURY, CT 06798
T: (203) 217-1074

Geotechnical Engineer (BY OWNER): LANGAN CT, INC.
355 LONG WHARF DRIVE
NEW HAVEN, CT 06595
(203) 962-5771

Civil Engineer (BY OWNER): REDNESS AND MEAD
22 FIRST STREET
STAMFORD, CT 06905
(203) 327-0500

PETER GISOLFI ASSOCIATES, LLP

T:\North\2023\2302 KING SCHOOL UPPER SCHOOL CR1+COMMONS ADDITION PROJECT\2302 H-109 DETAILS & SCHEDULES.dwg, 8/20/2025 5:04:43 PM, ARCH full bleed D (36.00 x 24.00 inches), T & G

ROOF-TOP AIR CONDITIONING UNIT SCHEDULE																						
ROOF-TOP AC UNIT No.	MFR	MODEL	EER	CFM		S.P. EXT.	FILTERS		COOLING CAPACITY BTU/HR.		ENT. AIR °F		OUTDOOR AIR °F	HEATING CAPACITY			ELECTRICAL DATA 460V, 3ø					NOTES
				OUTSIDE	TOTAL		SIZE	TYPE	SENSIBLE	TOTAL	DB	WB		INPUT BTU/HR.	OUTPUT BTU/HR.	No. OF STEPS	COMP. RLA	EVAP. FAN FLA	COND. FAN FLA	MCA	MOP	
RTU#1	TRANE	YHK150A4SBH	10.8	1,100	5,000	0.75	2"	MERV13	109,170	144,670	80	67	95	250,000	202,500	10	14.6/6.5	5.5	2.2	33	45	
RTU#2	↓	YHK090A4SHBH	12.1	1,600	3,000	0.75	2"	MERV13	69,100	89,870	↓	↓	↓	200,000	162,000	10	8.1/5.2	4.6	1.5	22	25	
RTU#3	↓	YHK072A3SBH	12.2	1,400	2,400	0.75	2"	MERV13	57,760	78,460	↓	↓	↓	150,000	121,500	10	7/4.2	4.6	1.5	20	25	
NOTE: 1. PROVIDE LOW LEAK ECONOMIZERS, DUAL ENTHALPY ECONOMIZER CONTROL, STAINLESS STEEL HEAT EXCHANGER, MERV 13 FILTERS, POWER EXHAUST, NON FUSED DISCONNECT, RTU CONTROLS WITH BACNET INTERFACE, SINGLE ZONE VAV, 24" INSULATED CURB.																						

DEDICATED OUTSIDE AIR SYSTEM UNIT SCHEDULE																		
DOAS UNIT No.	MFR.	MODEL	AIR FLOW CFM		EXT SP.	FILTER DATA			EFFECTIVENESS HEATING/COOLING(%)	HEATING CAPACITY (GAS)				ELECTRICAL DATA 460V, 3ø			WEIGHT (LBS)	NOTES
			OUTSIDE	TOTAL		No.	SIZE	TYPE		INPUT (BTU/HR)	OUTPUT (BTU/HR)	TEMP RISE °F	No OF STEPS	FLA	MCA	MOP		
DOAS#1	GREENHECK	RVE-40-36D-0-C-A1	3,000	3,000	0.75	2	20"x25"x2"	MERV8	60/62	100,000	81,000	25	16	9.4	11.8	15	2,460	
NOTES: 1. PROVIDE UNIT WITH DIRECT DRIVE FAN WITH VFD, DOUBLE WALL CONSTRUCTION, SS HEAT EXCHANGER, INTEGRATE WITH HOOD CONTROLS. TIE INTO EXISTING BMS.																		

VRF INDOOR HEAT PUMP UNIT SCHEDULE															
AC#	MFR.	MODEL	SIZE (MBH)	HEAT PUMP	UNIT TYPE	CAPACITY (BTU/H)		CFM (HIGH)	REFRIG. PIPING LIQUID/GAS	SIZE (WxDxH)	WEIGHT (LBS)	ELECTRICAL			NOTES
						COOLING (90°F)	HEATING (10°F)					VOLTAGE/ϕ	MCA	MOCP	
AC#1	TRANE	TPEFY008MS140C	08	HP#1	LOW STATIC DUCTED	6,650	7,412	317	1/4 / 1/2	31-1/8"x27-9/16"x7-7/8"	42	208/1ϕ	0.47	15	
AC#2		TPVFP054AM141A	54		MULTIPOSITION	46,035	49,972	1,485	3/8 / 5/8	25"x21-5/8"x59-1/2"	172		5.63	15	
AC#3		TPVFP054AM141A	54		MULTIPOSITION	46,035	49,972	1,485	3/8 / 5/8	↓	↓		↓	↓	
AC#4		TPEFY018MS140C	18		LOW STATIC DUCTED	15,430	16,740	529	1/4 / 1/2	39"x27-9/16"x7-7/8"	54		0.88	15	
AC#5		TPEFY018MS140C	18		LOW STATIC DUCTED	15,430	16,740	529	1/4 / 1/2	↓	↓		↓	↓	
AC#6		TPLFP005FM140A	05		CASSETTE	4,263	4,664	280	1/4 / 1/2	22-7/16"x22-7/16"x8-3/16"	29		0.24	15	
AC#7		TPLFP005FM140A	05		CASSETTE	4,263	4,664	280	1/4 / 1/2	22-7/16"x22-7/16"x8-3/16"	29		0.24	15	
AC#8		TPLFP005FM140A	05		CASSETTE	4,263	4,664	280	1/4 / 1/2	22-7/16"x22-7/16"x8-3/16"	29		0.24	15	
AC#9		TPLFP005FM140A	05		CASSETTE	4,263	4,664	280	1/4 / 1/2	22-7/16"x22-7/16"x8-3/16"	29		0.24	15	
AC#10		TPEFY012MS140C	12	↓	LOW STATIC DUCTED	10,145	11,327	370	1/4 / 1/2	31-1/8"x27-9/16"x7-7/8"	46		0.67	15	
AC#11		TPEFY024MS140C	24	HP#2	LOW STATIC DUCTED	22,383	26,043	706	3/8 / 5/8	46-7/8"x27-9/16"x7-7/8"	62		1.17	15	
AC#12		TPEFY018MS140C	18		LOW STATIC DUCTED	16,951	19,388	529	1/4 / 1/2	39"x27-9/16"x7-7/8"	54		0.88	15	
AC#13		TPEFY024MS140C	24		LOW STATIC DUCTED	22,383	26,043	706	3/8 / 5/8	46-7/8"x27-9/16"x7-7/8"	62		1.17	15	
AC#14		TPEFY018MS140C	18		LOW STATIC DUCTED	16,951	19,388	529	1/4 / 1/2	39"x27-9/16"x7-7/8"	54		0.88	15	
AC#15		TPEFY012MS140C	12		LOW STATIC DUCTED	11,145	13,118	370	1/4 / 1/2	31-1/8"x27-9/16"x7-7/8"	46		0.67	15	
AC#16		TPLFP005FM140A	05		CASSETTE	4,683	5,402	280	1/4 / 1/2	22-7/16"x22-7/16"x8-3/16"	29		0.24	15	
AC#17		TPEFY018MS140C	18		LOW STATIC DUCTED	16,951	19,388	529	1/4 / 1/2	39"x27-9/16"x7-7/8"	54		0.88	15	
AC#18		TPKADA012LHA70A	12	↓	WALL MOUNT	12,000	-	425	1/4 / 1/2	35-3/8"x9-13/16"x11-5/8"	29		↓		UNIT POWERED BY OUTDOOR UNIT, PROVIDE CONDENSATE PUMP.
AC#19		TPVFP054AM141A	54	HP#1	MULTIPOSITION	46,035	1,485		3/8 / 5/8	25"x21-5/8"x59-1/2"	172		5.63		INNOVATION LAB
AC#20	↓	TPEFY024MS140C	24	HP#1	LOW STATIC DUCTED	22,383	706		3/8 / 5/8	46-7/8"x27-9/16"x7-7/8"	62	↓	1.17		↓
NOTE: PROVIDE SIMPLE MA THERMOSTAT. TIE ALL UNITS TO BMS.															

VRF OUTDOOR HEAT PUMP UNIT SCHEDULE														
HP#	MFR.	MODEL	CAPACITY (BTU/H)		EER	COP @10°F	REFRIG. PIPING LIQUID/GAS	SIZE (WxDxH)	WEIGHT (LBS)	ELECTRICAL				NOTES
			COOLING (90°F)	HEATING (10°F)						VOLTAGE/ø	MCA	RFS	MOCP	
HP#1	TRANE	TURYH240BN41AN	233,200	259,800	9.85	1.96	7/8 / 1-3/8	(2) 49-1/4"x29-3/8"x71-5/8"	(2) 697	460/3ø	(2) 35	(2) 35	(2) 50	NOTE 1
HP#2	↓	TURYH096AN41AN	111,450	128,800	11.8	2.2	3/4 / 1-1/8	49-1/4"x29-3/8"x71-5/8"	697	↓	30	30	50	↓
HP#3	↓	TRUYA0121KA70NA	12,000	—	12.0	—	1/2 / 1/2	31-13/16"x11-13/16"x24-13/16"	92	208/1ø	11	—	25	COOLING ONLY, NOTE 2
NOTE: 1. PROVIDE 10 YEAR EXTENDED WARRANTY, DIGITAL CENTRAL CONTROLLER, TIE TO EXISTING BMS, PANEL HEATER KIT, SNOW/HAIL GUARD KIT. 2. PROVIDE LOW AMBIENT CONTROL.														

VRF HEAT RECOVERY BRANCH UNIT SCHEDULE											
UNIT#	MFR.	MODEL	OUTDOOR UNIT	UNIT TYPE	No. OF PORTS	CONNECTED CAPACITY (BTU)	LOCATION	ELECTRICAL			NOTES
								VOLTAGE/ø	MCA	MOCP	
BB#1	TRANE	TCBMO108JA11N4BV	HP#1	MAIN BRACH BOX	8	202,900	STORAGE/IT/MECH 109	208/1ø	0.8	20	106
BB#2		TCMBS0108KB11N4BV	HP#1	SUB BRANCH BOX	8	29,300	STORAGE 129	208/1ø	0.7	20	69
BB#3	↓	TCMBG0108SJ11N4BV	HP#2	MAIN BRANCH BOX	8	111,450	IT CLOS 205	208/1ø	0.7	20	64
NOTE: ALL PORTS TO HAVE VALVED CONNECTIONS.											

ELECTRIC HEATER SCHEDULE								
ELECTRC HEATER No.	MFR.	MODEL No.	TYPE	LENGTH	WATTS	VOLTS / PHASE	BTU/HR.	NOTES
EW#1#1-#2	QMARK	AWH4404	RECESSED WALL HEATER	15-3/4"	3KW	208/1ø	10,236	LINE VOLTAGE THERMOSTAT
NOTE: 1. PROVIDE LINE VOLTAGE THERMOSTAT, DISCONNECT SWITCH, SURFACE MOUNT FRAME, FINISH AS PER ARCHITECT.								

PANEL RADIATION SCHEDULE							
PANEL RADIATION No.	MANUFACTURER	MODEL	CAPACITY BTU / HR	LENGTH OF ELEMENTS	HEIGHT / # OF ELEMENTS	PIPING CONNECTIONS	NOTES
PR#1	RUNTAL	RF-3	6,750	(2) 5'-6"	8.6 / 3	3/4"	0.68
PR#2	↓	↓	2,760	4'-6"	↓	↓	0.28
NOTE: — HC SHALL VERIFY QUANTITIES AND LENGTH OF TRIM PIECES. — HC SHALL CONFIRM PIPING CONNECTIONS WITH FINAL PIPING LAYOUT. — COLOR OF RADIATION SHALL BE AS SELECTED BY ARCHITECT.							

CABINET HEATER SCHEDULE							
CAB. HTR. No.	MFR.	MODEL No.	ARGMT.	C.F.M.	WATTS	VOLTS/ PHASE	NOTES
CH#1	QMARK	CU945	HORIZONTAL DUCTED	500	4,000	208/1ø	13,652
NOTE: PROVIDE CEILING RECESS TRIM KIT, DUCT COLLARS, LINE VOLTAGE THERMOSTAT, AND DISCONNECT.							

SUPPLY REGISTER SCHEDULE					
SUPPLY REG. No.	MFR.	MODEL	CFM	SIZE	NOTES
SR#1-6	PRICE	RGG	150	36X4	
SR#7-8	↓	↓	125	↓	
SR#9	↓	↓	100	12X4	
NOTE: EXTRUDED ALUMINUM, REVERSIBLE CORE SIDE WALL SUPPLY REGISTER WITH ALUMINUM DAMPER, 1" FLAT BORDER AND DIRECTIONAL VANES. PROVIDE ANODIZED FINISH, COLOR BY ARCHITECT.					

EXHAUST FAN SCHEDULE									
EXHAUST FAN No.	MFR.	MODEL	C.F.M.	S.P.	H.P.	WALL OR BASE OPG.	CURB TYPE	CONTROLS	NOTES
EF#1	TJERNLUND	CDB8	220	0.5	1/2	—	—	INTERLOCK WITH DRYER, PROVIDE INLINE ELBOW KIT	NOTE 1
EF#2	↓	↓	↓	↓	↓	—	—	↓	↓
EF#3	LOREN COOK	135C17D OR92	650	1.5	1/2	15-1/2"x15-1/2"	ALUMINUM	INTERLOCK WITH LASER CUTTER	NOTE 2, 3
EF#4		135C13D	1,500	0.5	1/4	15-1/2"x15-1/2"	ALUMINUM	TIME CLOCK	NOTE 3
EF#5		135C17DEC	1,900		3/4	—	ALUMINUM	INTERLOCK WITH SPRAYBOOTH	NOTE 2, 3
EF#6		120C17DEC	1,200		1/2	—	ALUMINUM	INNOVATION LAB 3-SPEED FAN CONTROL	NOTE 2, 3
EF#7		↓	800		1/2	—	ALUMINUM	SOLDERING STATION 1 HOUR TIMER	NOTE 2, 3
NOTE: 1. PROVIDE CONSTANT SPEED UNIT, PROVIDE CONTROLS AND VFD. 2. PROVIDE ADJUSTABLE SPEED CONTROL AT FAN FOR BALANCING. 3. PROVIDE BACK DRAFT DAMPER.									

GRAVITY VENTILATION SCHEDULE										
GRAVITY VENT. NO.	MFR.	MODEL	DIMENSIONS					CURB		NOTES
			THROAT WIDTH (IN)	THROAT LENGTH (IN)	HOOD WIDTH (IN)	HOOD LENGTH (IN)	HOOD LENGTH (IN)	MFR.	MODEL	
G.I.#1	GREENHECK	FGI-24x54	24	54	46	84	19	GREENHECK	GPI-30x60-G24	PROVIDE 24" INSULATED CURB & MOTORIZED DAMPER
NOTE:										

SLOT DIFFUSER SCHEDULE								
SLOT DIFF No.	MFR.	MODEL	CFM.	SIZE	INLET SIZE	SLOTS	THROW	NOTES
LD#1-2	PRICE	55210	250	5'	10"	1	12"	
LD#3-14			150	5'	8"		12"	
LD#15-18			100	2'	8"		10"	
LD#19-21			50	2'	8"		8"	
LD#22			200	5'	10"		12"	
LD#23-24			50	2'	8"		10"	
LD#25-30			100	2'	8"		10"	
LD#31			100	5'	8"		10"	
LD#32-34	↴	↴	50	2'	8"	↴	8"	
NOTE: LINEAR DIFFUSER TO HAVE ENGINEERED PLENUM, CABLE BUTTERFLY DAMPERS. PROVIDE ANODIZED FINISH, COLOR BY ARCHITECT.								

UNIT POWERED BY OUTDOOR UNIT,
PROVIDE CONDENSATE PUMP.

INNOVATION LAB

↓

1. CONTRACTOR SHALL PROVIDE OF THE SERVICES THE SCHOOL'S LICENSED FIRE ALARM VENDOR IN BID.
2. NEW FIRE ALARM EQUIPMENT SHALL INCLUDE BUT NOT BE LIMITED TO;
 - PROVIDE NEW FIRE ALARM PANEL
 - ALL REQUIRED AND INDICATED ALARM INITIATING AND NOTIFICATION DEVICES.
 - ALL COMPLIANT STROBES AND SPEAKER/STROBES WITH SYNC MODULES.
 - ADDRESSABLE SMOKE DETECTOR
 - CONVENTIONAL FIXED TEMP, 135°F HEAT DETECTORS.
 - ADDRESSABLE CARBON MONOXIDE DETECTORS.
 - CONVENTIONAL NON-ADDRESSABLE HEAT DETECTORS
 - MANUAL PULL STATIONS
 - ADDRESSABLE INTERFACE MODULES
 - AUDIO AMPLIFIERS
3. ALL WIRES SHALL BE PLENUM RATED FIRE ALARM CABLES. ALL WIRES SHALL BE RUN AS RATED ON RISER
4. SEE FLOOR PLANS FOR EXACT QUANTITY AND LOCATION.
5. PROVIDE SHOP DRAWINGS, SHOP DRAWING SUBMITTALS SHALL INCLUDE;
 - FULL FLOOR PLANS WITH DEVICE LOCATIONS AND ADDRESSES.
 - SYSTEM RISER AND CONNECTION PLANS.
 - DEVICE CUTS.
 - TEST REPORT.
6. TEST REPORT SHALL INCLUDE TESTING OF ALL DEVICES AND FULL SEQUENCE OF OPERATION. DOCUMENTATION SHALL INCLUDE ALL STEPS AND ALL DEVICES TESTED.

NOTE
- IT IS NOT THE INTENT OF THIS PROJECT TO ALTER THE EXISTING SEQUENCE OF OPERATION, EXCEPT
ACTIVATION OF SMOKE DETECTOR IN IMMEDIATE VICINITY OF MAGNETICALLY HELD DOOR SHALL RELEASE HOLDER.


SYMBOL	DESCRIPTION &/OR SPECIFICATION
	EXIT LIGHTS WITH OUTLETS- BACK MTD, CEILING & DIRECTIONAL TYPE
	COMBINATION EXIT/EMERGENCY LIGHT FIXTURE
	SINGLE POLE 20A, TOGGLE SWITCH, DECORA STYLE
	THREE-WAY 20A, TOGGLE SWITCH, DECORA STYLE
	MOTION SENSOR SWITCH, SENSOR SWITCH BRAND WSD-POT-2P-COLOR
	LIGHTING CONTROL OVERRIDE SWITCH
	CONDUIT RUN CONCEALED IN CEILINGS &/OR HUNG CEILING &/OR WALLS
	WIREMOLD
	POWER DISTR. PANEL, LIGHTING PANEL, & RECEPTACLE PANEL
	PULL STATION TO MATCH EXISTING FIRE ALARM SYSTEM
	SPEAKER/STROBE TO MATCH EXISTING VOICE FIRE ALARM SYSTEM
	FIRE ALARM SIGNAL VISUAL ONLY TYPE
	EDWARD SIGNAL CALL FOR AID SWITCH AND SWITCH KIT. # 6538-GS
	CARBON MONOXIDE DETECTOR
	HEAT DETECTOR 135°F FIXED TEMP.
	CEILING SMOKE DETECTOR PHOTO ELECTRIC TYPE
	DUCT SMOKE DETECTOR
	DUPLEX RECEPTACLE, 20A, 125V, CHLD TAMPER RESISTANT, LEVITON # TS825-COLOR
	COMBO 120V/USB/USB-C TAMPER RESISTANT CHARGING RECEPTACLE, LEVITON TS833-W
	SPECIAL PURPOSE, 250V RECEPTACLE
	GROUND FAULT RECEPTACLE UNIT-CHLD TAMPER RESISTANT LEVITON # GFWT2-65362-WT-COLOR
	JUNCTION BOX E.C. TO MAKE ALL REQUIRED CONN. TO DESIGNATED EQUIPMENT
	FUSED DISCONNECT SWITCH- SIZE NOT INTENDED USE. UNFUSE WHERE NOT REQUIRED ALL RUL TYPE EXCEPT USE
	MOTOR- NUMBER DENOTES HORSEPOWER
	THERMOSTAT
	MOTOR OPERATED DAMPER / MOTOR OPERATED VALVE
	DATA OUTLET BACKBOX, RACEWAY, CABLE HOMERUN TO DATA IT
	TEL OUTLET BACKBOX, RACEWAY, CABLE HOMERUN TO DATA IT
	OCCUPANCY/VACANCY SENSOR, SEE LIGHTING CONTROL CHART.
	EXISTING
	EXISTING TO BE REMOVED
	FIRE ALARM ADDRESSABLE CONTROL MODULE
	FIRE ALARM KEY ENTRY BOX
	FIRE ALARM SPRINKLER SYSTEM TAMPER SWITCH
	FIRE ALARM SPRINKLER SYSTEM PRESSURE SWITCH
	FIRE ALARM SPRINKLER SYSTEM WATER FLOW SWITCH
	SECURITY DOOR CONTROL CARD READER
	SECURITY DOOR CONTROL DOOR STATUS CONTACT
	SECURITY DOOR CONTROL ELECTRIC STRIKE
	SECURITY DOOR CONTROL MAGNETIC DOOR LOCK
	TWO HEAD EM BALL PACK EMERGENCY LIGHT FIXTURE
	REMOTE EM HEAD POWER FROM EM
	BEAM TYPE SMOKE DETECTOR
	EDGEKIT EXIT SIGN
	FIRE DEPARTMENT KEY ENTRY BOX
	SURFACE OR RECESSED MOUTH SPEAKER TO MATCH EXISTING PA SYSTEM
	FIRE ALARM HOLD OPEN/DOOR RELEASE
	DENOTES CONTROLLED RECEPTACLE, SEE LIGHTING CONTROL DETAIL
	LIGHTING CONTROL HUB / TRANSMITTER CONTROL

E.C.	ELECTRICAL CONTRACTOR	HD	HEAVY DUTY
H.C.	HEATING CONTRACTOR	CU	COPPER
P.C.	PLUMBING SUB CONTRACTOR	WP	WEATHER PROOF
G.C.	GENERAL CONTRACTOR	G., GND	GROUND
E.F.	EXHAUST FAN	CB	CIRCUIT BREAKER
P.P.P.P.P.	LIGHTING PANEL/POWER PANEL/RECEPTAL PANEL	GF	GROUND FAULT
C.O.	CONDUIT ONLY	DISC.	DISCONNECT
A.F.F.	ABOVE FINISHED FLOOR	FACP	FIRE ALARM CONTROL PANEL
N.T.S.	NOT TO SCALE	MD	MOTORIZED DAMPER
NEC	NATIONAL ELECTRIC CODE (LATEST)	MV	MOTORIZED VALVE
S/N	SOLID NEUTRAL	CO	CARBON MONOXIDE
E	EXISTING TO REMAIN	CLG	CEILING MOUNTED
R	REMOVE EXISTING	EM/INV	WITH INVERTER BACKUP
CC	CLEAR COVER	WM	WIREWELD



PROVIDE LIGHTING CONTROL SYSTEM WITH THE FOLLOWING:

- VACANCY/OCCUPANCY SENSORS.
- MANUAL SCENE SELECTOR WITH DIMMING.
- DAYLIGHT DIMMING.
- TIME OF DAY OVERRIDE.
- OWNER PROGRAMMABLE SYSTEM AND MODIFICATIONS.

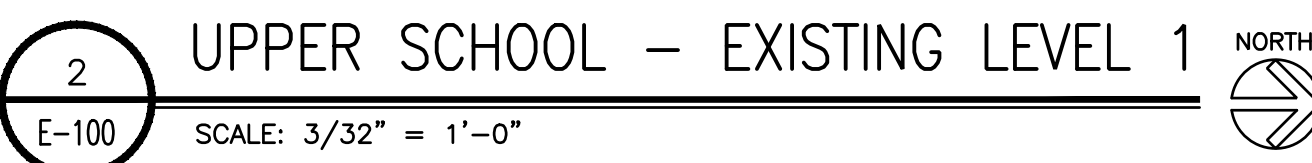


KEY PLAN




N.T.S.

Job No.	Date	Drawing No.
2301.00	02/2025	
Checked	Approved	E-100
Peter Gisolfi Associates Architects + Landscape Architects, LLP 16 Warburton Avenue Hastings-on-Hudson, NY 10706 (414) 478-3677		
P E T E R G I S O L F I A S S O C I A T E S L L P		


T:\North\2023\2302 KING SCHOOL UPPER SCHOOL CR1/COMMONS ADDITION PROJECT\2302 E-102 UPPER SCHOOL-FIRST FLOOR PLAN-POWER.dwg, 8/20/2025 5:06:19 PM, ARCH full bleed D (36.00 x 24.00 inches), F.G.

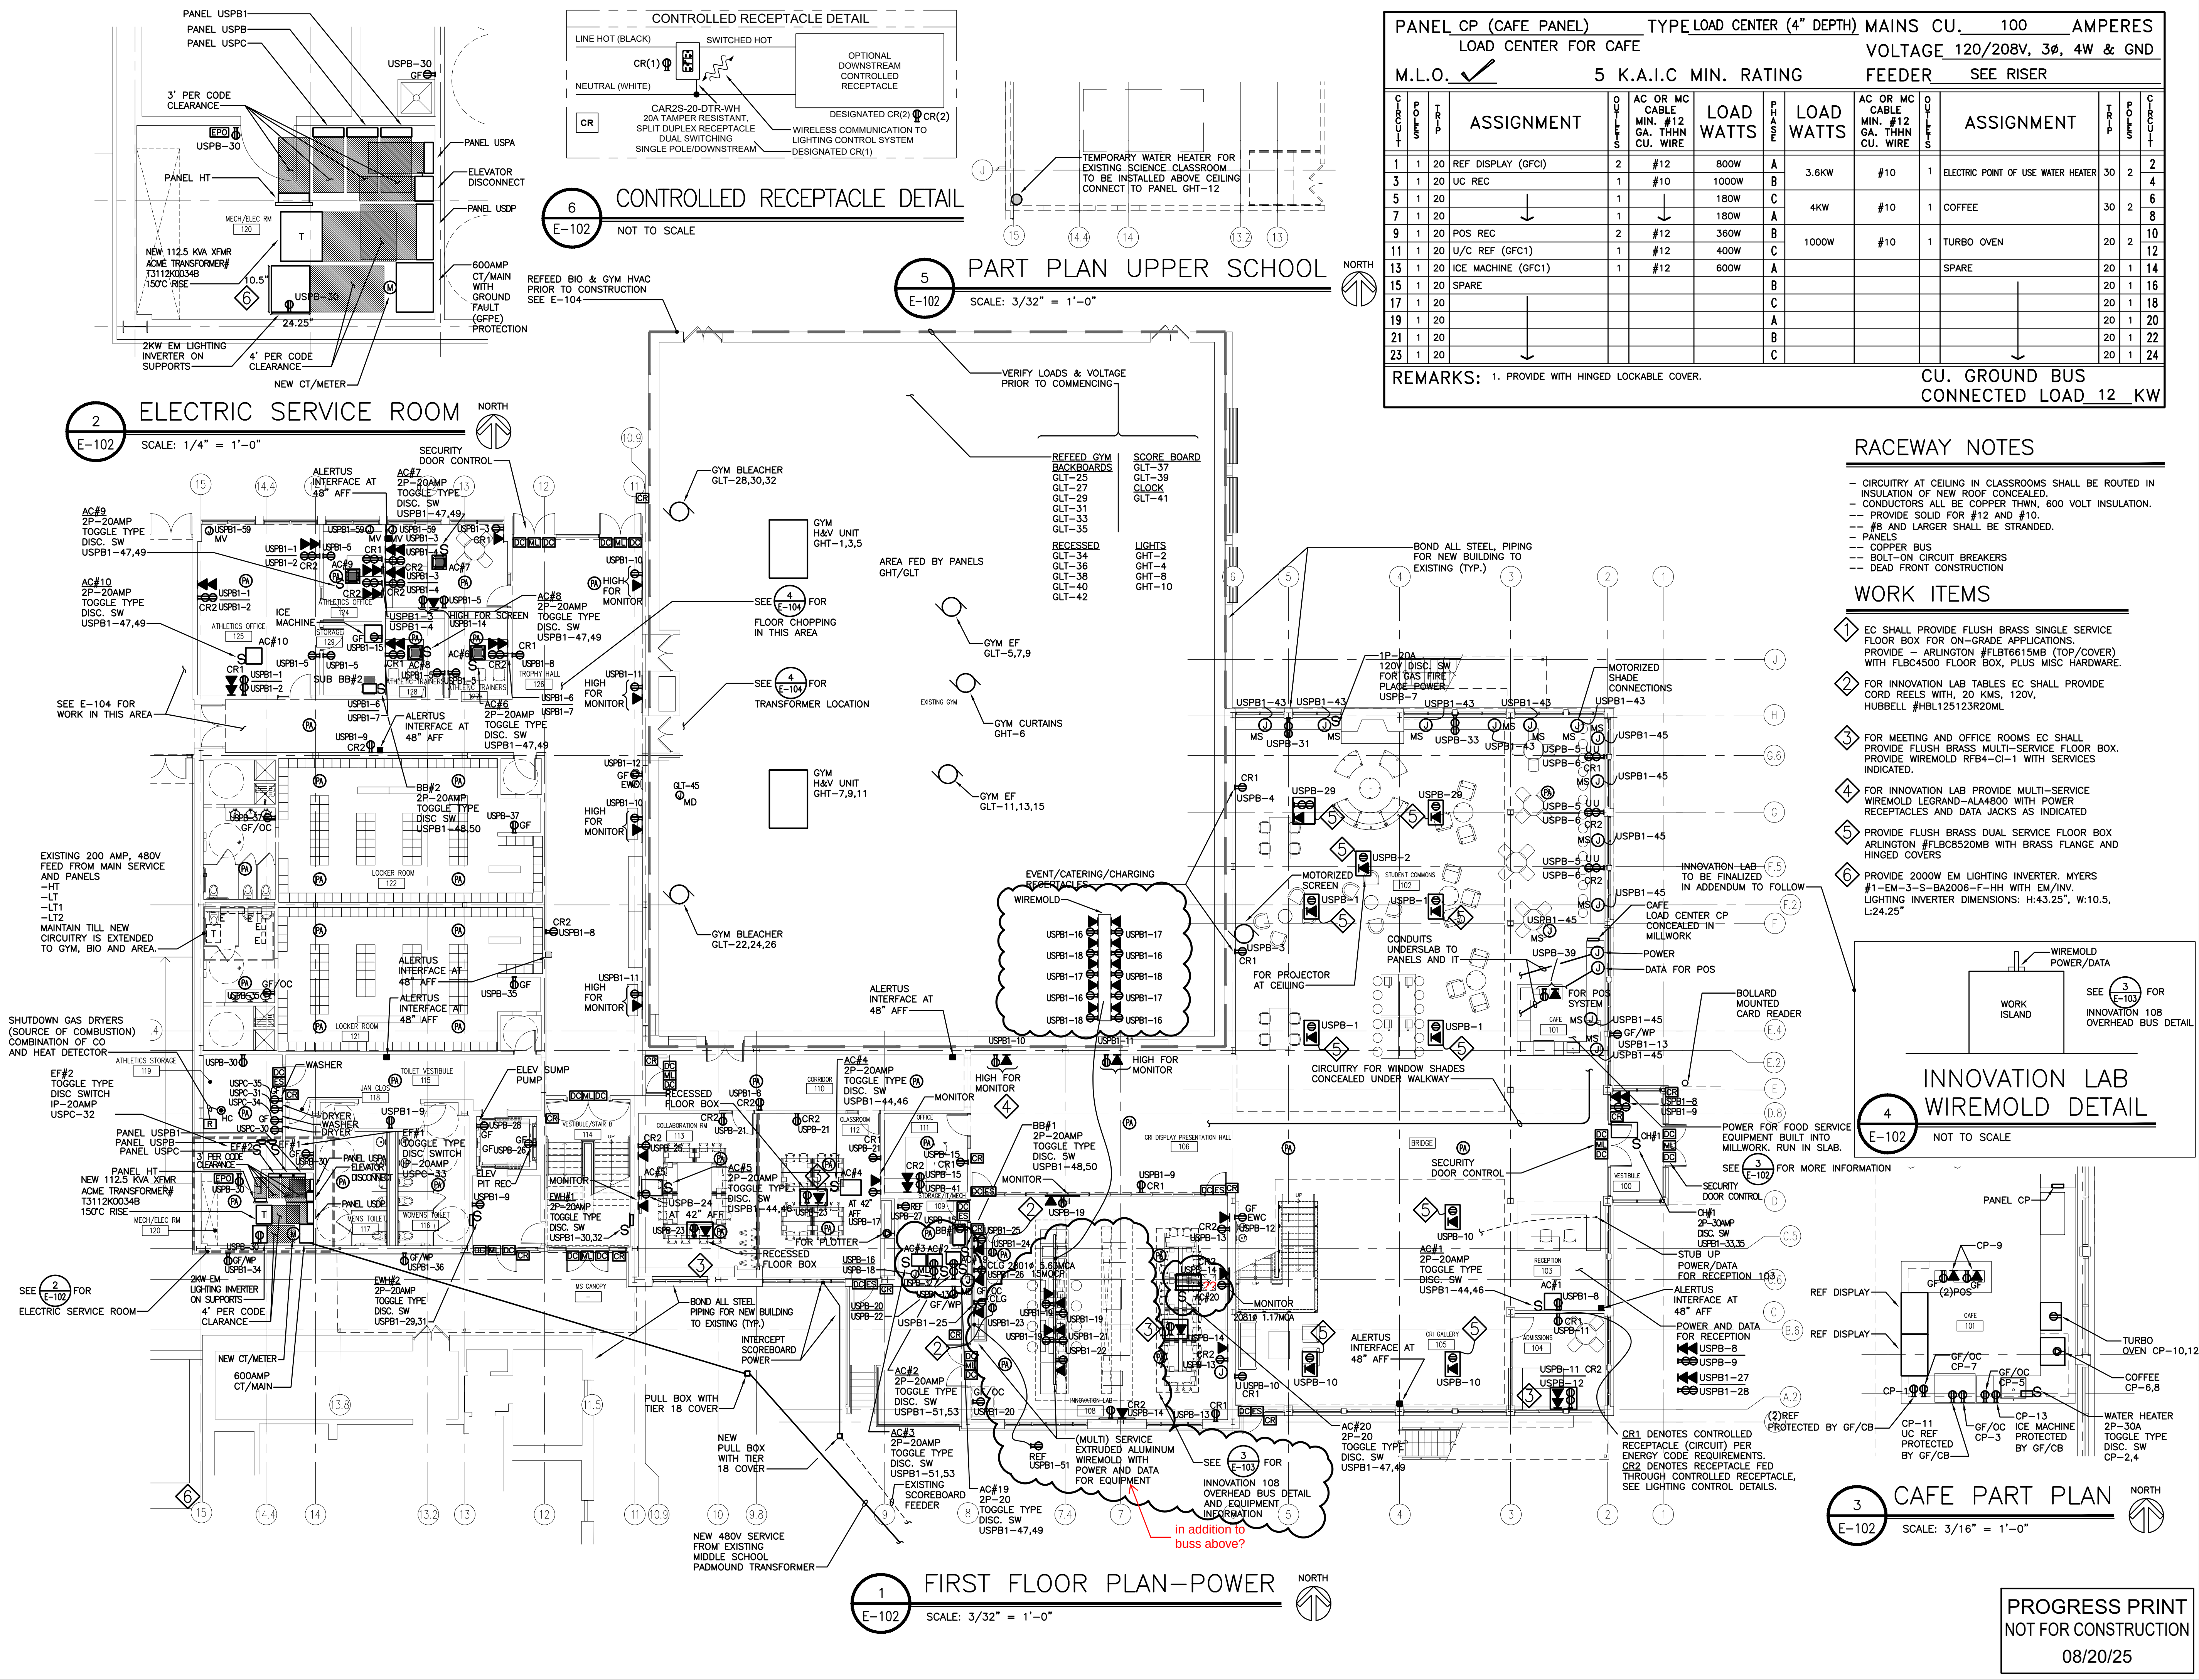

T:\North\2023\2302 KING SCHOOL UPPER SCHOOL CRI+COMMONS ADDITION PROJECT\2302 E-104 UPPER SCHOOL-ROOF PLAN.dwg, 8/20/2025 5:08:45 PM, ARCH full bleed D (36.00 x 24.00 inches), F.G.

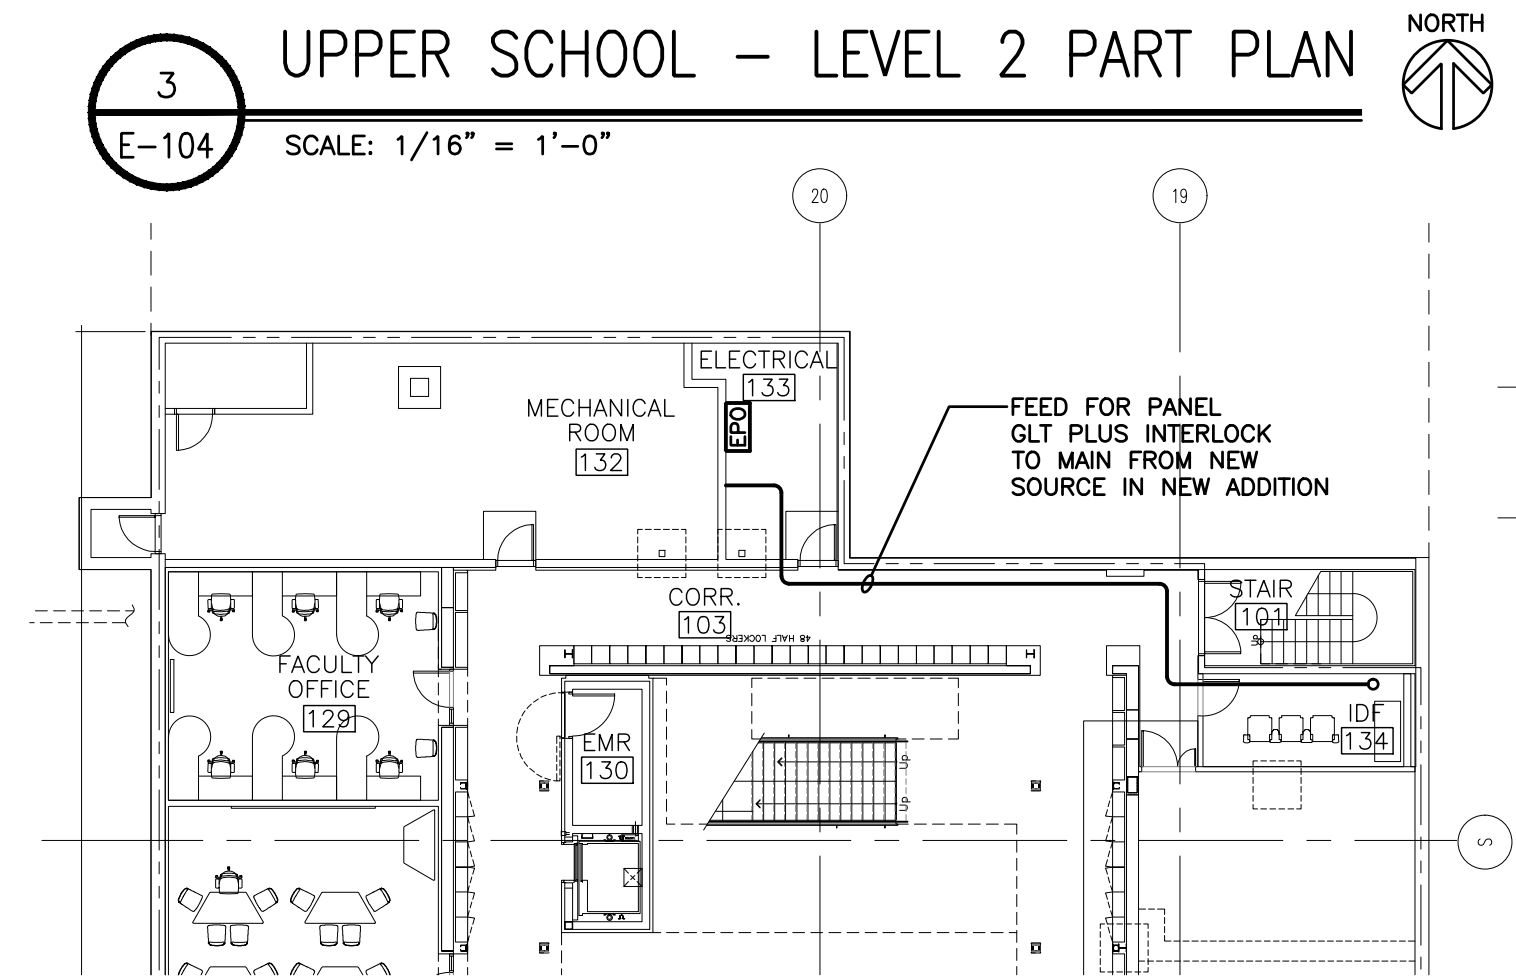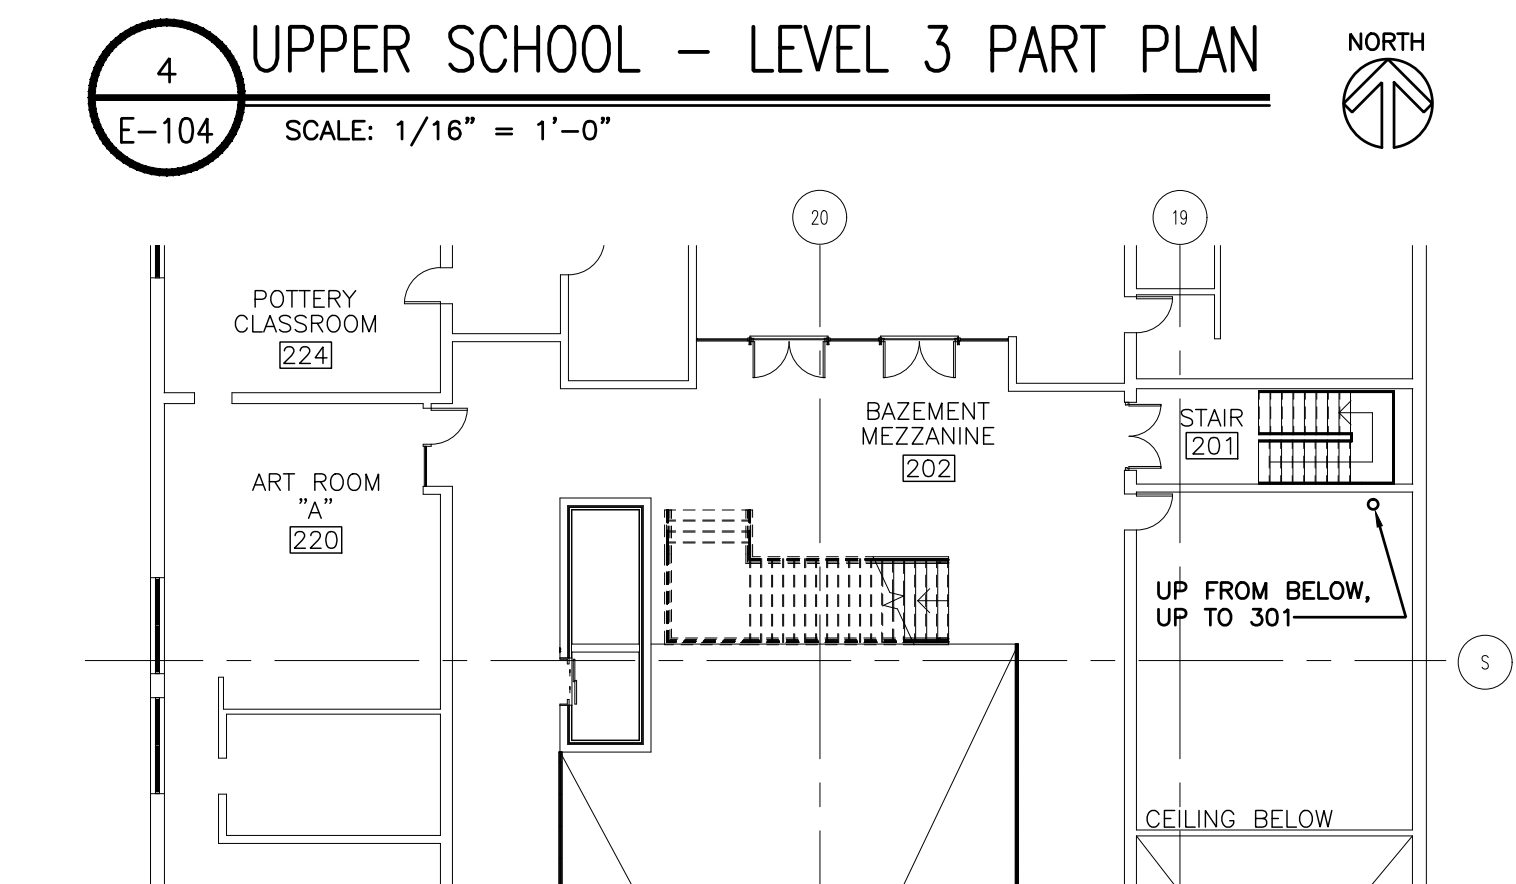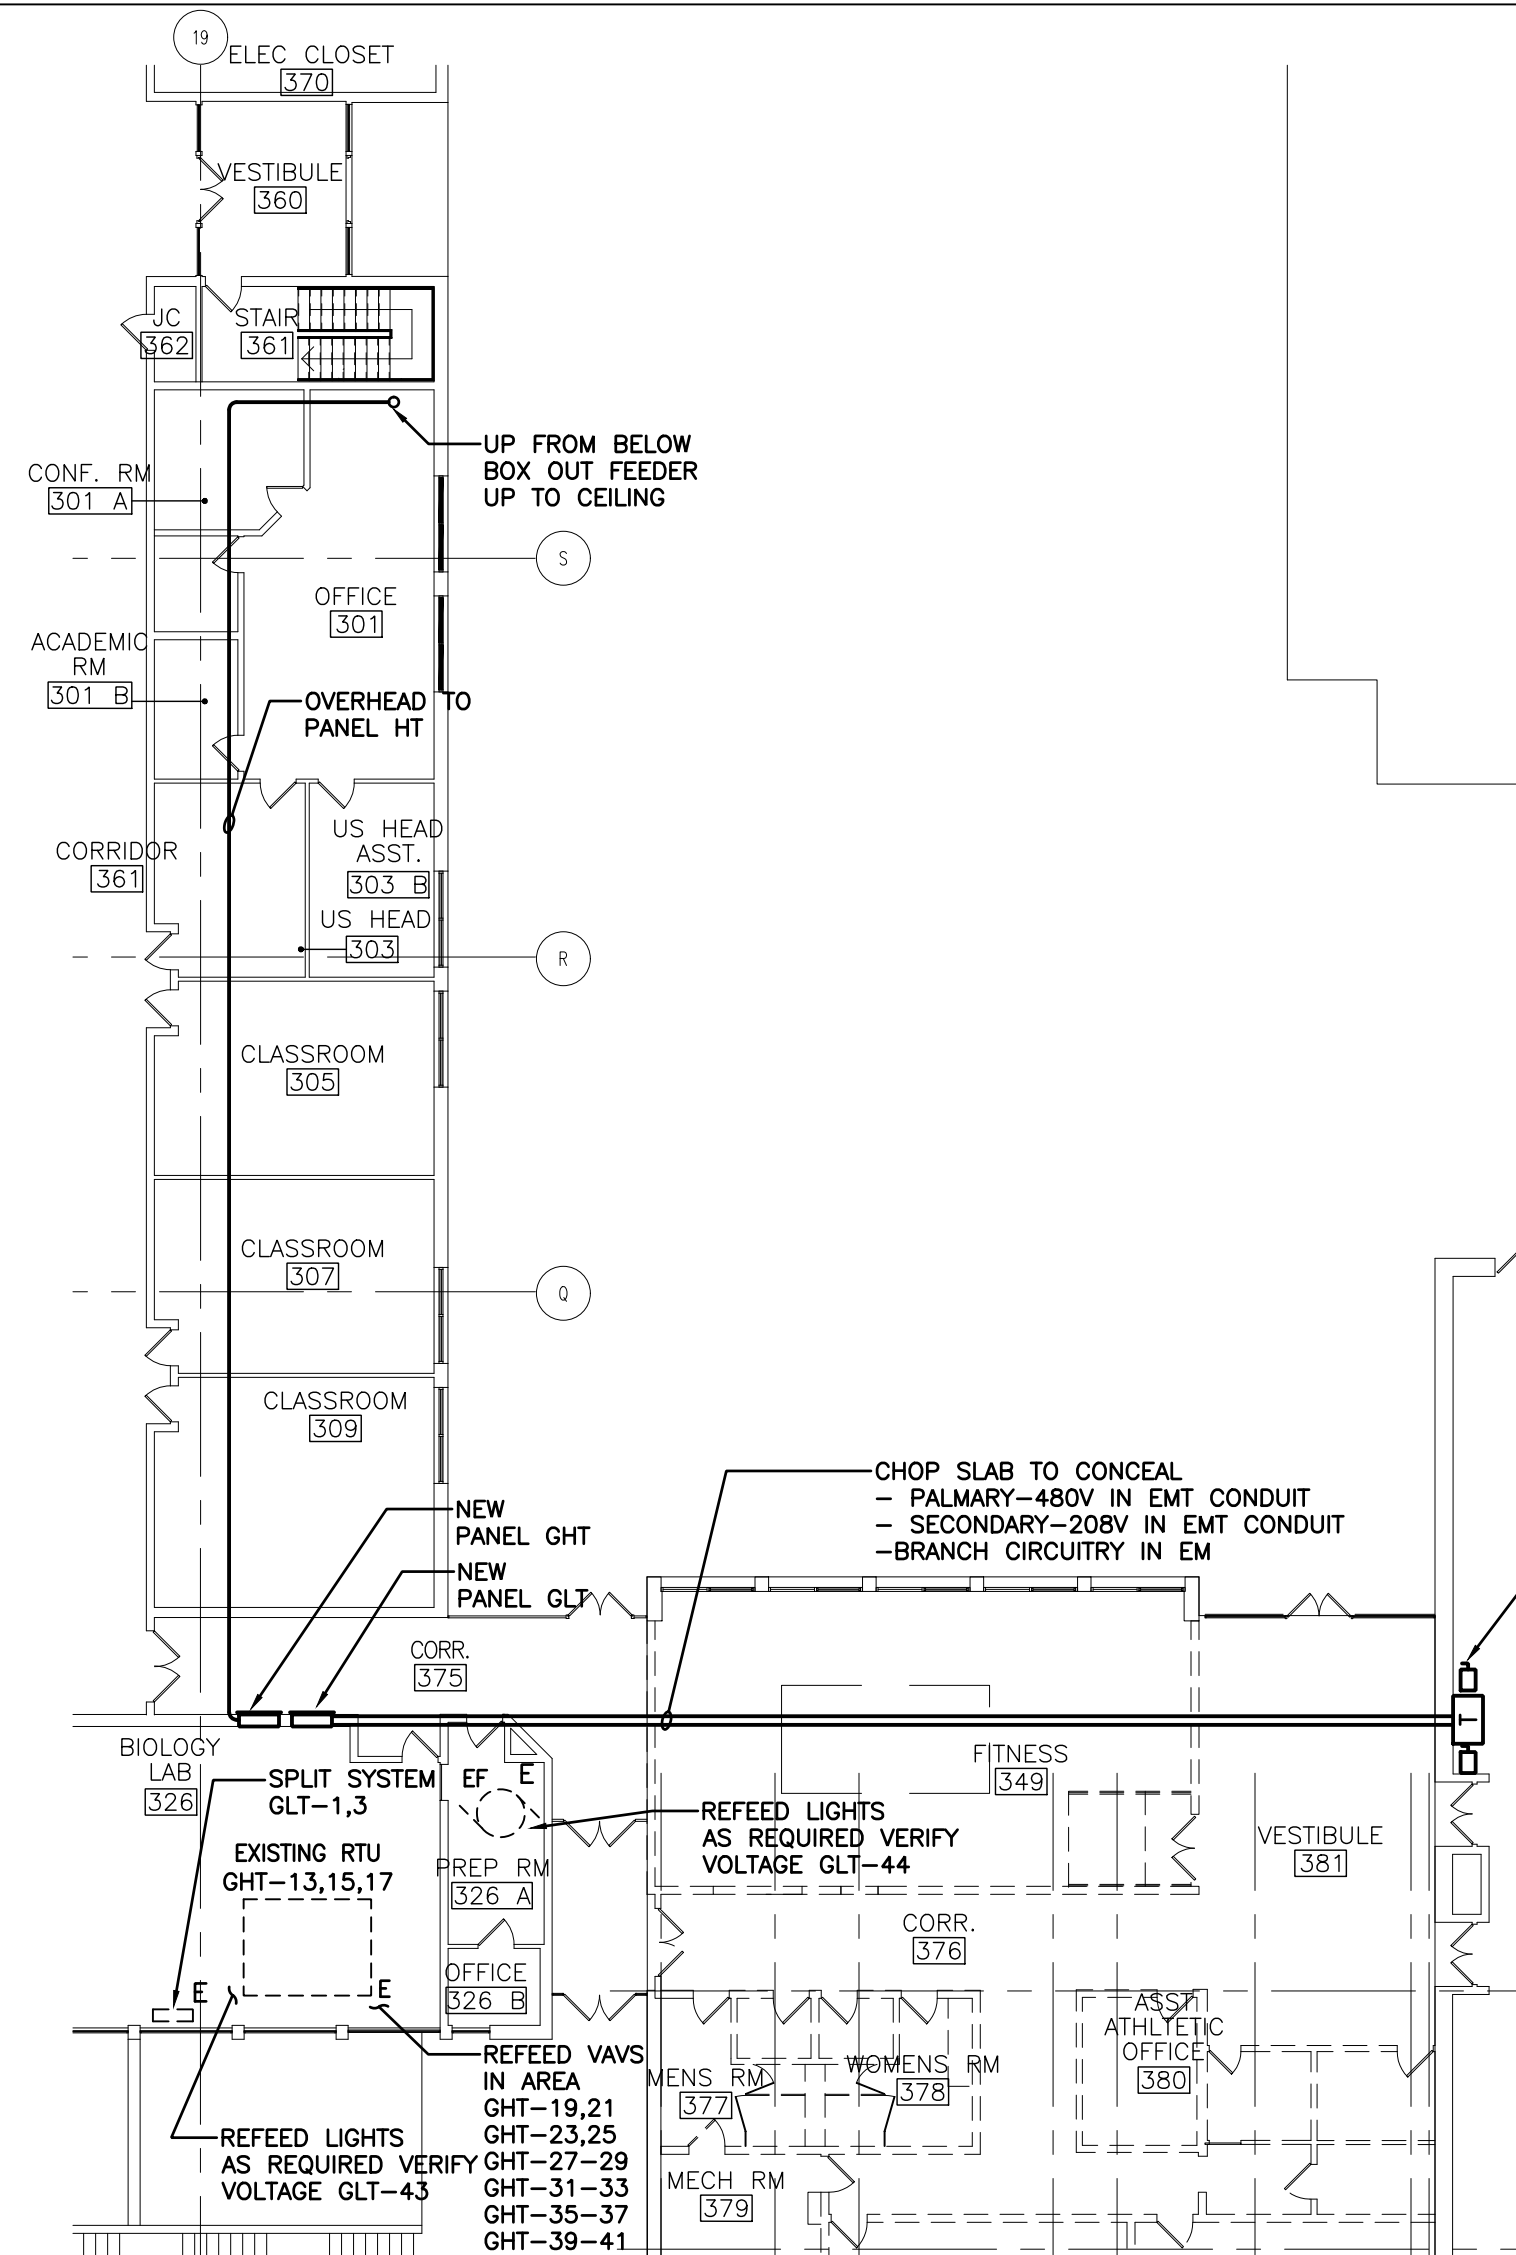


PANEL F1 (FITNESS PANEL)										TYPE SURFACE MAINS CU. 100 AMPERES									
10 K.A.I.C MIN. RATING										VOLTAGE 120/208V, 3Ø, 4W & GND									
M.L.O. ✓										FEEDER SEE RISER									
C C																			

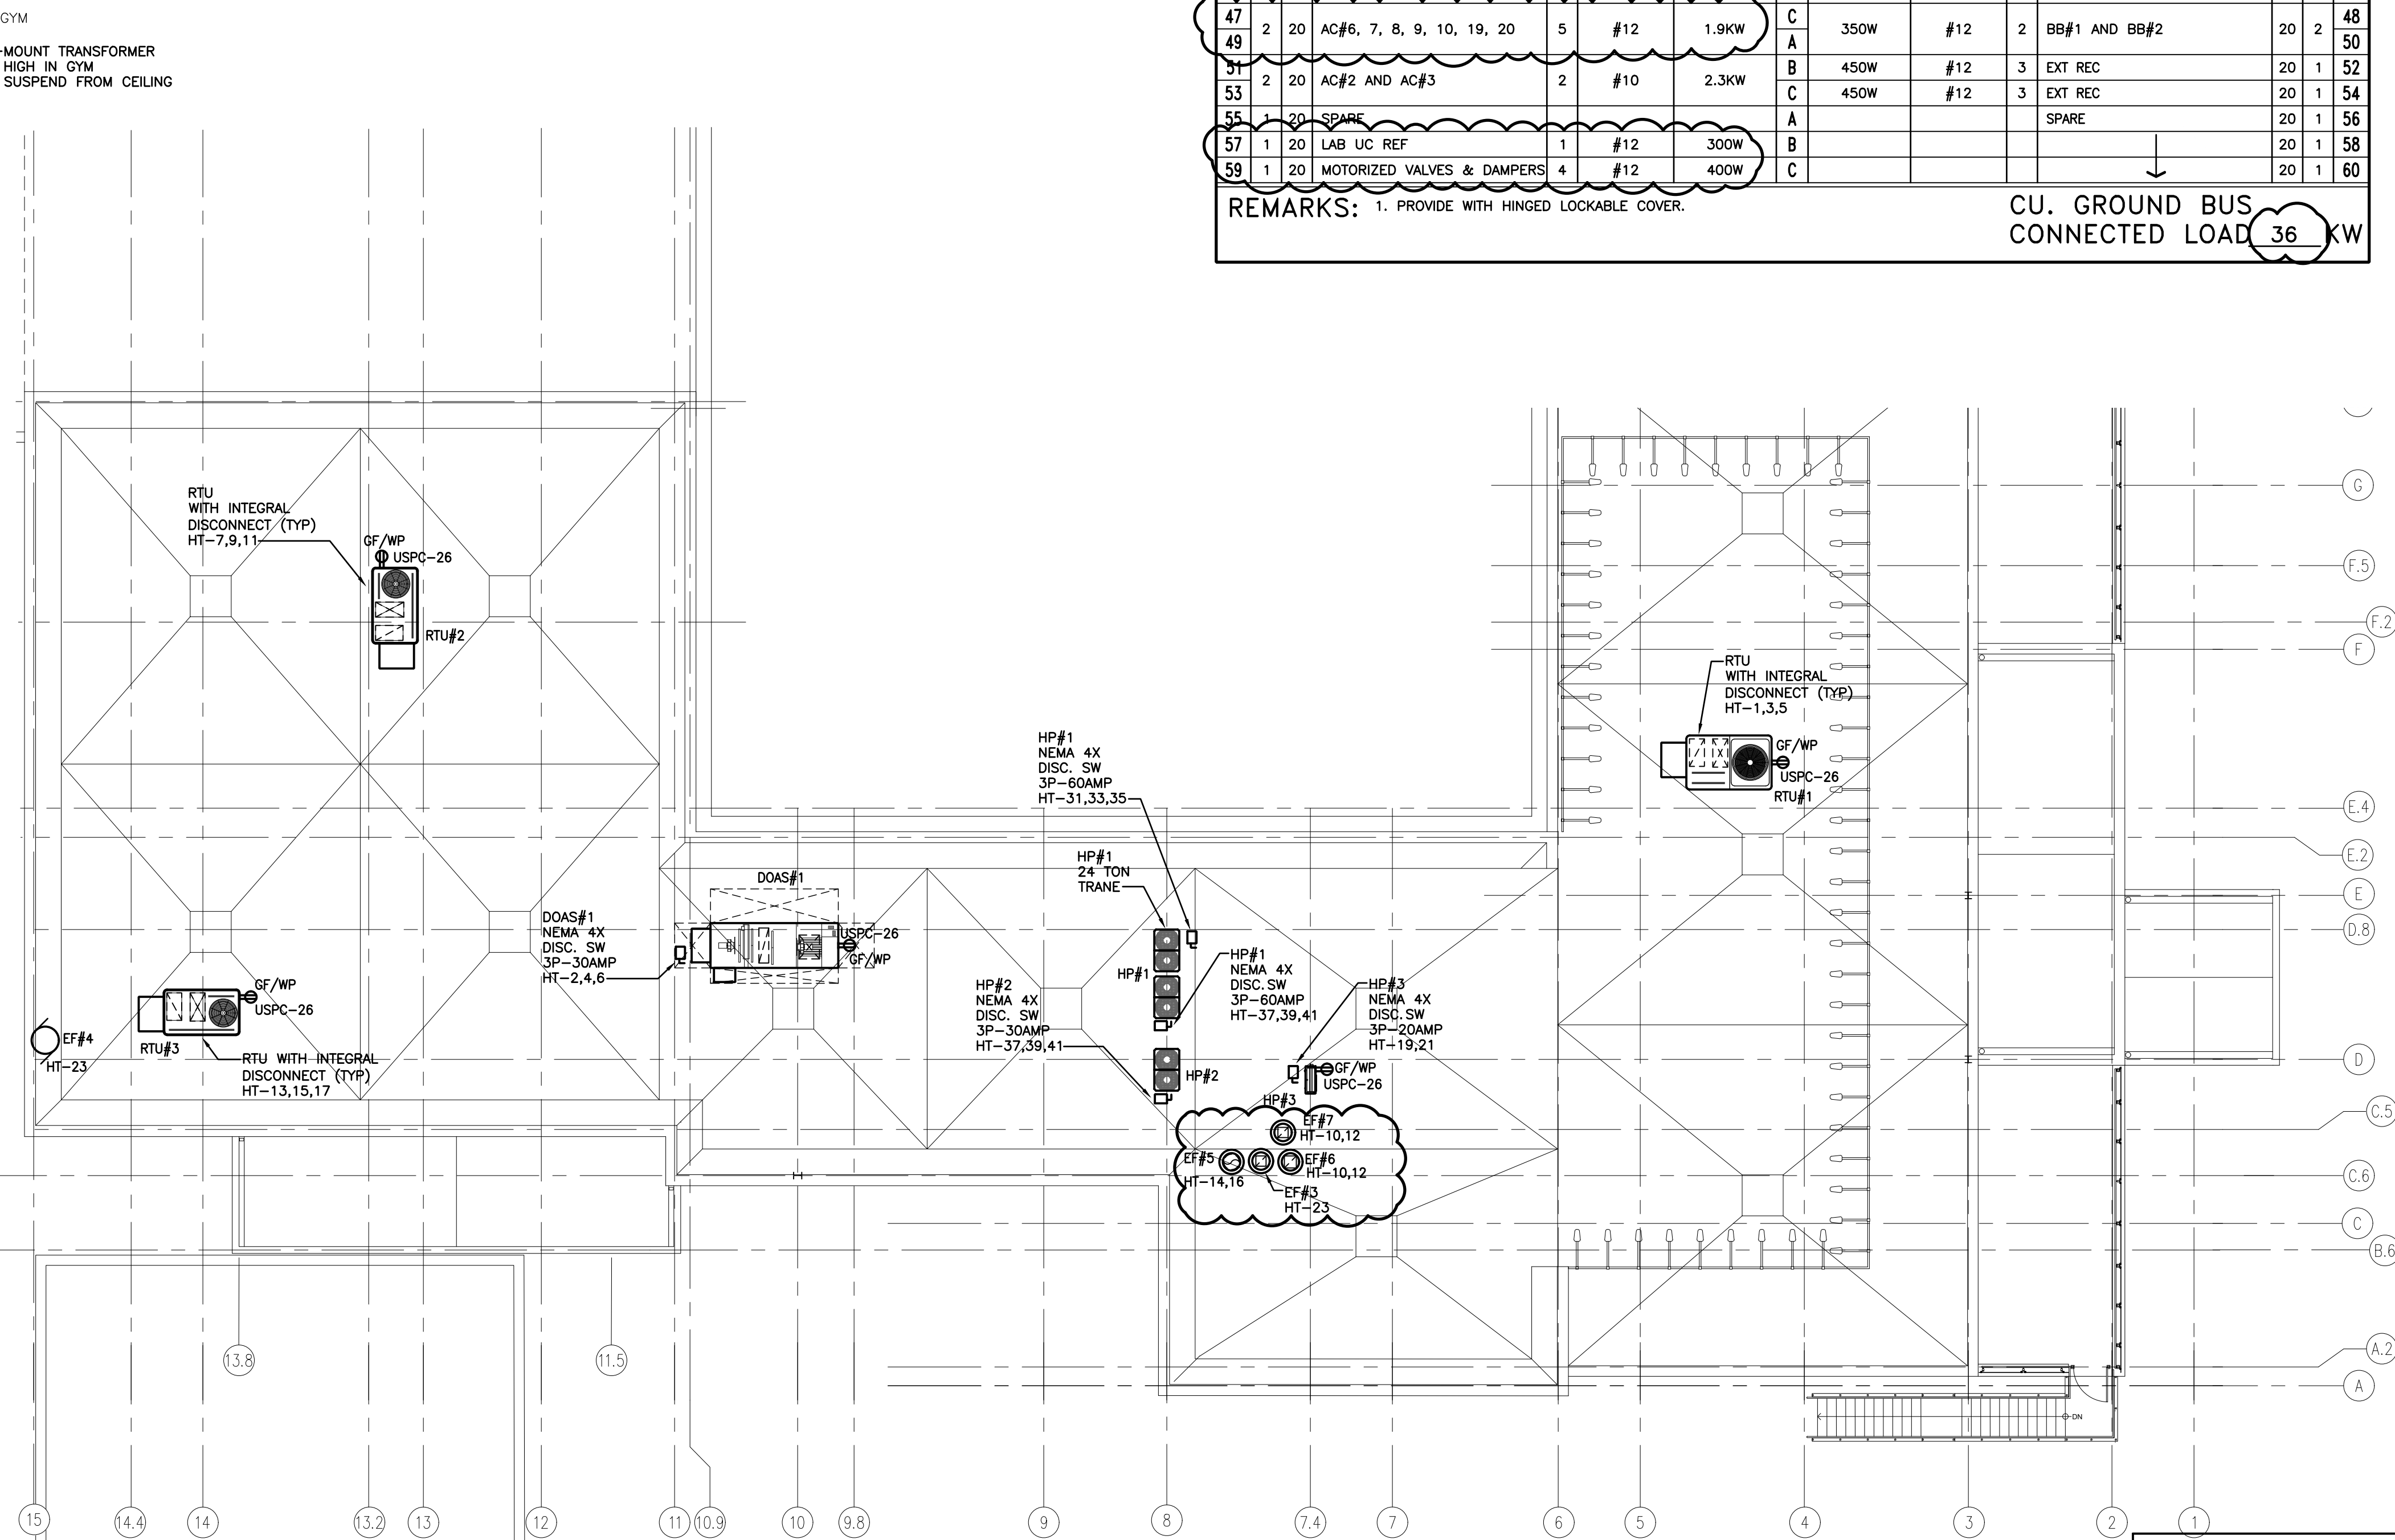

T:\North\2023\2302 KING SCHOOL UPPER SCHOOL CR1+COMMONS ADDITION PROJECT\2302 E-105 INNOVATION LAB EQUIPMENT PLAN - POWER.dwg, 8/20/2025 5:04:49 PM, ARCH full bleed D (36.00 x 24.00 inches), F.G.


INNOVATION LAB EQUIPMENT SCHEDULE					
NEW	NAME	PLACEMENT	POWER	PANEL CIRCUIT#	FED BY
①	PRUSA I3 3D PRINTERS	TABLETOP	120V,~4 EACH IDEALLY 2 CIRCUITS	USPB1-14, USPB1-15	TABLE WIREMOLD ①
②	SOLDERING STATIONS	TABLETOP	120V,~4 LOW DRAW (~50W EACH)	N/A	NOT FIXED ②
③	HAZARDOUS MATERIALS CABINET	FLOOR-STANDING	NONE	N/A	N/A ③
④	EINSCAN-SE 3D SCANNER	TABLETOP	120V,<50W	N/A	NOT FIXED ④
⑤	FORMLABS FORM 4	TABLETOP	120V,~60W	USPB1-14, USPB1-18	TABLE WIREMOLD ⑤
⑥	FORM WASH	TABLETOP	120V,~30-60W	USPB1-14, USPB1-18	TABLE WIREMOLD ⑥
⑦	FORM CURE	TABLETOP OR SHELF	120V,~60W EACH	USPB1-14, USPB1-18	TABLE WIREMOLD ⑦
⑧	FORMLABS FORM 3+	TABLETOP	120V,<100W	USPB1-14, USPB1-18	TABLE WIREMOLD ⑧
⑨	VINYL CUTTER (FLOOR-STANDING)	FLOOR-STANDING	120V,<100W	N/A	BUS ⑨
⑩	DESKTOP PCS WITH GAMING MONITORS	TABLETOP	120V,800W PER TOWER	USPB1-19	TABLE WIREMOLD ⑩
⑪	FLATBED SCANNER	TABLETOP	120V	N/A	NOT FIXED ⑪
⑫	EPILOG FUSION M2 LASER CUTTER	FLOOR-STANDING	120V OR 240V 20A (BASED ON WATTAGE)	N/A	BUS ⑫-20 ⑫
⑬	HEAT PRESS MACHINE (CRODT AUTOPRESS)	TABLETOP	120V, ~9A	N/A	NOT FIXED ⑬
⑭	VACUUM FORMING MACHINE (MAYKU)	TABLETOP	110V-120V, ~9A	N/A	NOT FIXED ⑭
⑮	OSCILLOSCOPE (ROSL DSI054Z OR SIMILAR)	TABLETOP	120V	N/A	NOT FIXED ⑮
⑯	DIGITAL SEWING & EMBROIDERY MACHINE	TABLETOP	120V	N/A	BUS ⑯-20 ⑯
⑰	BENCHTOP UV FLATBED PRINTER	TABLETOP OR STAND	120V, 5-10A	N/A	BUS ⑰
⑱	WAZER WATERJET	FLOOR-STANDING	110V, 16A (DEDICATED 20A CIRCUIT)	N/A	BUS ⑱
⑲	FRIDGE (NO FREEZER)	UNDER-COUNTER OR STANDALONE	120V,~1-2A	USPB1-57	WALL REC ⑲
⑳	BIGREP ONE XL 3D PRINTER	FLOOR-STANDING	240V, 16A	N/A	BUS ⑳
㉑	SURECOLOR F2100 DTG PRINTER	FLOOR OR LOW TABLE	120V	N/A	BUS ㉑
㉒	BAMBU LAB H2D 3D PRINTER	TABLETOP	100-240V AC, 50/60HZ, 24W MAX	N/A	NOT FIXED ㉒
㉓	SPRAY BOOTH	FLOOR-STANDING	120V, 600W	USPB1-20	WALL REC ㉓

STARLINE T3 BUS BUS PLUG IN CHART			
DESIGNATION	FOR EQUIPMT.	RECEPT.	STARLINE BUS MANUF. #
A	⑨	1P-20A CORD REEL	5-20Q-UCT3C06X-10-1- 5BXXN-XXX-6084
B	MISC	1P-20A CORD REEL	5-20Q-UCT3C06X-10-1- 5BXXN-XXX-6084
C	⑫	2P-20A	T3-STYLE #12 2P-20A CB & REC
D	⑰	1P-20A	5-20Q-UCT3C06X-10-1- 5BXXN-XXX-6084
E	㉑	1P-20A	5-20Q-UCT3C06X-10-1- 5BXXN-XXX-6084
F	㉒	2P-20A	T3-STYLE #12 2P-20A CB & REC
G	⑱	1P-20A	5-20Q-UCT3C06X-10-1- 5BXXN-XXX-6084
BUS - (3) 24' SEGMENTS T3, 120, 208V, 3PH, 4W & 6GND			
ADDITIONAL AS SPARE		(1) T3 #12 2P-40A CB & REC (1) T3 #12 2P-30A CB & REC	
		(2) T3 5-206-UCT3606X-10-1 5B-XXH-XXX-6084 CORD REELS	

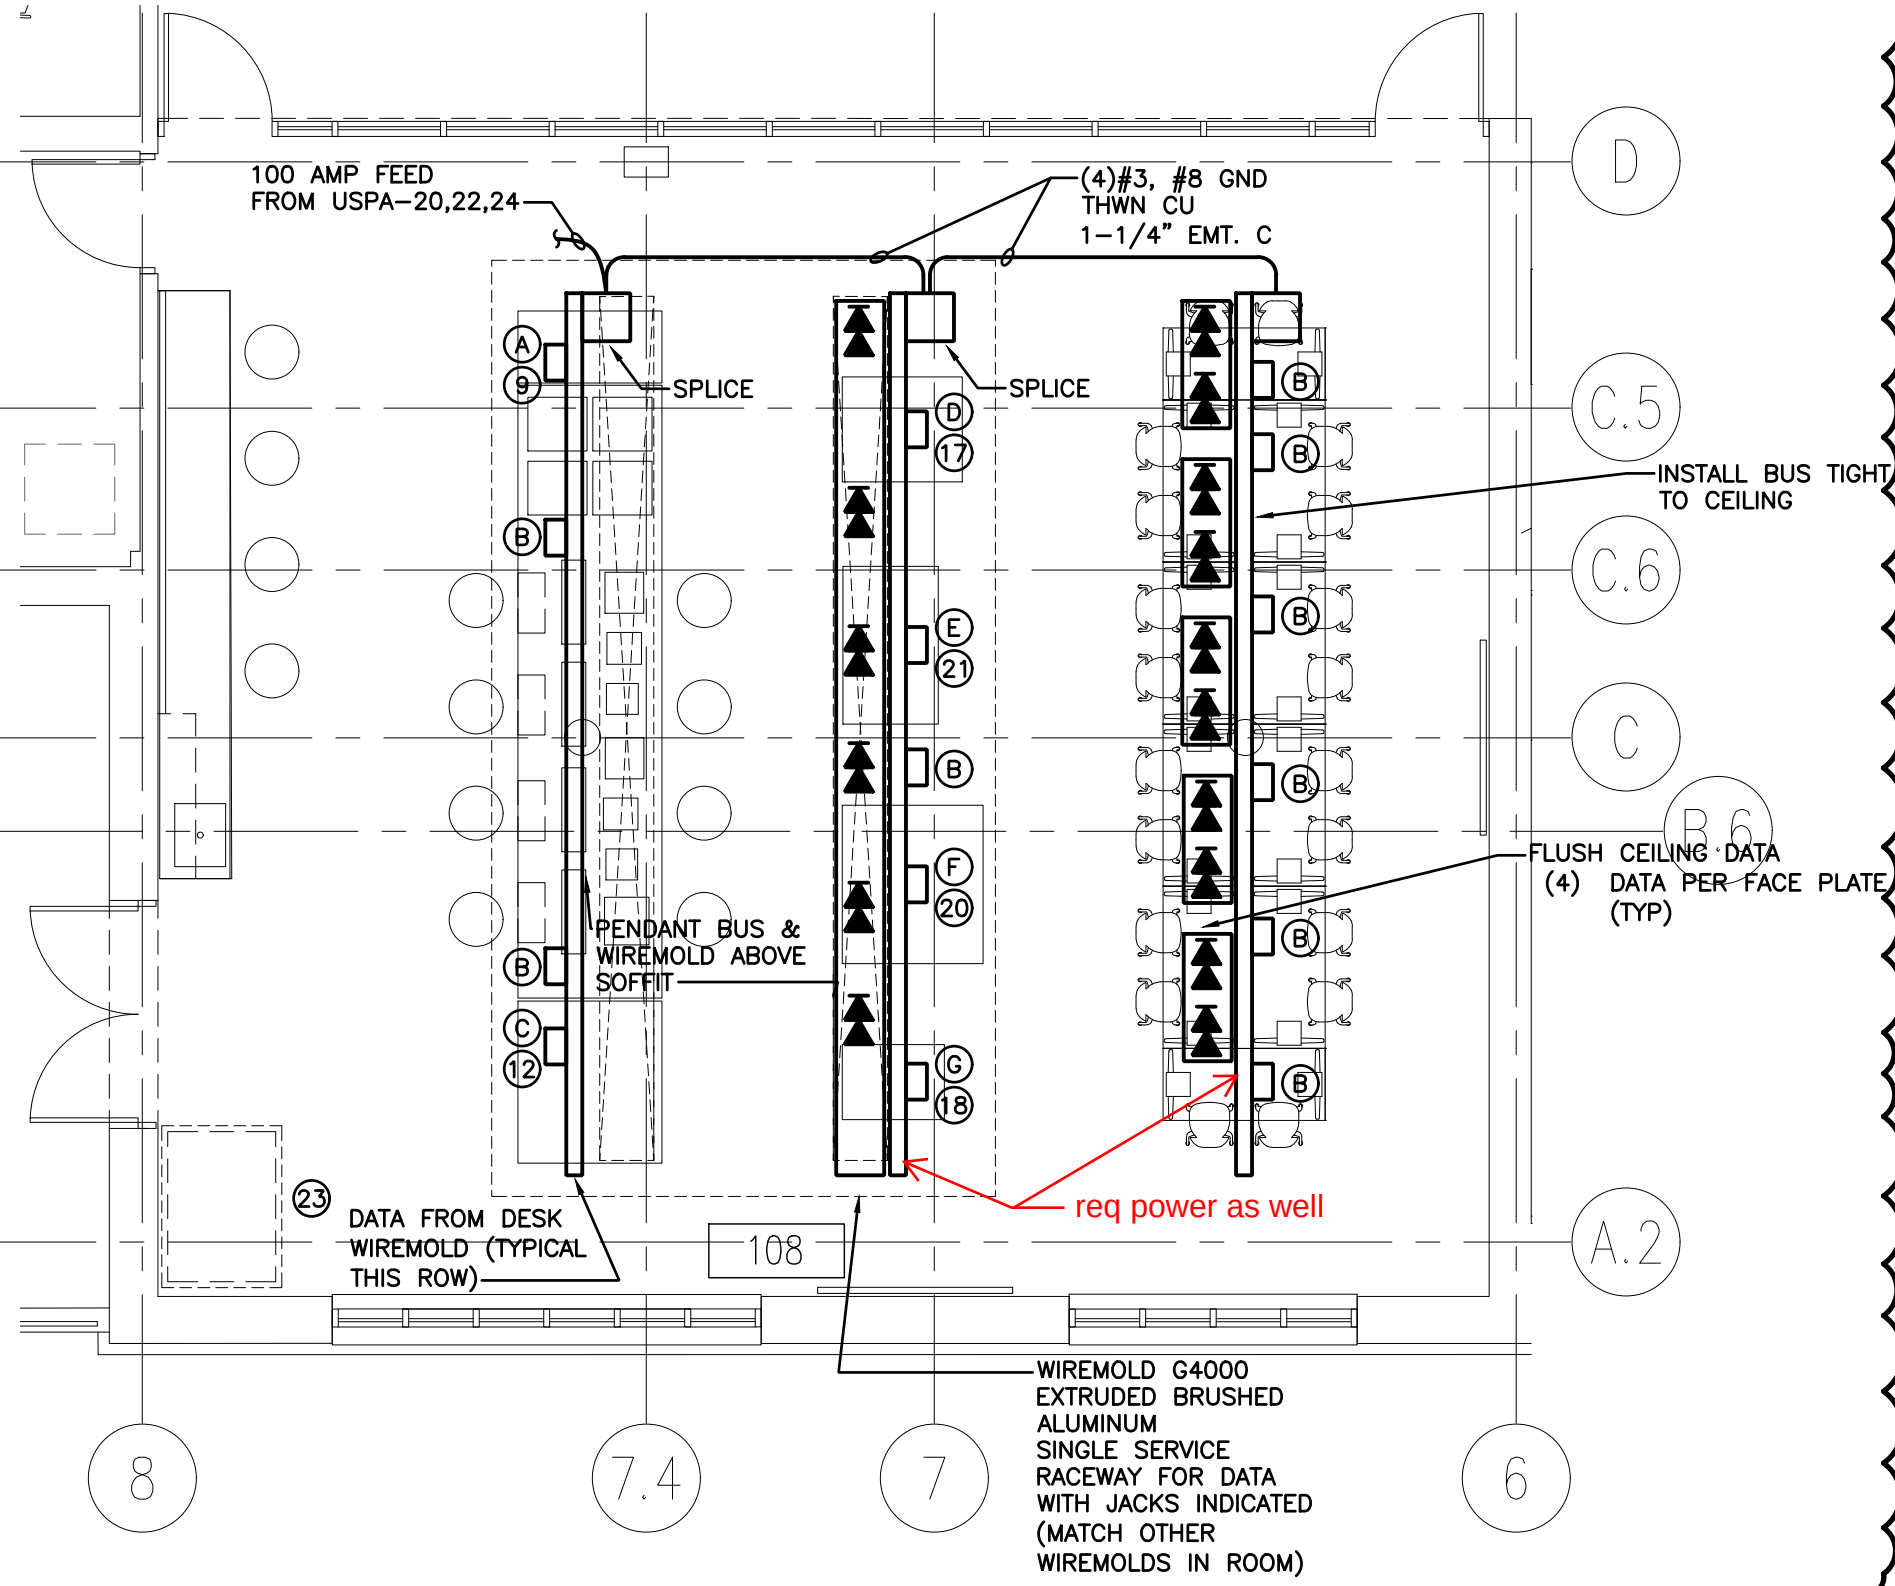

2 INNOVATION LAB OVERHEAD BUS DETAIL NORTH


SCALE: 3/16" = 1'-0"

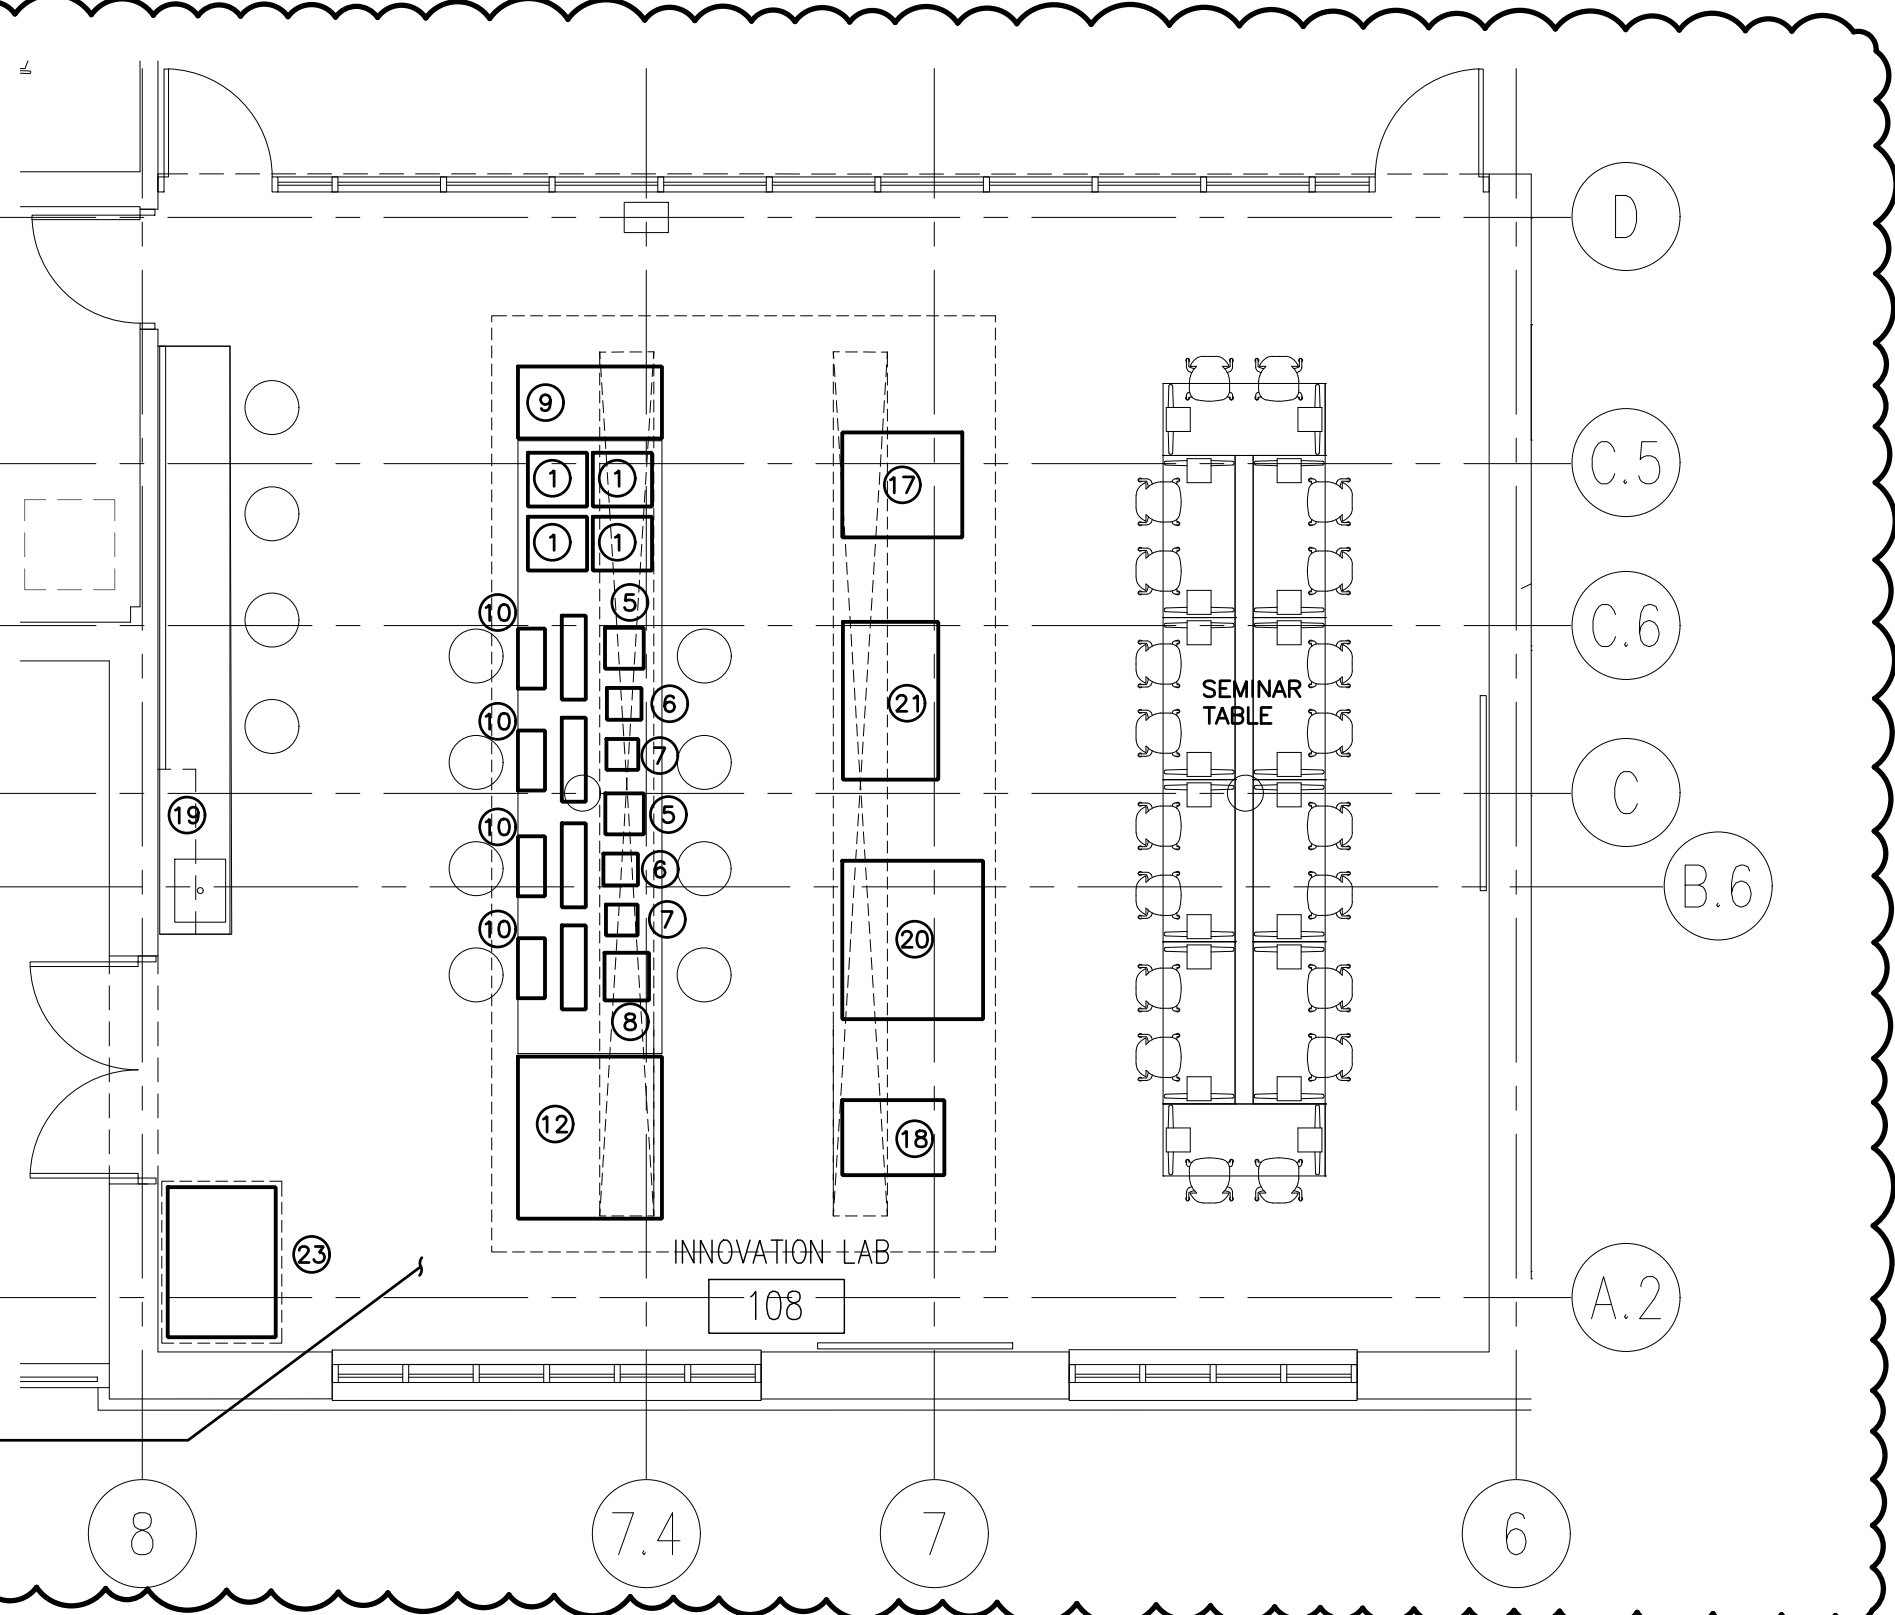

1 INNOVATION LAB EQUIPMENT PLAN - POWER NORTH

SCALE: 3/16" = 1'-0"

PROGRESS PRINT
NOT FOR CONSTRUCTION
08/20/25

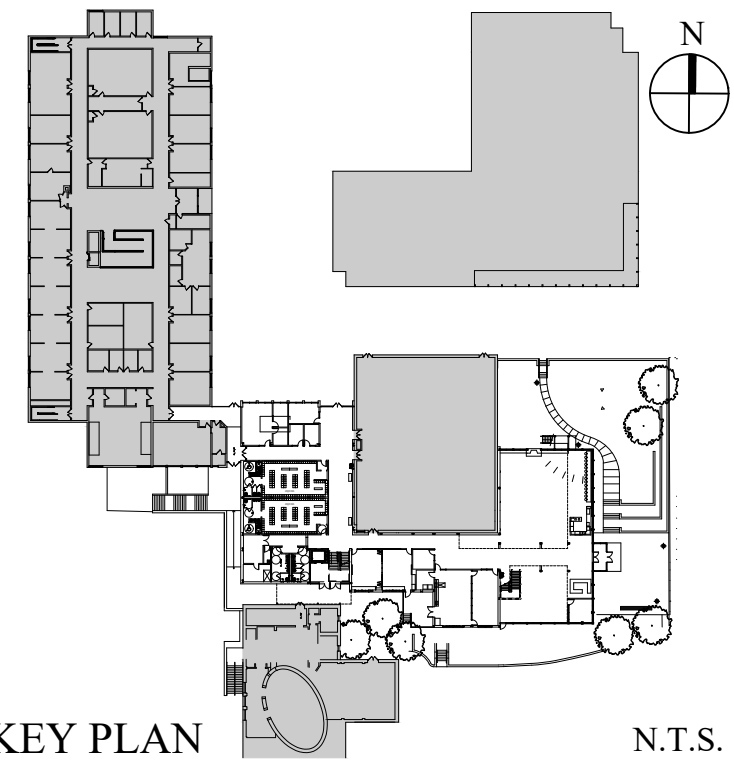

KEY PLAN N.T.S.

No.	Date	Revision
5.		
4.	06/30/2025	100% CD COMPLETE
3.	03/12/2025	50% CD COMPLETE - ADDENDUM 2
2.	02/18/2025	50% CD COMPLETE - ADDENDUM 1
1.	02/07/2025	50% CD COMPLETE - ISSUED FOR CD ESTIMATE
ARCHITECT		
PETER GISOLFI ASSOCIATES, LLP		
566 WARBURTON AVENUE		
HASTINGS-ON-HUDSON, NY 10706		
T: (914) 478-3677		
MEP ENGINEERS		
WATSKY ENGINEERS, PLLC		
68 PURCHASE STREET		
ROSELAND, NY 10580		
T: (914) 496-7859		
CODE CONSULTANT		
WILTON GREGORY GREW, AIA		
241 MAIN STREET SOUTH		
WOODBURY, CT 06798		
T: (203) 217-1074		
GEOTECHNICAL ENGINEER (BY OWNER)		
LANGAN CT, INC.		
355 LONG WHARF DRIVE		
NEW HAVEN, CT 06515		
(203) 962-5771		
STRUCTURAL ENGINEER		
DRPILA CONSULTING ENGINEERS		
143 MAIN STREET		
NYACK, NY 10960		
T: (845) 727-7793		
ROOFING CONSULTANT		
WATSKY ENGINEERS, PLLC		
20 MADISON AVENUE		
VALHALLA, NY 10595		
T: (914) 448-3450		
SPECIFICATIONS		
CONSTRUCTION SPECIFICATIONS		
PO BOX 488		
MORGANVILLE, NJ 07751		
T: (732) 978-0700		
CIVIL ENGINEER (BY OWNER)		
REDNESS AND MEAD		
22 FIRST STREET		
STAMFORD, CT 06905		
(203) 327-0500		

Project Title

**KING SCHOOL
UPPER SCHOOL
CRI/COMMONS
ADDITION PROJECT**

1450 Newfield Avenue
Stamford, CT 06905

Drawing Title

**ELECTRICAL-POWER
INNOVATION LAB EQUIPMENT PLAN,
OVERHEAD BUS DETAIL & SCHEDULES**

Scale	Job No.	Date	Drawing No.
	2301.00	02/2025	
Drawn	Checked	Approved	E-105

Peter Gisolfi Associates
Architects + Landscape Architects, LLP

566 Warburton Avenue
Hastings on Hudson, NY 10706
(914) 478-3677

PETER GISOLFI ASSOCIATES LLP

T:\Tonorth\2023\2302 KING SCHOOL UPPER SCHOOL CRTH-COMMONS ADDITION PROJECT\2302 E-106 SCHEDULES.dwg, 8/20/2025 5:05:53 PM, ARCH full bleed D (36.00 x 24.00 inches), F.G.

GENERAL NOTES

1. ALL WORK SHALL COMPLY WITH THE STATE'S ADOPTED NFPA AND ADOPTED NEC WITH LOCAL SUPPLEMENTS AND SUNY REQUIREMENTS.
2. WORK PERFORMED SHALL BE UNDERTAKEN WITH PRECAUTION BEING MAINTAINED TO ENSURE SAFETY OF PERSONNEL AND EQUIPMENT IN AREA IN SUCH A MANNER SO AS NOT TO DISTURB NORMAL WORK PROCEDURE.
3. WORK SHOWN IS DIAGMMATIC. EXACT LOCATION OF CONDUIT RUNS SHALL BE DETERMINED IN FIELD. LOCATE NEW CONDUIT RUNS TO CLEAR EXISTING AND NEW PIPING, DUCTWORK, ACCESS DOORS AND OTHER OBSTRUCTIONS. COORDINATE CONDUIT ROUTING WITH WORK OF OTHER TRADES AND ALTER WHERE NECESSARY TO AVOID INTERFERENCE.
4. PROVIDE IDENTIFICATION TAGS FOR NEW WIRING AND INSTALL AT EACH END AND IN INTERMEDIATE PULL/JUNCTION BOXES, CABINETS, HOUSINGS, ETC. INDICATE ON TAGS, LEGIBLY, MINIMUM 1/4" HIGH LETTERS, THE POINTS OF ORIGIN AND TERMINATION OF EACH CIRCUIT. INCLUDE DATE OF INSTALLATION.
5. WHEN PORTION OF AN EXISTING CIRCUIT IS TO BE REMOVED OR IS ON WALL BEING REMOVED, CONTRACTOR SHALL MAKE NECESSARY MODIFICATIONS AND/OR ADDITIONS REQUIRED TO MAINTAIN CIRCUIT CONTINUITY OF UNCHANGED PORTION.
6. VERIFY EXACT LOCATION OF EQUIPMENT, SHOWN OR NOT SHOWN, IN FIELD PRIOR TO PERFORMING ANY WORK.
7. VERIFY IN FIELD THAT ANY EQUIPMENT AND WIRING TO BE REMOVED DOES NOT SERVE ACTIVE EQUIPMENT TO REMAIN PRIOR TO DISCONNECTING/ REMOVING.
8. INSTALL CONDUIT RUNS AS CLOSE TO CEILING DECK AS POSSIBLE. PROVIDE REQUIRED CONDULETS, ELBOWS, FITTINGS, OFFSETS, AND PULLBOXES.
9. CONDUITS SHALL BE PROPERLY SUPPORTED FROM CEILING DECK ABOVE. NO CONDUIT SHALL BE SECURED TO, SUPPORTED BY OR HUNG FROM DUCTWORK OR PIPING OR OTHER SUCH ITEMS.
10. WORK REQUIRING SHUT-DOWN OF ELECTRIC SERVICE SHALL BE PERFORMED DURING PRE-SCHEDULED SHUT-DOWN AS SCHEDULED AND APPROVED BY ARCHITECT. INCLUDE COSTS IN BID.
11. NEW WORK SHALL BE COMPATIBLE WITH EXISTING SYSTEM AND EQUIPMENT.
12. PROVIDE CUTTING AND PATCHING REQUIRED FOR ELECTRICAL INSTALLATION.
13. PROVIDE SLEEVES FOR RACEWAYS PIERCING FIRE RATED WALLS, FLOORS, AND OTHER CONSTRUCTION OBSTACLES.
14. MATERIALS REMOVED BY CONTRACTOR AND NOT REQUIRED FOR INSTALLATION SHALL BE REMOVED FROM PREMISES AND DISPOSED OF IN LEGAL MANNER, IMMEDIATELY WHEN SO DIRECTED BY ARCHITECT.
15. APPLY LABELING ON CONDUIT FOR BUILDING ALARM CIRCUITRY AT INTERVALS OF 20 FT.
16. CONDUCTORS IN PARALLEL SHALL BE INSTALLED IN STRICT ACCORDANCE WITH APPLICABLE CODES.
17. PHASING OF ELECTRICAL WORK SHALL COMPLY WITH "PHASING OF THE WORK" AS DESCRIBED BY ARCHITECT.
18. PROVIDE BLANK COVERS ON ABANDONED OR UNUSED OUTLET BOXES.
19. MAKE FINAL CONNECTIONS FOR MOTORIZED EQUIPMENT OR EQUIP. SUBJECT TO VIBRATION, WITH FLEXIBLE RACEWAY.
20. IF ANY DEVIATIONS/VARIATIONS ARE DISCOVERED BETWEEN FLOOR PLANS AND CONNECTION DIAGRAMS, THE CONTRACTOR SHALL PROVIDE FOR THE MOST EXPENSIVE SITUATION WITH CREDIT SUBMITTED, SHOULD THE LESSER AMOUNT BE REQUIRED.
21. WHERE THE PLANS DO NOT INDICATE THE BRANCH CIRCUIT WIRING AND CONDUIT FOR FIXTURES OR OUTLETS NOR THE CONDUIT SIZE FOR FEEDERS, PROVIDE THE CORRECT WIRING QUANTITY AND SIZE, INSTALLED IN CONDUIT, AS REQUIRED BY THE INDICATED CIRCUITRY AND THE NATIONAL ELECTRICAL CODE WITH LOCAL SUPPLEMENTS.
22. PROVIDE IDENTIFICATION ON EACH FACEPLATE, DISCONNECT SWITCH, PANEL, ETC. IDENTIFICATION OF WIRING DEVICE FACEPLATE SHALL CONSIST OF PANEL DESIGNATION AND CIRCUIT NUMBER OF DEVICE AS CONNECTED, UTILIZE BROTHER 'P-TOUCH' TYPE MATERIAL ADHERED TO FACEPLATE.
23. NEW SYSTEMS SHALL BE MADE OPERATIONAL AS SPACES ARE ACCEPTED, PROVIDE PERSONNEL, TESTING, SCHEDULING AS REQUIRED. INCLUDE COST IN BID.
24. LOCATIONS OF OUTLETS ARE APPROXIMATE AND FINAL LOCATION SHALL BE AS DIRECTED BY THE ARCHITECT. VERIFY ALL LOCATIONS BEFORE INSTALLATION. NO EXTRAS WILL BE ALLOWED FOR CHANGES UP TO 10'-0" FROM LOCATION SHOWN ON PLAN PRIOR TO ROUGH-IN.
25. REFER TO THE MECHANICAL/PLUMBING/SPECIALTY EQUIPMENT APPROVED SHOP DRAWINGS AND WIRING DIAGRAMS FOR POWER, CONTROL AND ALARM WIRING CONNECTIONS. OBTAIN NECESSARY POWER, CONTROL AND ALARM WIRING REQUIREMENTS FROM MECHANICAL/PLUMBING/SPECIALTY SUB-CONTRACTORS PRIOR TO BID AND INCLUDE IN BID.
26. CIRCUIT NUMBERS ON THE DRAWINGS ARE FOR IDENTIFICATION ONLY AND DO NOT INDICATE THE POSITION ON THE PANEL BOARD. CONNECT THE CIRCUITS WITH THE LIGHTEST LOADS AND THE RECEPTACLE CIRCUITS NEAR THE TOP OF THE PANEL AND THE MORE HEAVILY LOADED CIRCUITS NEAR THE BOTTOM. BALANCE ALL CIRCUITS EVENLY BETWEEN PHASES SO THAT FEEDER WIRES CARRY APPROXIMATELY EQUAL CURRENT. REBALANCE IF NECESSARY.
27. SECURITY SCOPE: EC SHALL PROVIDE 120 VOLTS, RACEWAYS (WITH DRAG LINES), BACK BOXES, FIRE ALARM CONNECTION (AS INDICATED), ROUGHT COORDINATE WITH SCHOOL/VENDOR FOR EXACT REQUIREMENTS PRIOR TO COMMENCING.
28. EC SHALL RUN ALL CIRCUITRY ACROSS EXPOSED CEILING IN PAINTED STEEL WIREMOLD, UNLESS CONCEALED IN WALL, UNDER FLOOR OR TUNNEL.
29. EC SHALL PROVIDE COORDINATION PLANS FOR ALL SURFACE RACEWAY (WIREMOLD) LAYOUTS FOR APPROVAL OF ENGINEER AND ARCHITECT, PRIOR TO COMMENCING
30. PRIOR TO CONSTRUCTION CONTRACTOR SHALL MARK OUT ALL UTILITIES FOR INTERIOR AND EXTERIOR.
31. PHASING OF ELECTRICAL WORK IS CRITICAL. FEEDS TO GHT/GLT SHALL BE COMPLETED PRIOR TO ANY OTHER WORK TO ENABLE CONTINUED USE OF GYM & BIO AREAS.

PANEL GLT (TO REFEED EXISTING)TYPE						MAINS CU. 200 AMPERES						
22 K.A.I.C MIN. RATING						VOLTAGE 120/208V, 3Ø, 4W & GND						
M.C.B. 200M.L.O. ✓						FEEDERSEE RISER						
C C R C I T	P O W E R	T R P	ASSIGNMENT	AC OR MC CABLE MIN. #12 GA. THHN CU. WIRE	LOAD WATTS	P H A S E	LOAD WATTS	AC OR MC CABLE MIN. #12 GA. THHN CU. WIRE	ASSIGNMENT	T R P	P O W E R	C C R C I T
1	2	30	BIO SPLIT SYSTEM	#10	2KW	A	1KW	#10	GYM HVAC CONTROL PNL	20	1	2
3						B	1KW	#10	GYM HVAC CONTROL PNL	20	1	4
5						C	360W	#12	FIRE ALARM	20	1	6
7	3	20	GYM EX FAN	#10	2KW	A	720W	#12	FIRE ALARM	20	1	8
9						B						10
11						C	3KW	#3	EXISTING LOAD	100	3	12
13	3	20	GYM EX FAN	#10	2KW	A						14
15						B						16
17						C			BLANK BUS			18
19	3	20	GYM EX FAN	#10	2KW	A						20
21						B						22
23	1	20	GYM LTS	#10	600W	C		#10	GYM BLEACHERS	20	3	24
25	1	20	GYM BACK BOARD		1KW	A						26
27	1	20				B						28
29	1	20				C		#10	GYM BLEACHERS	15	3	30
31	1	20				A						32
33	1	20				B			REC	20	1	34
35	1	20				C				20	1	36
37	1	20	SCOREBOARD			A				20	1	38
39	1	20	SCOREBOARD			B				20	1	40
41	1	20	CLOCK		180W	C				20	1	42
43	1	20	EXIST LTS	#12				#12	EXIST FAN	20	1	44
45	1	20	MOTORIZED DAMPER	#12	150W				SPARE	20	1	46
47	1	20	SPARE							20	1	48
49	1	20								20	1	50
51	1	20								20	1	52
53	1	20								20	1	54
55	1	20								20	1	56
57	1	20								20	1	58
59										20	1	60
REMARKS: 1. PROVIDE WITH HINGED LOCKABLE COVER.												
CU. GROUND BUS CONNECTED LOAD 20_KW												

PANEL GHT (TO REFEED EXISTING)TYPE						MAINS CU. 200 AMPERES							
22 K.A.I.C MIN. RATING						VOLTAGE 480/211V, 3Ø, 4W & GND							
M.L.O. ✓						FEEDER SEE RISER							
C C R C I T	P O W E R	T R P	ASSIGNMENT	AC OR MC CABLE MIN. #12 GA. THHN CU. WIRE	LOAD WATTS	P H A S E	LOAD WATTS	AC OR MC CABLE MIN. #12 GA. THHN CU. WIRE	ASSIGNMENT	T R P	P O W E R	C C R C I T	
1						A	1KW	#10	GYM LTS	20	1	2	
3	3	20	NORTH GYM HVAC	#10	3KW	B	1KW	#10	GYM LTS	20	1	4	
5						C	1KW	#10	GYM CURTAIN	20	1	6	
7						A	180W	#12	GYM LTS	20	1	8	
9	3	20	GYM HVAC	#10	9KW	B	180W	#12	GYM EM LTS	20	1	10	
11						C	2,500W	#10	TEMPORARY WATER HEATER	20	1	12	
13						A			SPARE	20	1	14	
15	3	60	RTU-9 (BIO)	#6	30KW	B				20	1	16	
17						C				20	1	18	
19						A				20	1	20	
21	2	20	VAV-9-4	#12	1KW	B				20	1	22	
23	2	20	VAV-9-5	#12	1KW	C				20	1	24	
25						A				20	1	26	
27						B				20	1	28	
29	2	20	VAV-9-6	#12	1KW	C				20	1	30	
31						A				20	1	32	
33	2	20	VAV-9-7	#12	1KW	B				20	1	34	
35						C				20	1	36	
37	2	20	VAV-9-8	#12	1KW	A			↓	20	1	38	
39	2	20	VAV-9-9	#12	1KW	B		SEE RISER	NEW 45 KVA XFMR	60	3	40	
41						C						42	
REMARKS: 1. PROVIDE WITH HINGED LOCKABLE COVER.												PANEL CONNECTED 50 KW	
												XFMR CONNECTED 20 KW	
												TOTAL 70 KW	

PANEL_USPA				TYPE I-LINE			MAINS CU. 400		AMPERES			
65 K.A.I.C MIN. RATING				VOLTAGE 120/208V, 3Ø, 4W & GND								
M.L.O. ✓				FEEDER					SEE RISER			
C C R C I T	P O W E R	T R P	ASSIGNMENT	AC OR MC CABLE MIN. #12 GA. THHN CU. WIRE	LOAD WATTS	P H A S E	LOAD WATTS	AC OR MC CABLE MIN. #12 GA. THHN CU. WIRE	ASSIGNMENT	T R P	P O W E R	C C R C I T
1						A						2
3	3	200	PANEL USPB	SEE RISER	56KW	B		SEE RISER	TVSS LEVITON # P3120-YB	20	3	4
5						C						6
7						A						8
9	3	125	PANEL USPC	SEE RISER	31KW	B	20KW	SEE RISER	PANEL LT/LT1 (REFEED EXISTING)	200	3	10
11						C						12
13						A						14
15	3	100	FITNESS PANEL F1	SEE RISER	13KW	B	12KW	SEE RISER	PANEL CP	100	3	16
17						C						18
19			BLANK BUS FOR 100A CB			A						20
21						B	5KW	SEE RISER	INNOVATION LAB 108 BUS	100	3	22
23						C						24
REMARKS: 1. PROVIDE WITH HINGED LOCKABLE COVER.									CU. GROUND BUS CONNECTED LOAD 122_KW			

PANEL_USPB (FIRST FLOOR LOADS)						TYPE SURFACE		MAINS CU. 200		AMPERES				
10 K.A.I.C MIN. RATING						VOLTAGE 120/208V, 3ø, 4W & GND								
M.L.O. ✓						FEEDER		SEE RISER						
C C R C I T	P O W E R	T R P	ASSIGNMENT	O U T L E T S	AC OR MC CABLE MIN. #12 GA. THHN CU. WIRE	LOAD WATTS	P H A S E	LOAD WATTS	AC OR MC CABLE MIN. #12 GA. THHN CU. WIRE	O U T L E T S	ASSIGNMENT	T R P	P O W E R	C C R C I T
1	1	20	STUDENT COMMONS 102 FLOOR BOXES	4	#12	600W	A	1000W	#10	1	STUDENTS COMMONS 102 PROJECTOR	20	1	2
3	1	20	STUDENT COMMONS 102 EVENT REC	1	#12	180W	B	180W	#12	1	STUDENTS COMMONS 102 EVENT REC	20	1	4
5	1	20	STUDENT COMMONS 102 COUNTER REC	3	#12	540W	C	540W	#12	3	STUDENTS COMMONS 102 COUNTER REC	20	1	6
7	1	20	GAS FIREPLACE POWER	1	#12	300W	A	360W	#12	2	RECEPTION 103 REC	20	1	8
9	1	20	RECEPTION 103 REC	1	#12	180W	B	540W	#12	3	CRI GALLERY FLOOR BOXES	20	1	10
11	1	20	ADMISSIONS 104 REC	3	#12	600W	C	600W	#12	1	ELECTRIC WATER COOLER	20	1	12
13	1	20	INNOVATION LAB 108 REC	3	#12	600W	A	1000W	#10	1	INNOVATION LAB 108	20	1	14
15	1	20	OFFICE 111 REC	3	#12	420W	B	300W	#12	1	STORAGE/IT/MECH	20	1	16
17	1	20	CLASSROOM 112 MONITOR	1	#10	600W	C	300W	#12	1	STORAGE/IT/MECH	20	1	18
19	1	20	INNOVATION LAB 108 MONITOR		#10	1000W	A	300W	#12	1	STORAGE/IT/MECH	20	1	20
21	1	20	ROOM 112 & 113 CONV. REC	3	#12	540W	B	300W	#12	1	STORAGE/IT/MECH	20	1	22
23	1	20	CLASSROOM 112 FLOOR BOX	2	#12	600W	C	600W	#12	1	COLLABORATION ROOM MONITOR	20	1	24
25	1	20	COLLABORATION ROOM 113 REC	2	#12	360W	A	180W	#12	1	PIT REC	20	1	26
27	1	20	STORAGE/IT/MECH 109 REF	1	#12	600W	B	600W	#12	1	ELEV. SUMP PUMP	20	1	28
29	1	20	STUDENT COMMONS FLOOR REC	2	#12	600W	C	600W	#12	4	IT CLOSET 118, STORAGE 119, MECH/ELEC RM 120 REC	20	1	30
31	1	20	STUDENT COMMONS REC	2	#12	360W	A	150W	#12	1	MOTORIZED DAMPER	20	1	32
33	1	20	STUDENT COMMONS REC	2	#12	360W	B	563W	#12	14	EXTERIOR SITE LTG	20	1	34
35	1	20	LOCKER ROOM 121	2	#12	360W	C	839W	#12	1	LOCKER FOR ROOMS 115, 116, 117, 118, 119, 120, 121, 122	20	1	36
37	1	20	LOCKER ROOM 122	2	#12	360W	A							38
39	1	20	CAFE 1 POS SYSTEM	1	#12	300W	B	34KW	SEE RISER		PANEL_USPB1	150	3	40
41	1	20	OFFICE 111 REC	1	#12	180W	C							42
REMARKS: 1. PROVIDE WITH HINGED LOCKABLE COVER.										CU. GROUND BUS CONNECTED LOAD 56 KW				


T:\Tolnorth\2023\2302 KING SCHOOL-UPPER SCHOOL CR1+COMMONS ADDITION PROJECT\2302 E-107 LIGHT FIXTURE SCHEDULE.dwg, 8/20/2025 5:05:26 PM, ARCH full bleed D (36.00 x 24.00 inches), F.G.

LIGHTING FIXTURE SCHEDULE							
FIXTURE TYPE	SYMBOL	DESCRIPTION	MFG. CATALOG NO.	LAMP DATA INFO.	VOLTAGE	MOUNTING	REMARKS
		POLE MOUNT SINGLE FIXTURE	SELUX DISCERRA4# DSC4L-R1-S1-5G700-30K-FINISH-UNV-MOUNTED@12"HT	LED, 3000K, 62W, 6325LM	120V	POLE MOUNTED	- POLE FOUNDATION PRE CASTED OR POURED - PROVIDE GFIC RECEPTACLE (REC2) WHERE INDICATED
		LIGHT BOLLARD	SELUX: NOTCH BOLLARD LED# NT-3-LG4700-30-FINISH-REC3	LED, 3000K, 14W, 676LM	120V	POLE MOUNTED	- POLE FOUNDATION PRE CASTED OR POURED - PROVIDE GFIC RECEPTACLE (REC2) WHERE INDICATED
		UPLIGHT FIXTURE	BK LIGHTING: DS-LED-E65-MFL-BLP	LED, 3000K, 7W, 406LM	120V	UPLIGHT	- PROVIDE RECESSED BACKBOX - PROVIDE GFIC RECEPTACLE (REC2) WHERE INDICATED
		ARM MOUNT LIGHT COLUMN	SELUX: OLIVO MEDIO LED SISTEMA 2-OLML-F80-2G700-35*-FINISH-120V MOUNTING DETAILS: QUADRUPLE POLE ARMS STEPPED	LED, 3500K, 124W, 2361LM/ARM	120V	POLE MOUNTED	- POLE FOUNDATION PRE CASTED OR POURED
		WALL MOUNT FIXTURE	SELUX DISCERRA4# DSC4L-R1-S1-5G700-30K-FINISH-UNV-WALL MOUNTED	LED, 3500K, 31W, 2631LM	120V	WALL	- PROVIDE RECESSED BACKBOX - PROVIDE GFIC RECEPTACLE (REC2) WHERE INDICATED
		UTILITY LIGHT	LSI LIGHTING # SDL4-LED-40-FL-UNV-35-80CRI-STANDARD	LED, 3500K, 30W, 4000LM, 80CRI	120V	SURFACE	
		ELEVATOR SHAFT LIGHT	LSI LIGHTING # EGA-SL-SA-UNV-840	LED, 4000K, 36W, 5000LM	120V	SURFACE	
		DOWNLIGHT	BEGA LIGHTING - B24136	LED, 2000K, 16.8W, 1749LM	120V	RECESSED	- PROVIDE RECESSED BACKBOX.
EXIT		EDGE LIT LED, BATTERY BACKBOX	ATLITE MARATHON	LED AS SUPPLIED	120V		
EMERG		4" ROUND RECESSED EMT FIXTURE WITH BATTERY BACK	EXITRONIX	LED AS SUPPLIED	120V	RECESSED	
NOTES 1. LED FIXTURES SHALL BE LM70 MINIMUM RATED, 50,000 HOURS MINIMUM. 2. SUBMIT D.O.E. LIGHTING FACT SHEET FOR ALL FIXTURES 3. PROVIDE FIXTURES WITH NECESSARY TRIM & ACCESSORIES REQUIRED FOR A COMPLETE INSTALLATION. 4. EXACT LOCATION OF FIXTURES SHALL BE DETERMINED BY ARCHITECTURAL REFLECTED CEILING PLAN AND APPROVED SHOP DRAWINGS. VERIFY CEILING TYPES, PRIOR TO SUBMITTING FIXTURES. 5. COLOR & FINISHES SHALL BE AS SELECTED BY ARCHITECT. 6. FOR EACH PENDANT FIXTURE, CONTRACTOR SHALL PROVIDE AT LEAST ONE ADDITIONAL FIELD INSTALLED SUPPORT, ANTI-ROTATION/SWING CABLE, INDEPENDENTLY ATTACHED TO THE FIXTURE AND BUILDING STRUCTURE. SUBMIT METHOD AND MATERIALS FOR APPROVAL. PROVIDE ADDITIONAL WHERE INDICATED OR REQUIRED.							

PANEL USDP			TYPE I-LINE			MAINS CU. 600			AMPERES			
65 K.A.I.C MIN. RATING			VOLTAGE 480/277V, 3Ø, 4W & GND									
MAIN 600A			FEEDER			SEE RISER						
C C O U N T	P O S I T I O N	T R I P	ASSIGNMENT	AC OR MC CABLE MIN. #12 GA. THHN CU. WIRE	LOAD WATTS	P H A S E	LOAD WATTS	AC OR MC CABLE MIN. #12 GA. THHN CU. WIRE	ASSIGNMENT	T R I P	P O S I T I O N	C O U N T
1						A						2
3	3	300	PANEL HT	SEE RISER	120KW	B		#12	TVSS LEVITON # M3277-YB	20	3	4
5						C						6
7						A						8
9	3	400	PANEL USPA VIA TRANSFORMER	SEE RISER	75KW	B	12KW		ELEVATOR (SHUNT TRIP)	40	3	10
11						C						12
13						A						14
15						B						16
17						C						18
19						A						20
21						B						22
23						C						24
REMARKS: 1. PROVIDE WITH HINGED LOCKABLE COVER.									CU. GROUND BUS CONNECTED LOAD 207 KW			

PANEL HT (NEW) TYPE I-LINE MAINS CU. 400 AMPERES												
FED BY 300A CB IN USDP 65 K.A.I.C MIN. RATING VOLTAGE 480/277V, 3Ø, 4W & GND												
M.L.O. ✓ FEEDER SEE RISER												
C C O U N T	P O S I T I O N	T R I P	ASSIGNMENT	AC OR MC CABLE MIN. #12 GA. THHN CU. WIRE	LOAD WATTS	P H A S E	LOAD WATTS	AC OR MC CABLE MIN. #12 GA. THHN CU. WIRE	ASSIGNMENT	T R I P	P O S I T I O N	C O U N T
1						A						2
3	3	45	RTU#1	#6	21KW	B	7.5KW	#8	DOAS-1	20	3	4
5						C						6
7						A	750W	#10	EF#4	20	1	8
9	3	30	RTU#2	#8	14KW	B	750W	#10	EF#6&7	20	2	10
11						C						12
13						A	500W	#12	EF#5	20	2	14
15	3	30	RTU#3	#8	13KW	B						16
17						C			SPARE			18
19	2	20	HP-3	#10	1.8KW	A						20
21						B						22
23	1	20	EF#3	#12	350W	C						24
25						A						26
27	3	50	HP-1-A	#6	22KW	B						28
29						C						30
31						A						32
33	3	50	HP-1-B	#6	22KW	B						34
35						C						36
37						A						38
39	3	40	HP-2	#6	19KW	B						40
41						C						42
REMARKS: 1. PROVIDE WITH HINGED LOCKABLE COVER.												
CU. GROUND BUS CONNECTED LOAD 122 KW												

LIGHT FIXTURE SCHEDULE							
TYPE	DESCRIPTION	MANUFACTURER	LAMP	WATTS	CONTROL TYPE	VOLTS	REMARKS
G1	CABLE SUSPENDED DIRECT/INDIRECT LED RING PENDANT, 24"DIA, 1.5"W X 3.5"H WITH EXTRUDED ALUMINUM HOUSING, LAMBERTIAN DISTRIBUTION, EXTRA DIFFUSED ACRYLIC LENS, ALUMINUM SILVER FINISH, AND REMOTE 0-10V 1% DIMMING DRIVER. 8" SIDE SHALL BE TALL.	ALW MOON RING 1.5 MR1.5/TS-D2-SS-MED-80-3000K-V01-LENS-AS-UNV	LED 3000K 6350 LM 80 CRI	94	0-10V	120 (EE TO VERIFY)	MOUNTING HEIGHT AT 19'-0" DRIVER TO BE PLACED IN DRY, EASILY ACCESSIBLE LOCATION.
G2	CABLE SUSPENDED DIRECT/INDIRECT LED RING PENDANT, 48"DIA, 1.5"W X 3.5"H WITH EXTRUDED ALUMINUM HOUSING, LAMBERTIAN DISTRIBUTION, EXTRA DIFFUSED ACRYLIC LENS, ALUMINUM SILVER FINISH, AND REMOTE 0-10V 1% DIMMING DRIVER. "A" SIDE SHALL BE TALL.	ALW MOON RING 1.5 MR1.5/ST-D4-SS-MED-80-3000K-V01-LENS-MED-80-3000K-V01-LENS-AS-UNV	LED 3000K 12750 LM 80 CRI	194	0-10V	120 (EE TO VERIFY)	MOUNTING HEIGHT AT 19'-9" DRIVER TO BE PLACED IN DRY, EASILY ACCESSIBLE LOCATION.
G3	CABLE SUSPENDED DIRECT/INDIRECT LED RING PENDANT, 72"DIA, 1.5"W X 1.75"H WITH EXTRUDED ALUMINUM HOUSING, LAMBERTIAN DISTRIBUTION, EXTRA DIFFUSED ACRYLIC LENS, BRUSHED ALUMINUM FINISH, AND REMOTE 0-10V 1% DIMMING DRIVER.	ALW MOON RING 1.5 MR1.5-D6-SS-MED-80-3000K-V01-LENS-MED-80-3000K-V01-LENS-BA-UNV	LED 3000K 19100 LM 80 CRI	294	0-10V	120 (EE TO VERIFY)	MOUNTING HEIGHT AT 20'-6" FIXTURE TO BE CONTROLLED SEPARATELY FROM TYPES G1 AND G2. DRIVER TO BE PLACED IN DRY, EASILY ACCESSIBLE LOCATION.
G4	RECESSED LED DOWNLIGHT, 3.5"DIA. X 3.16"H WITH VERY WIDE FLOOD DISTRIBUTION, ALUMINUM REFLECTOR PARABOLIC REFLECTOR CONE, 50DEG. CUT-OFF, CLEAR DIFFUSE REFLECTOR AND FLANGE FINISH, AND INTEGRAL 0-10V 1% DIMMING DRIVER.	FOCAL POINT ID+ 3.5" FLC3D-RQ-SW-1100L-UNV-L11-T-BH, LC3-RQ-SW-1100L-30K-DNT-VWFL-CD	LED 3000K 1112 LM 80 CRI	12	0-10V	120 (EE TO VERIFY)	STUDENT COMMONS CORRIDOR
G5	ARM MOUNTED ROTATABLE WALL WASH, 18"DIA. X 5' - 0" L WITH EXTRUDED ALUMINUM HOUSING, ASYMMETRIC DISTRIBUTION, 18"L STEEL ARMS, FROSTED EXTRUDED ACRYLIC LENS, SATIN SILVER FINISH, AND INTEGRAL 0-10V 1% DIMMING DRIVER.	BARTCO LIGHTING BSS501-61-30-D-R-A-18-WBR-SNISTAD/TR (AS REQUIRED) -ESS	LED 3000K 2,675 LM 90 CRI	28	0-10V	120 (EE TO VERIFY)	PIN UP WALLS
G5A	SIMILAR TO TYPE G5 EXCEPT FIXTURE SHALL BE 7' - 0" LONG.	BARTCO LIGHTING BSS501-83-30-D-R-A-18-WBR-SNISTAD/TR (AS REQUIRED) -ESS	LED 3000K 3,745 LM 90 CRI	39.2	0-10V	120 (EE TO VERIFY)	PIN UP WALLS
G5B	SIMILAR TO TYPE G5 EXCEPT FIXTURE SHALL BE 8' - 0" LONG.	BARTCO LIGHTING BSS501-94-30-D-R-A-18-WBR-SNISTAD/TR (AS REQUIRED) -ESS	LED 3000K 4,280 LM 90 CRI	44.8	0-10V	120 (EE TO VERIFY)	STUDENT COMMONS
G6	RECESSED RECTANGULAR SHAPED LENSED SLOT, 3.5"W APERTURE X LENGTH AND PATTERN AS PER DRAWING WITH EXTRUDED ALUMINUM HOUSING, LAMBERTIAN DISTRIBUTION, SATIN ACRYLIC LENS, WHITE FINISH AND INTEGRAL 0-10V 1% DIMMING DRIVER.	MARK LIGHTING SL4L-LOP-4FT FLP-FL-80CRI-30K-400LMF-MIN1-120-ZT-(4) 90DEG. CORNERS	LED 3000K 400 LMF 80 CRI	4W/ LF	0-10V	120 (EE TO VERIFY)	INNOVATION LAB
G7/4	SIMILAR TO TYPE G6 EXCEPT FOR FIXTURE LENGTH.	MARK LIGHTING SL4L-LOP-4FT FLP-FL-80CRI-30K-400LMF-MIN1-120-ZT	LED 3000K 400 LMF 80 CRI	4W/ LF	0-10V	120 (EE TO VERIFY)	WITH (1) 4FT EM SECTION WIRED TO INV
G7/8	SIMILAR TO TYPE G6 EXCEPT FOR FIXTURE LENGTH.	MARK LIGHTING SL4L-LOP-8FT FLP-FL-80CRI-30K-400LMF-MIN1-120-ZT	LED 3000K 400 LMF 80 CRI	4W/ LF	0-10V	120 (EE TO VERIFY)	WITH (1) 4FT EM SECTION WIRED TO INV
G7/12	SIMILAR TO TYPE G6 EXCEPT FOR FIXTURE LENGTH.	MARK LIGHTING SL4L-LOP-12FT FLP-FL-80CRI-30K-400LMF-MIN1-120-ZT	LED 3000K 400 LMF 80 CRI	4W/ LF	0-10V	120 (EE TO VERIFY)	WITH (1) 4FT EM SECTION WIRED TO INV
G8	WALL MOUNTED LENSED LINEAR, 3.5"W X 25'-0" WITH EXTRUDED ALUMINUM HOUSING, LAMBERTIAN DISTRIBUTION, REGRESSED LOUVER, WHITE FINISH, AND INTEGRAL 0-10V 1% DIMMING DRIVER.	MARK LIGHTING S4WD-LSL-25FT-MSLS-80CRI-30K-300LMF-SCT-MIN1-LVRR-120-WHITT-ZT	LED 3000K 300 LMF 80 CRI	2.39 W/ LF	0-10V	120 (EE TO VERIFY)	INNOVATION LAB
G9	2X2 EDGE LIT PANEL, 24"L X 2"W X 2"H WITH ALUMINUM BEZEL TRIM, STEEL BACK PLATE, WHITE FROST LENS, WHITE FINISH, AND INTEGRAL 0-10V 10% DIMMING DRIVER.	METALUX 22FP2130C	LED 3000K 2318LM 80 CRI	20.7	0-10V	120 (EE TO VERIFY)	FITNESS
G10	SURFACE CEILING MOUNTED LED DOWNLIGHT, 5.2"L X 5.2"W X 6.1"H WITH STEEL HOUSING, 60DEG. BEAM SPREAD, BLACK FINISH, SOFT FOCUS LENS, AND INTEGRAL 0-10V DRIVER.	TECH LIGHTING 700FMEX0-6-60-B-B-LED930-SF-B	LED 3000K 1047LM 90 CRI	14	0-10V	120 (EE TO VERIFY)	TERRACE
G11	LARGE SCALE DECORATIVE PENDANT COMPRISED OF INDIVIDUAL 2" X 2" LED CUBE PENDANTS IN GALAXY FORM. INDIVIDUAL CUBES ARE 2" SQUARE WITH FROSTED ACRYLIC SUSPENSION LENGTHS TO BE COORDINATED WITH MANUFACTURER. (4) RECTANGULAR CANOPIES SHALL BE SURFACE CEILING MOUNTED. FINISH TO BE DETERMINED. 0-10V DIMMING DRIVERS SHALL BE LOCATED IN CANOPY.	GRAYPANTS GA-X-CB-30-X-SP-RC-SM-CU (SILVER FINISH)-ST	LED 3000K XLM 80 CRI	X	0-10V	120 (EE TO VERIFY)	CAFE RECEPTION LEVEL 2 CORRIDOR
G12	RECESSED RECTANGULAR SHAPED LENSED SLOT, 1"W APERTURE X 60' - 0"L WITH STEEL UPPER HOUSING, EXTRUDED ALUMINUM CEILING TRIM, ASYMMETRIC DISTRIBUTION, SATIN ACRYLIC FLUSH LENS, WHITE FINISH AND INTEGRAL 0-10V 1% DIMMING DRIVER.	MARK SLOT 1 SFPCL-LOP-60FT-FLP-FL-90-30K-600LMF-DAS-SCT-MIN1-RL-MVOLT-WHITT-ZT	LED 3000K 600 LMF 90 CRI	6 W/LF	0-10V	120 (EE TO VERIFY)	LEVEL 2 CORRIDOR
G13	SURFACE MOUNTED LED NEON, 1"W X 1/2"H X LENGTHS PER DRAWING WITH LOW PROFILE MOUNTING CLIPS, IP67 RATED, ENCAPSULATED IN TRANSLUCENT LENS, AND REMOTE 0-10V DRIVER.	QTRAN Q-CAP ZALA-SW-PPS-IP-2-WET-30-3-ENC/TL-S1-BW-CL-FIXTURE LENGTH TO BE DETERMINED-O	LED 3000K 153 LMF 97 CRI	3 W/LF	0-10V	120 (EE TO VERIFY)	EXTERIOR SIGNAGE
GOLDSTICK STUDIO KING SCHOOL 12.19.2023							
1.LED FIXTURES SHALL BE LM70 MINIMUM RATED, 50,000 HOURS MINIMUM. 2.SUBMIT D.O.E. LIGHTING FACT SHEET FOR ALL FIXTURES 3.PROVIDE FIXTURES WITH NECESSARY TRIM & ACCESSORIES REQUIRED FOR A COMPLETE INSTALLATION. 4.EXACT LOCATION OF FIXTURES SHALL BE DETERMINED BY ARCHITECTURAL REFLECTED CEILING PLAN AND APPROVED SHOP DRAWINGS. VERIFY CEILING TYPES, PRIOR TO SUBMITTING FIXTURES. 5.COLOR & FINISHES SHALL BE AS SELECTED BY ARCHITECT. 6.FOR EACH PENDANT FIXTURE, CONTRACTOR SHALL PROVIDE AT LEAST ONE ADDITIONAL FIELD INSTALLED SUPPORT, ANTI-ROTATION/SWING CABLE, INDEPENDENTLY ATTACHED TO THE FIXTURE AND BUILDING STRUCTURE. SUBMIT METHOD AND MATERIALS FOR APPROVAL. PROVIDE ADDITIONAL WHERE INDICATED OR REQUIRED.							

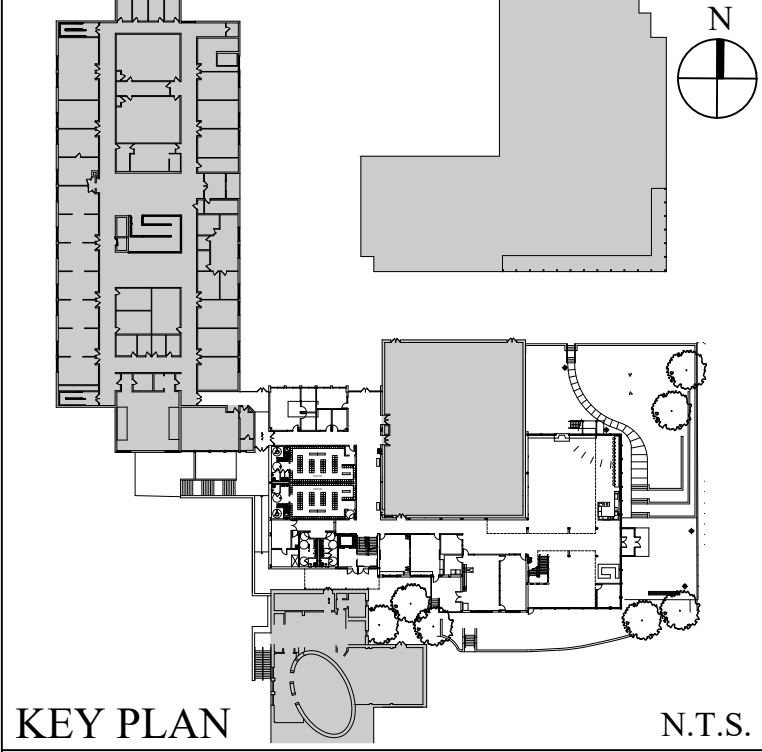

KEY PLAN N.T.S.

5.		
4.	06/30/2025	100% CD COMPLETE
3.	03/12/2025	50% CD COMPLETE - ADDENDUM 2
2.	02/18/2025	50% CD COMPLETE - ADDENDUM 1
1.	02/07/2025	50% CD COMPLETE - ISSUED FOR CD ESTIMATE
No.	Date	Revision
ARCHITECT PETER GISOLFI ASSOCIATES, LLP 566 WARBURTON AVENUE HAUSTINGS-ON-HUDSON, NY 10706 T: (914) 478-3677		
STRUCTURAL ENGINEER DRPILLA CONSULTING ENGINEERS 143 MAIN STREET NYACK, NY 10960 T: (845) 727-7793		
MEP ENGINEERS WATSON ASSOCIATES 68 PURCHASE STREET ROYE, NY 10580 T: (914) 948-3450		
ROOFING CONSULTANT WATSON ASSOCIATES 20 MADISON AVENUE VALHALLA, NY 10595 T: (914) 948-3450		
CODE CONSULTANT BILLYTREGORY GROW, AIA 241 MAIN STREET SOUTH WOODBURY, CT 06798 T: (203) 215-1074		
SPECIFICATIONS CONSTRUCTION SPECIFICATIONS INC. PO BOX 488 MORGANTVILLE, NJ 07571 T: (732) 978-0700		
GEOTECHNICAL ENGINEER (BY OWNER) LANGAN CT, INC. 355 LONG WHARF DRIVE NEW HAVEN, CT 06595 (203) 962-5771		
CIVIL ENGINEER (BY OWNER) REDNESS AND MEAD 22 FIRST STREET STAMFORD, CT 06905 (203) 327-6500		

Stamp

Project Title
KING SCHOOL
UPPER SCHOOL
CR1/COMMONS
ADDITION PROJECT
1450 Newfield Avenue
Stamford, CT 06905

Drawing Title
ELECTRICAL-LIGHTING
LIGHT FIXTURE SCHEDULE

Scale	Job No.	Date	Drawing No.
	2301.00	02/2025	E-107
Drawn	Checked	Approved	

Peter Gisolfi Associates
Architects + Landscape Architects, LLP
566 Warburton Avenue
Hastings on Hudson, NY 10706
(914) 478-3677
PETER GISOLFI ASSOCIATES LLP

PROGRESS PRINT
NOT FOR CONSTRUCTION
08/20/25

T:\Tolnorth\2023\2302 KING SCHOOL UPPER SCHOOL CRTH+COMMONS ADDITION PROJECT\2302 E-108 UPPER SCHOOL-LIGHTING CONTROL CHART SCHEDULE.dwg, 8/20/2025 5:05:02 PM, ARCH full bleed D (36.00 x 24.00 inches), F.G.

KING SCHOOL UPPER SCHOOL LIGHTING CONTROL CHART SCHEDULE																									
ROOM		TYPE	ZONE	MANUAL ON/OFF SWITCHING	MANUAL DIMMING	SCENE SELECTOR CONTROL	OCCUPANCY SENSOR	VACANCY SENSOR	DAYLIGHT DIMMING	TIMER OFF (INTERLOCK)	ASTRONOMIC TIMER ON/OFF	WALL OCC SENSOR (SMALL RM)	ZONE QUANTITY	FIXTURE WATTAGE	ZONE WATTS	EM QUANTITY	PANEL CIRCUIT NUMBER	DIAGRAM	CIRCUITRY PLUS						
100	VESTIBULE	Ⓔ		X	X	X							4	12W	48W	4	USPB1-41	DIAGRAM 2 & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE						
102	STUDENT COMMONS	Ⓔ	c	X	X	X		X					5	94W	470W	0	USPB-36	DIAGRAM 1	(2)#12, #12 GND, THWN, CU MC CABLE						
		Ⓔ	c	X	X	X		X					1	294W	294W	0	USPC-36	DIAGRAM 1 & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE						
		Ⓔ	d	X	X	X							7	94W	658W	2	USPC-36	DIAGRAM 2	(2)#12, #12 GND, THWN, CU MC CABLE						
		Ⓔ	d	X	X	X							4	194W	776W	0	USPC-40	DIAGRAM 2	(2)#12, #12 GND, THWN, CU MC CABLE						
		Ⓔ	d	X	X	X							3	294W	882W	0	USPC-42	DIAGRAM 2	(2)#12, #12 GND, THWN, CU MC CABLE						
101/103/106	CAFE/RECEPCION/ CRI DISPLAY PRESENTATION HALL	Ⓔ	a	X	X	X							47	12W	564W	8	USPB1-41 MANUAL DIMMER W/ TIME CLOCK & DIAGRAM 7		(2)#12, #12 GND, THWN, CU MC CABLE						
		Ⓔ	b	X	X	X							2	39.2W	78.4W	0	USPB1-41	MANUAL DIMMER	(2)#12, #12 GND, THWN, CU MC CABLE						
		Ⓔ	b	X	X	X							4	44.8W	179.2W	0	USPB1-41	MANUAL DIMMER	(2)#12, #12 GND, THWN, CU MC CABLE						
		Ⓔ	c	X	X	X							2			0	USPB1-42	MANUAL DIMMER W/ TIME CLOCK	(2)#12, #12 GND, THWN, CU MC CABLE						
104	ADMISSIONS	Ⓔ		X	X	X	X						4	12W	48W	0	USPB1-42	DIAGRAM 3	(2)#12, #12 GND, THWN, CU MC CABLE						
105	CRI GALLERY	Ⓔ	b	X	X	X							3	94W	282W	2	USPC-44	DIAGRAM 2 & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE						
		Ⓔ	b	X	X	X							3	194W	582W	1	USPC-44	DIAGRAM 2 & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE						
		Ⓔ	b	X	X	X							1	294W	294W	0	USPC-46	DIAGRAM 2	(2)#12, #12 GND, THWN, CU MC CABLE						
105	CRI GALLERY	Ⓔ	a	X	X	X		X					2	94W	188W	0	USPC-46	DIAGRAM 1	(2)#12, #12 GND, THWN, CU MC CABLE						
		Ⓔ	a	X	X	X		X					1	194W	194W	0	USPC-46	DIAGRAM 1	(2)#12, #12 GND, THWN, CU MC CABLE						
		Ⓔ	a	X	X	X		X					2	294W	588W	0	USPC-46	DIAGRAM 1	(2)#12, #12 GND, THWN, CU MC CABLE						
108	INNOVATION LAB	Ⓔ	b	X	X	X							8	12W	96W	2	USPB1-40	DIAGRAM 2	(2)#12, #12 GND, THWN, CU MC CABLE						
		Ⓔ	a	X	X	X							3	20.7W	62.1W	1	USPB1-40	DIAGRAM 2	(2)#12, #12 GND, THWN, CU MC CABLE						
		Ⓔ	d	X	X	X							5	4FT@ 4W/ FT	80W	0	USPB1-40	DIAGRAM 2	(2)#12, #12 GND, THWN, CU MC CABLE						
		Ⓔ	c	X	X	X							18	4FT@ 2.39W/ FT	172.08W	0	USPB1-40	DIAGRAM 2	(2)#12, #12 GND, THWN, CU MC CABLE						
109	STORAGE/IT/MECH	Ⓔ		X									2	20.7W	41.4W	0	USPB1-36	DIAGRAM 4	(2)#12, #12 GND, THWN, CU MC CABLE						
110/130	CORRIDOR/ TROPHY HALL	Ⓔ	a	X	X	X	X						24	12W	288W	10	USPB1-36	DIAGRAM 3 & DIAGRAM 7 W/ TIME CLOCK	(2)#12, #12 GND, THWN, CU MC CABLE						
		D	b	X									1	8FT@ 4FT/ LF	32W	0	USPB1-39	MANUAL SWITCH	(2)#12, #12 GND, THWN, CU MC CABLE						
		D	c	X									1	8FT@ 4FT/ LF	32W	0	USPB1-39	MANUAL SWITCH	(2)#12, #12 GND, THWN, CU MC CABLE						
		D	d	X									1	32FT@ 4FT/ LF	128W	0	USPB1-39	MANUAL SWITCH	(2)#12, #12 GND, THWN, CU MC CABLE						
		D	F	X									1	40FT@ 4FT/ LF	160W	0	USPB1-39	MANUAL SWITCH	(2)#12, #12 GND, THWN, CU MC CABLE						
		D	G	X									1	40FT@ 4FT/ LF	160W	0	USPB1-39	MANUAL SWITCH	(2)#12, #12 GND, THWN, CU MC CABLE						
111	OFFICE	Ⓔ		X			X						2	4FT@ 4W/ LF	32W	1	USPB1-38	DIAGRAM 4 & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE						
112	CLASSROOM	Ⓔ		X	X	X		X					6	8FT@ 4W/ LF	192W	(1)W/ 4FT SEC	USPB1-38	DIAGRAM 3 & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE						
113	COLLABORATION RM	Ⓔ		X	X	X		X					6	8FT@ 4W/ LF	192W	(1)W/ 4FT SEC	USPB1-38	DIAGRAM 3 & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE						
114	VESTIBULE / STAIR B	Ⓔ					X						4	12W	48W	2	USPB1-39	OCCUPANCY SENSOR & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE						
115	TOILET VESTIBULE	Ⓔ					X						4	20.7W	82.8W	0	USPB-36	OCCUPANCY SENSOR	(2)#12, #12 GND, THWN, CU MC CABLE						
116	WOMEN TOILET	Ⓔ		X			X						2	20.7W	41.4W	0	USPB-36	DIAGRAM 4	(2)#12, #12 GND, THWN, CU MC CABLE						
117	MENS TOILET	Ⓔ		X			X						2	20.7W	41.4W	0	USPB-36	DIAGRAM 4	(2)#12, #12 GND, THWN, CU MC CABLE						
118	JAN. CLOSET	Ⓔ		X									1	30W	30W	0	USPB-36	MANUAL SWITCHING	(2)#12, #12 GND, THWN, CU MC CABLE						
119	ATHLETICS STORAGE	Ⓔ		X			X						3	20.7W	62.1W	0	USPB-36	DIAGRAM 4	(2)#12, #12 GND, THWN, CU MC CABLE						
120	MECH / ELEC RM	Ⓔ		X			X						3	30W	90W	0	USPB-36	DIAGRAM 4	(2)#12, #12 GND, THWN, CU MC CABLE						
	MS CANOPY	Ⓔ								X			10	14W	140W	5	USPB1-14	ASTRONOMIC TIMER	(2)#12, #12 GND, THWN, CU MC CABLE						
	STAIRWELL	Ⓔ								X			8	46W	368W	8	USPB1-14	ASTRONOMIC TIMER	(2)#12, #12 GND, THWN, CU MC CABLE						

KING SCHOOL UPPER SCHOOL LIGHTING CONTROL CHART SCHEDULE																						
ROOM			TYPE	ZONE	MANUAL ON/OFF SWITCHING	MANUAL DIMMING	SCENE SELECTOR CONTROL	OCCUPANCY SENSOR	VACANCY SENSOR	DAYLIGHT DIMMING	TIMER OFF (INTERLOCK)	ASTRONOMIC TIMER ON/OFF	WALL OCC SENSOR (SMALL RM)	ZONE QUANTITY	FIXTURE WATTAGE	ZONE WATTS	EM QUANTITY	PANEL CIRCUIT NUMBER	DIAGRAM	CIRCUITRY PLUS		
121	LOCKER ROOM	Ⓔ	a	X			X							1	12W	12W	0	USPB-36	DIAGRAM 4	(2)#12, #12 GND, THWN, CU MC CABLE		
		Ⓔ	b	X										2	12W	24W	0	USPB-36	MANUAL SWITCH	(2)#12, #12 GND, THWN, CU MC CABLE		
		Ⓔ	a	X			X							10	20.7W	207W	0	USPB-36	DIAGRAM 4	(2)#12, #12 GND, THWN, CU MC CABLE		
122	LOCKER ROOM	Ⓔ	a	X			X							1	12W	12W	0	USPB-36	DIAGRAM 4	(2)#12, #12 GND, THWN, CU MC CABLE		
		Ⓔ	b	X										2	12W	24W	0	USPB-36	MANUAL SWITCH	(2)#12, #12 GND, THWN, CU MC CABLE		
		Ⓔ	a	X			X							10	20.7W	207W	0	USPB-36	DIAGRAM 4	(2)#12, #12 GND, THWN, CU MC CABLE		
124	ATHLETIC'S OFFICE	Ⓔ		X	X			X						2	4FT@ 4W/ LF	32W	0	USPB1-37	DIAGRAM 3	(2)#12, #12 GND, THWN, CU MC CABLE		
125	ATHLETIC'S OFFICE	Ⓔ		X	X	X		X						8	4FT@ 4W/ LF	128W	0	USPB1-37	DIAGRAM 3	(2)#12, #12 GND, THWN, CU MC CABLE		
126	OFFICE	Ⓔ		X	X			X						4	4FT@ 4W/ LF	64W	0	USPB1-37	DIAGRAM 3	(2)#12, #12 GND, THWN, CU MC CABLE		
127	ATHLETIC TRAINERS	Ⓔ		X			X							2	4FT@ 4W/ LF	32W	0	USPB1-37	DIAGRAM 4	(2)#12, #12 GND, THWN, CU MC CABLE		
128	ATHLETIC TRAINERS	Ⓔ		X			X							2	4FT@ 4W/ LF	32W	0	USPB1-37	DIAGRAM 4	(2)#12, #12 GND, THWN, CU MC CABLE		
129	STORAGE	Ⓔ		X										2	4FT@ 4W/ LF	32W	0	USPB1-37	MANUAL SWITCH	(2)#12, #12 GND, THWN, CU MC CABLE		
200	ROOF TERRACE	Ⓔ	a	X	X	X					X			3	16.8W	51.2W	0	USPB1-14	DIAGRAM 2	(2)#12, #12 GND, THWN, CU MC CABLE		
		Ⓔ	b	X	X	X					X			2	46W	92W	2	USPB1-14	DIAGRAM 2 & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE		
202	HEAD OF SCHOOL	Ⓔ	b	X	X	X		X						1	94W	94W	0	USPC-39	DIAGRAM 3	(2)#12, #12 GND, THWN, CU MC CABLE		
		Ⓔ	c	X	X	X		X						7	12W	84W	0	USPC-39	DIAGRAM 3	(2)#12, #12 GND, THWN, CU MC CABLE		
		Ⓔ	a	X	X	X		X						3	8FT@ 4FT/ LF	96W	(1)W/ 4FT EM SEC	USPC-39	DIAGRAM 3 & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE		
203	ADMIN	Ⓔ		X	X	X	X							2	8FT@ 4FT/ LF	64W	(1)W/ 4FT EM SEC	USPC-39	DIAGRAM 4 & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE		
204	CONFERENCE ROOM	Ⓔ	a	X	X	X		X						4	12W	48W	2	USPC-39	DIAGRAM 3 & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE		
		Ⓔ	b	X	X	X		X						1	12FT@ 4W/ LF	48W	0	USPC-39	DIAGRAM 3	(2)#12, #12 GND, THWN, CU MC CABLE		
205	IT CLOSET	Ⓔ		X										1	12W	12W	0	USPC-39	MANUAL SWITCH	(2)#12, #12 GND, THWN, CU MC CABLE		
201/ 205/ 207/ 211	CORRIDOR/ CORRIDOR/ HALL/ CORRIDOR	Ⓔ	a	X	X	X								38	12W	456W	6	USPC-41	OCCUPANCY SENSOR W/ TIME CLOCK & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE		
		Ⓔ	b	X	X	X								1	39.2W	39.2W	0	USPC-41	OCCUPANCY SENSOR W/ TIME CLOCK	(2)#12, #12 GND, THWN, CU MC CABLE		
		Ⓔ	b	X	X	X								8	44.8W	358.4W	3	USPC-41	OCCUPANCY SENSOR W/ TIME CLOCK & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE		
		Ⓔ	c	X	X	X								10	12W	120W	3	USPC-41	OCCUPANCY SENSOR W/ TIME CLOCK & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE		
208	COLLAB ROOM	Ⓔ		X	X	X		X						4	12FT@ 4W/ LF	192W	(1)W/ 4FT EM SEC	USPC-37	DIAGRAM 3 & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE		
209	ASPIRE SEMINAR ROOM	Ⓔ		X	X	X		X						6	12FT@ 4W/ LF	288W	(1)W/ 4FT EM SEC	USPC-37	DIAGRAM 3 & DIAGRAM 7	(2)#12, #12 GND, THWN, CU MC CABLE		
210	COLLABORATION ROOM	Ⓔ		X	X	X		X						4	12FT@ 4W/ LF	192W	0	USPC-37	DIAGRAM 3	(2)#12, #12 GND, THWN, CU MC CABLE		
212	GN LOCKER	Ⓔ		X			X							3	20.7W	62.1W	0	F1-1	DIAGRAM 4	(2)#10, #12 GND, THWN, CU MC CABLE		
213	REF / STAFF LOCKER	Ⓔ		X			X							3	20.7W	62.1W	0	F1-1	DIAGRAM 4	(2)#10, #12 GND, THWN, CU MC CABLE		
214	JANITOR CLOS / MECH / ELEC	Ⓔ		X			X							2	20.7W	41.4W	0	F1-1	DIAGRAM 4	(2)#10, #12 GND, THWN, CU MC CABLE		
215	FITNESS STORAGE	Ⓔ		X			X							2	20.7W	41.4W	0	F1-1	DIAGRAM 4	(2)#10, #12 GND, THWN, CU MC CABLE		
216	TOILET	Ⓔ		X			X							1	20.7W	20.7W	0	F1-1	DIAGRAM 4	(2)#10, #12 GND, THWN, CU MC CABLE		
217	TOILET	Ⓔ		X			X							1	20.7W	20.7W	0	F1-1	DIAGRAM 4	(2)#10, #12 GND, THWN, CU MC CABLE		
218	WEIGHTS / FITNESS	Ⓔ	a	X	X	X	X							28	20.7W	579.6W	0	F1-1	DIAGRAM 3	(2)#10, #12 GND, THWN, CU MC CABLE		
218	WEIGHTS / FITNESS	Ⓔ	b	X	X	X								5	12W	60W	0	F1-1	DIAGRAM 2	(2)#10, #12 GND, THWN, CU MC CABLE		
219	COLLABORATION ROOM	Ⓔ		X	X	X		X						3	12FT@ 4W/ LF	144W	(1)W/ 4FT EM SEC	USPC-37	DIAGRAM 3	(2)#12, #12 GND, THWN, CU MC CABLE		
	SITE LIGHTING	Ⓔ									X			5	14W	70W	0	USPB-34	ASTRONOMIC TIMER	(2)#12 & #12 GND		
		Ⓔ									X			2	7W	14W	0	USPB-34	ASTRONOMIC TIMER	(2)#12 & #12 GND		
		Ⓔ									X			2	124W	248W	0	USPB-34	ASTRONOMIC TIMER	(2)#12 & #12 GND		
		Ⓔ									X			3	62W	186W	0	USPB-34	ASTRONOMIC TIMER	(2)#12 & #12 GND		
		Ⓔ									X			4	31W	31W	3	USPB-34	ASTRONOMIC TIMER	(2)#12 & #12 GND		