



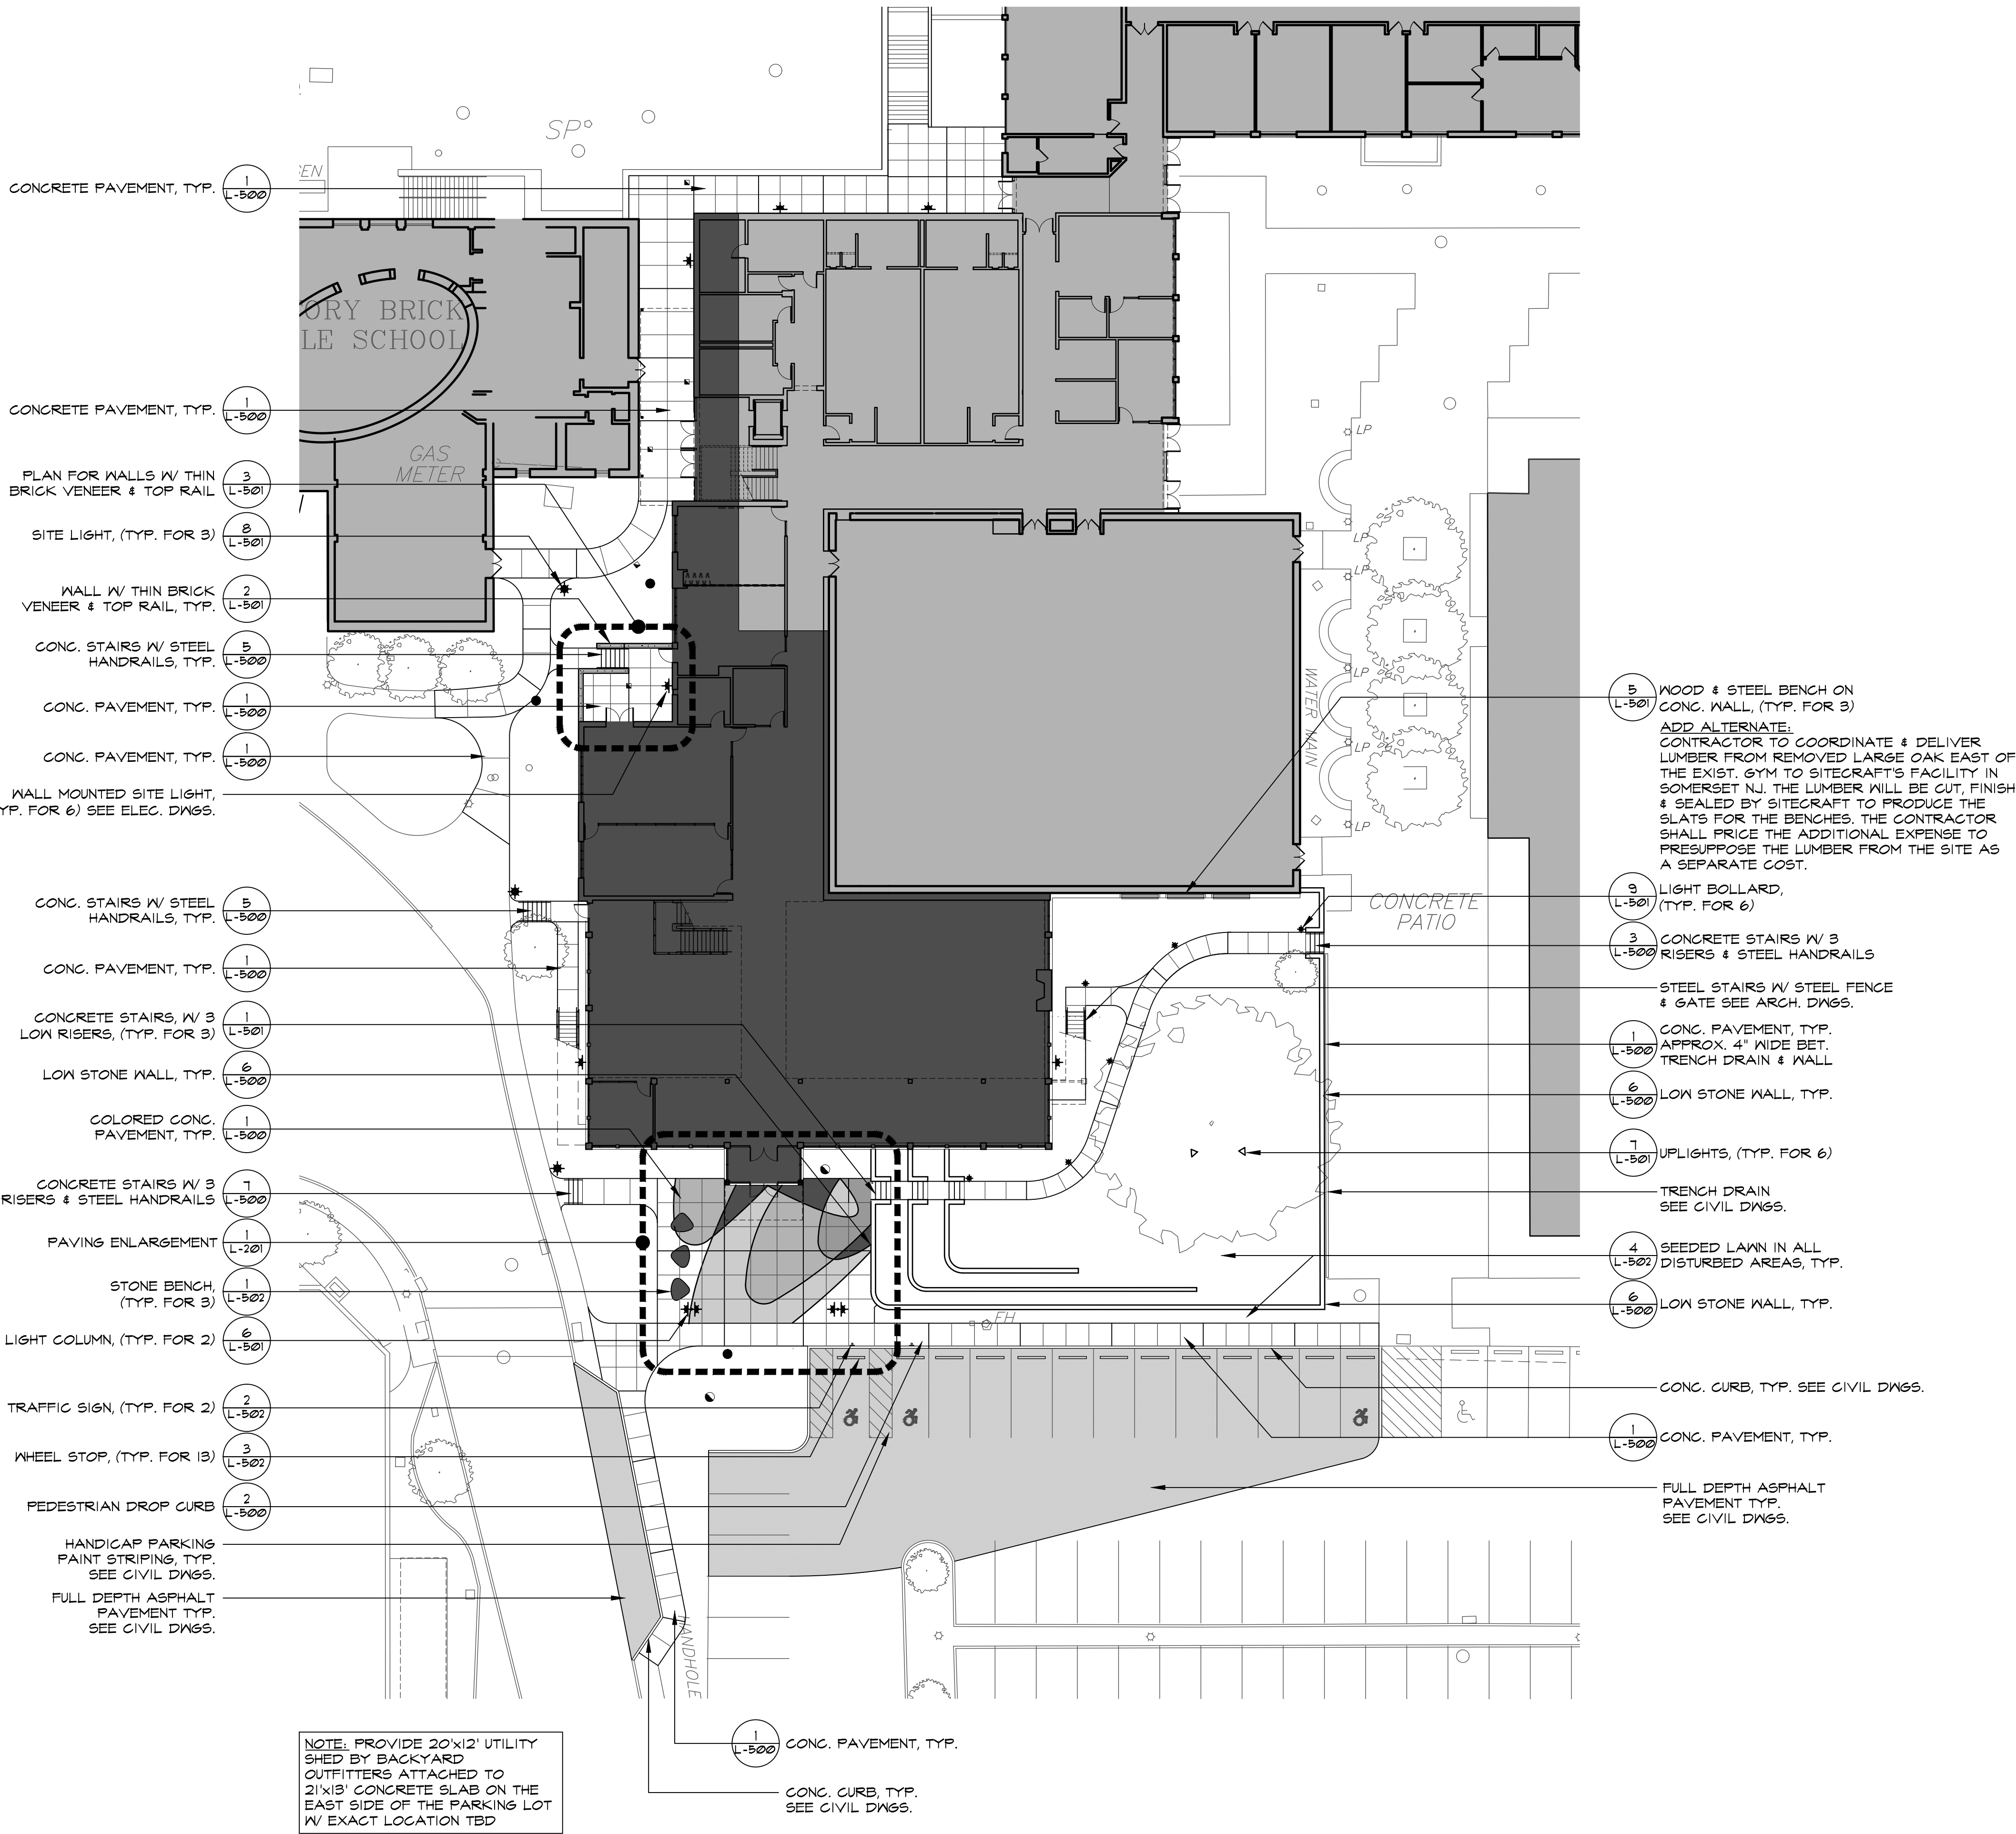

- GENERAL NOTES**
1. THE CONTRACTOR SHALL VERIFY ALL FIELD CONDITIONS AND SHALL BECOME FAMILIAR WITH THE SITE PRIOR TO COMMENCEMENT OF WORK. ACTUAL FIELD CONDITIONS MAY VARY FROM LAYOUT, DIMENSIONS AND EXISTING GRADES AS SHOWN ON THE PLANS. THE CONTRACTOR SHALL PERFORM THE WORK IN ACCORDANCE WITH EXISTING FIELD CONDITIONS. NOTIFY THE OWNER'S REPRESENTATIVE IN WRITING OF ANY DISCREPANCIES PRIOR TO CONTINUING WORK.
 2. THE CONTRACTOR SHALL SECURE THE WORK AREA WITH SPECIFIED BARRIERS AND FENCING AND MAINTAIN A SAFE AND SECURE CONSTRUCTION SITE.
 3. PEDESTRIAN AND VEHICULAR TRAFFIC ON ADJACENT ROADS AND SIDEWALKS SHALL BE MAINTAINED DURING CONSTRUCTION.
 4. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PREVENT DAMAGE OR INTERRUPTION TO EXISTING UTILITY SERVICE. ANY DAMAGE OR INTERRUPTION TO EXISTING UTILITY SERVICE SHALL BE RESTORED BY THE CONTRACTOR AT NO EXPENSE TO THE OWNER.
 5. THE CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE AGENCIES AND UTILITY COMPANIES HAVING JURISDICTION (INCLUDING, BUT NOT LIMITED TO, DEPARTMENT OF TRANSPORTATION, FIRE DEPARTMENT, DEPARTMENT OF ENVIRONMENTAL PROTECTION, TELEPHONE, CABLE, GAS, ETC.), OBTAIN PERMITS AND PAY ANY FEES ASSOCIATED WITH WORK OF THIS PROJECT. SEE BIDDING GUIDE SCOPE OF WORK; WORK NOT INCLUDED FOR EXCLUSIONS.
 6. IT IS ANTICIPATED THAT VARIOUS TYPES OF WORK FOR THIS CONTRACT WILL BE PERFORMED SIMULTANEOUSLY. THE PRIME CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING WORK BETWEEN SUBCONTRACTORS AND UTILITY COMPANIES TO ENSURE COMPLETION OF THE WORK IN A TIMELY AND WORKMAN-LIKE MANNER.
 7. THE CONTRACTOR SHALL PERFORM ALL WORK WITH CARE TO ENSURE MATERIALS TO REMAIN SHALL NOT BE DAMAGED. ANY DAMAGE TO MATERIAL TO REMAIN SHALL BE REPAIRED OR REPLACED TO THE SATISFACTION OF THE OWNER AND PAID FOR BY THE CONTRACTOR.
 8. REMOVE AND DISPOSE OF ALL ITEMS DESIGNATED AS REMOVALS OFF-SITE IN A LEGAL MANNER. ALL EXISTING INLETS, BASINS AND CONNECTIONS WITHIN THE PROJECT LIMIT SHALL BE CLEANED AND CLEARED TO THE SATISFACTION OF THE OWNER'S REPRESENTATIVE.
 9. UPON COMPLETION OF THE WORK THE CONTRACTOR SHALL RESTORE ALL "UNIMPROVED" AREAS UTILIZED FOR SITE ACCESS, STOCKPILING, CONSTRUCTION TRAILERS ETC. TO SERVICEABLE AND SAFE CONDITIONS AND TO THE SATISFACTION OF THE OWNER'S REPRESENTATIVE.

MATERIALS LEGEND

	CONC. CURB
	WALL
	DECORATIVE CONC. PAVERS PAVEMENT
	DECORATIVE CONC. PAVERS PAVEMENT
	CONCRETE PAVEMENT W/ EXPANSION JOINT
	FULL DEPTH ASPHALT PAVEMENT
	UPLIGHT
	LIGHT BOLLARD
	SITE LIGHT
	LIGHT COLUMN
	EXISTING TREE

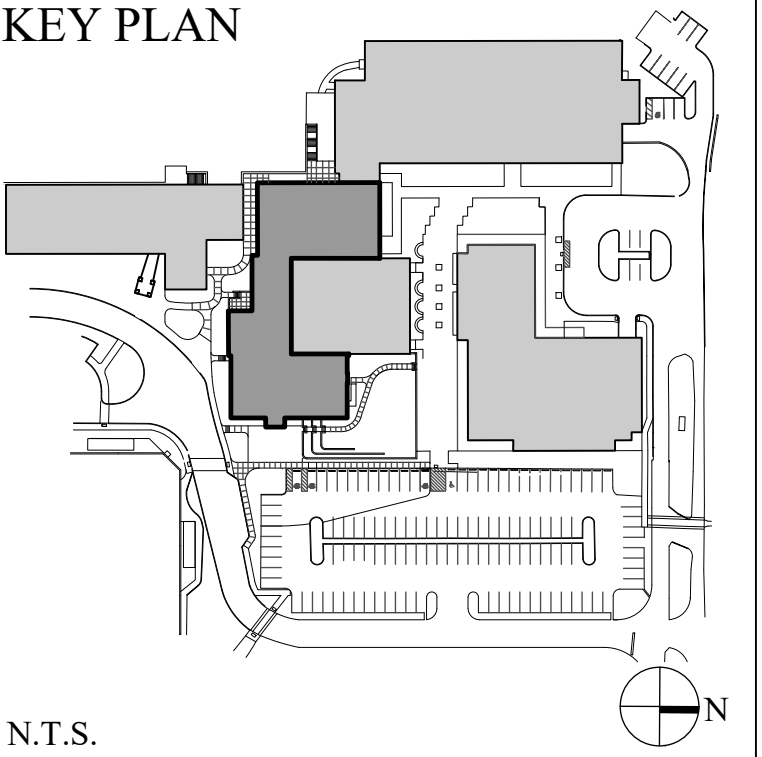

N.T.S.

1.	08/29/2025	ZHA SUBMITTAL
No.	Date	Revision
ARCHITECT PETER GISOLFI ASSOCIATES, LLP 566 WARBURTON AVENUE HASTINGS-ON-HUDSON, NY 10706 T: (914) 478-3677		
STRUCTURAL ENGINEER DRPILLA CONSULTING ENGINEERS 143 MAIN STREET NYACK, NY 10960 T: (845) 727-7793		
MEP ENGINEERS WATKINS ASSOCIATES, PLLC 68 PURCHASE STREET BTE, NY 10580 T: (914) 4987-8509		
ROOFING CONSULTANT WATKINS ASSOCIATES 20 MADISON AVENUE VALHALLA, NY 10595 T: (914) 498-3450		
CODE CONSULTANT MILTON GREGORY GREW, AIA 241 MAIN STREET SOUTH WOODBURY, CT 06798 T: (203) 217-1074		
SPECIFICATIONS CONSTRUCTION SPECIFICATIONS PO BOX 488 MORRISVILLE, NJ 07751 T: (732) 970-0700		
GEOTECHNICAL ENGINEER (BY OWNER) LANGAN CT, INC. 555 LONG WHARF DRIVE NEW HAVEN, CT 06595 (203) 962-5771		
CIVIL ENGINEER (BY OWNER) REDNESS AND MEAD 22 FIRST STREET STAMFORD, CT 06905 (203) 327-0500		

Stamp

Project Title

**KING SCHOOL
UPPER SCHOOL
CRI/COMMONS
ADDITION PROJECT**

1450 Newfield Avenue
Stamford, CT 06905


Drawing Title

MATERIALS PLAN

Scale	Job No.	Date	Drawing No.
1" = 20'-0"	2301.00	02/2025	L-200
Drawn	Checked	Approved	
RW	RW	MT	

Peter Gisolfi Associates
Architects • Landscape Architects, LLP
566 Warburton Avenue
Hastings on Hudson, NY 10706
(914) 478-3677

PETER GISOLFI ASSOCIATES LLP

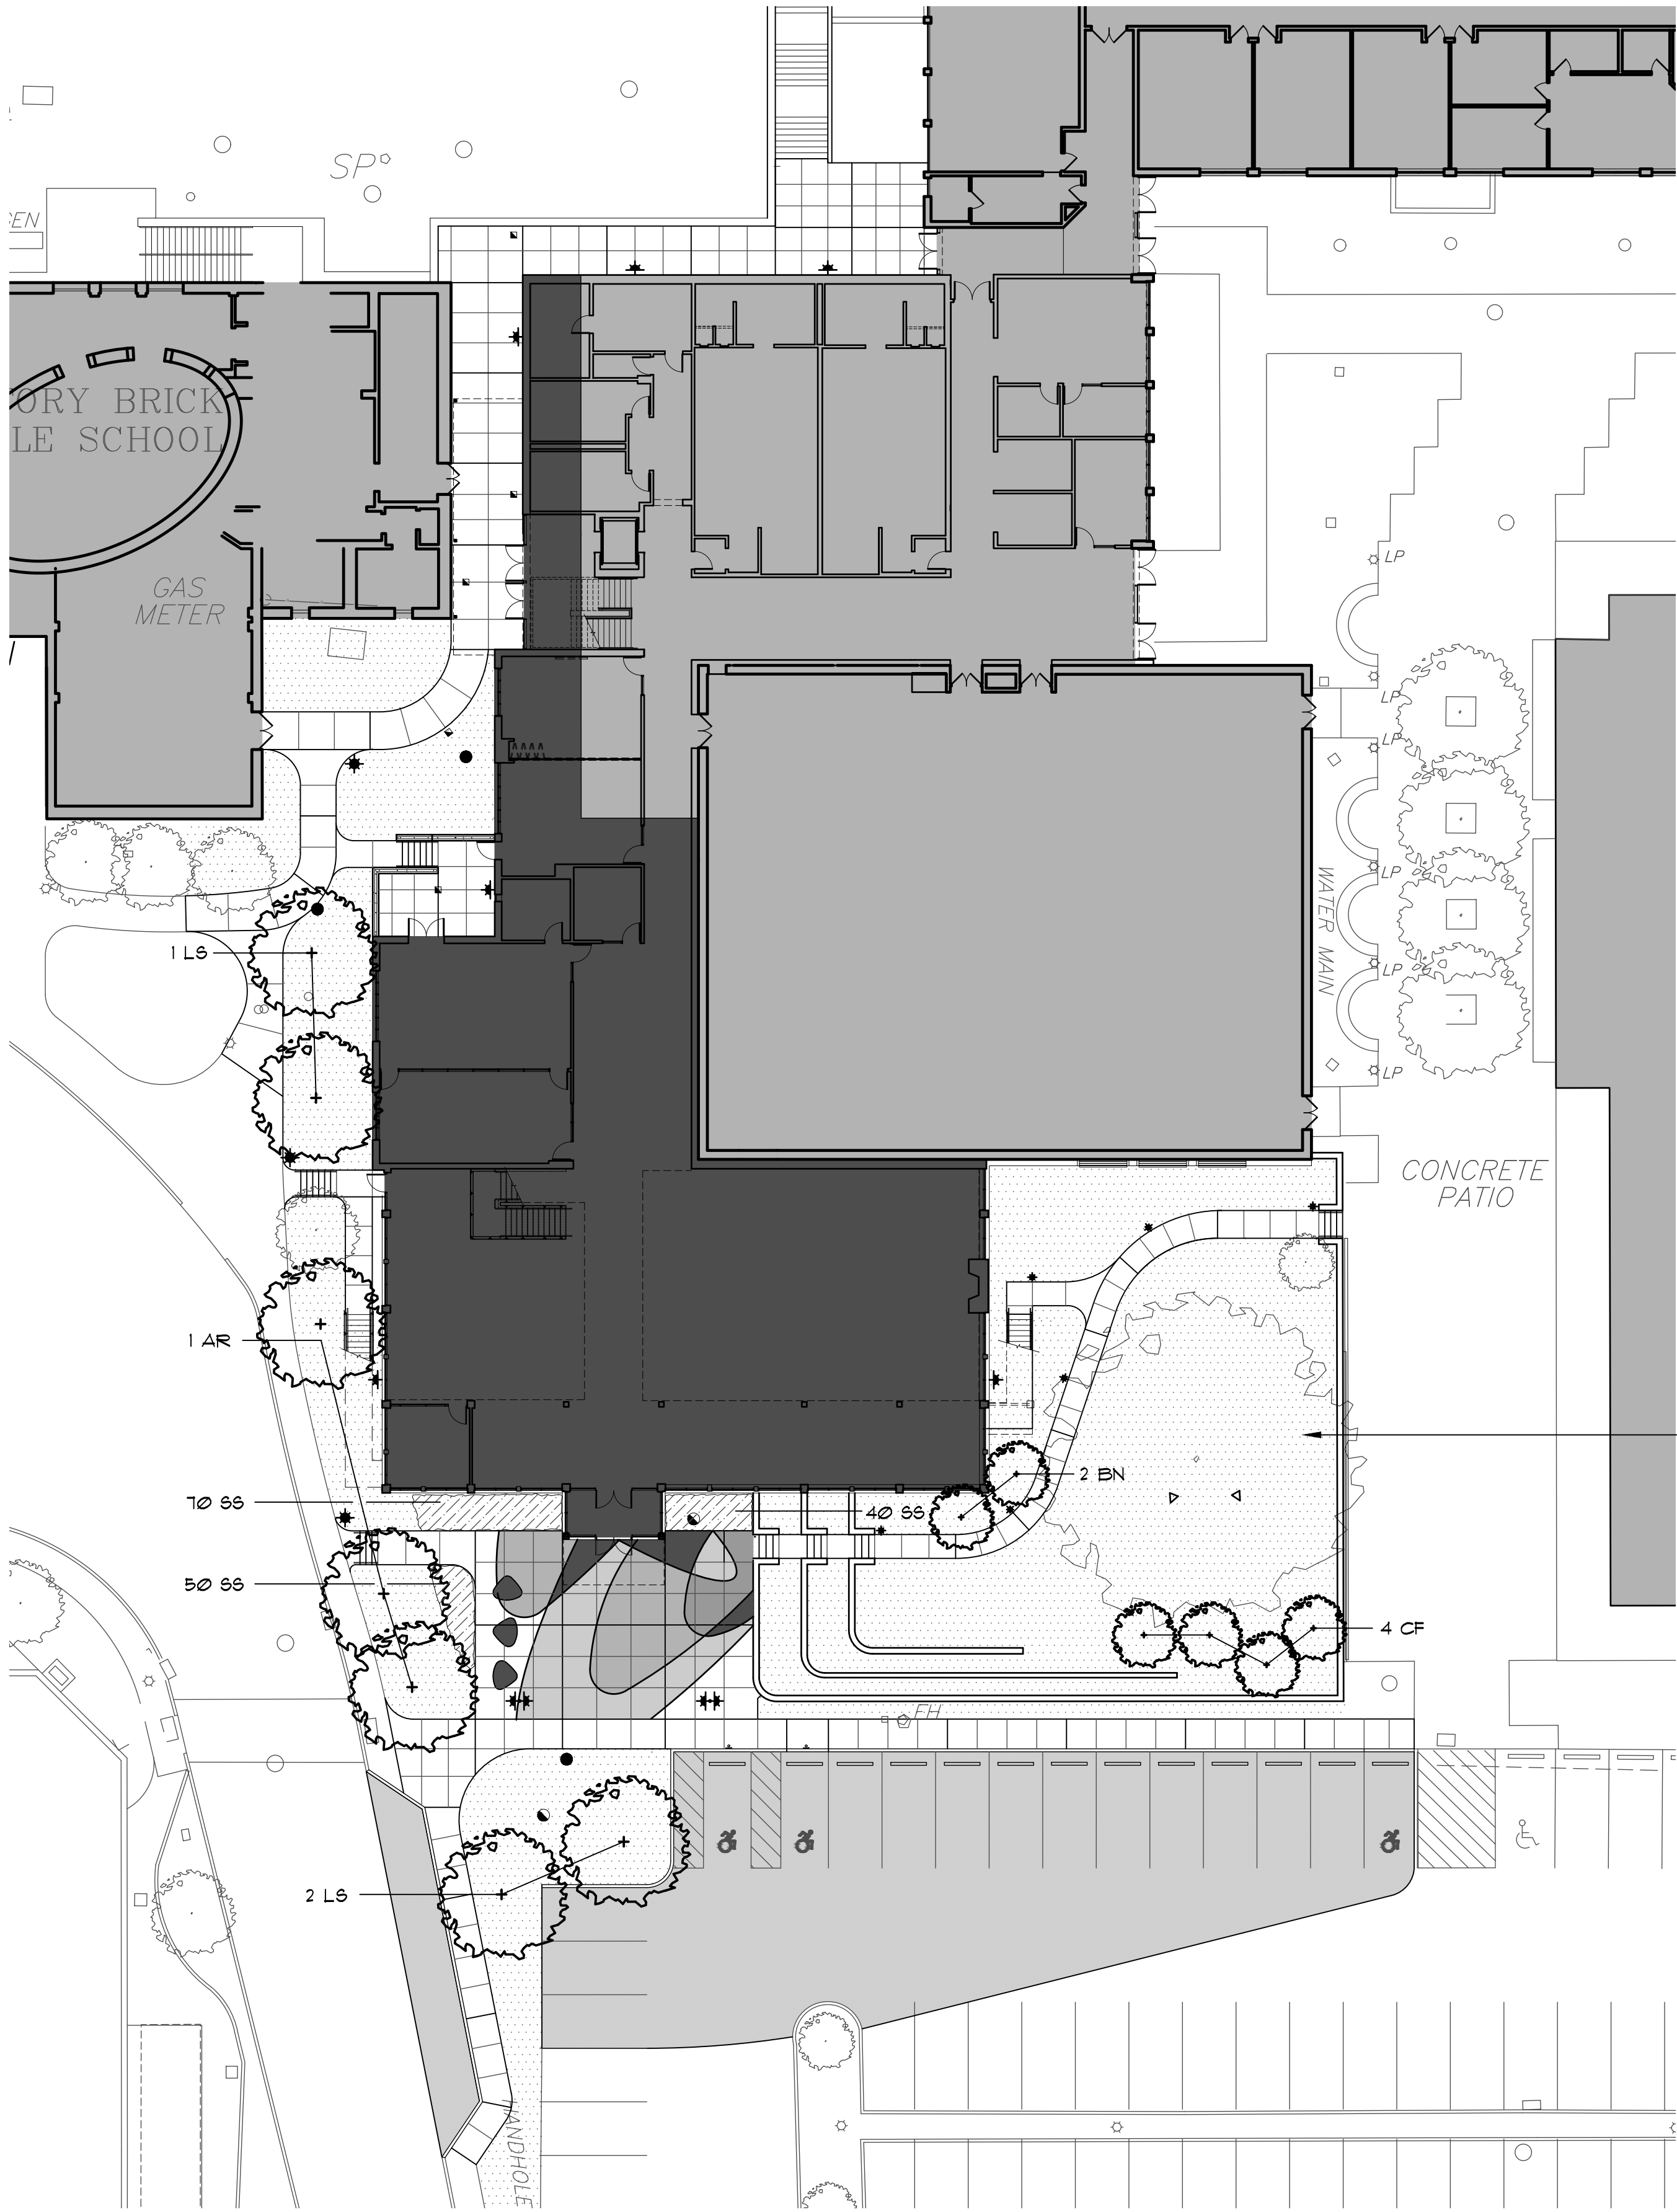

PLANT LIST				
QTY.	KEY	BOTANICAL NAME	COMMON NAME	SIZE
TREES				
4	AR	ACER RUBRUM 'OCTOBER GLORY'	OCTOBER GLORY RED MAPLE	3" CAL.
2	BN	BETULA NIGRA	RIVER BIRCH	8' - 10' HT.
4	CF	CORNUS FLORIDA	CHEROKEE PRINCESS DOGWOOD	8' - 10' HT.
4	LS	LIQUIDAMBAR STYRACIFLUA 'ROTANDILOBA'	ROUND LOBED SWEETGUM	3" CAL. B&B
GROUNDCOVERS & GRASSES				
160	SS	SCHIZACHYRIUM SCOPARIUM 'THE BLUES'	THE BLUES LITTLE BLUESTEM	1 GAL.

IMPORTED TOPSOIL SHALL BE HAVE CONTAMINANTS LEVELS ACCEPTED BY THE PROJECT ENGINEER. THE CONTRACTOR SHALL PERFORM OR PROVIDE TESTING FROM THE TOPSOIL VENDOR AS DETAILED IN THE PLANTING SEEDING & TOPSOIL SPEC.

NOTE: ALL DISTURBED AREAS TO RECEIVE TOPSOIL & TO BE SEEDED


PLANTING NOTES

- ALL PLANT MATERIAL SHALL CONFORM TO THE REQUIREMENTS AS ESTABLISHED BY THE AMERICAN ASSOCIATION OF NURSERYMAN, LATEST EDITION.
- ALL PLANT MATERIAL SHALL BE VIGOROUS AND FREE OF INJURY, INSECTS OR DEFECTS. PLANT MATERIAL SHALL BE STOCK FROM A RECOGNIZED NURSERY WITHIN THE NORTHEAST AND MID-ATLANTIC REGIONS.
- ALL PLANTS TO BE SELECTED AND TAGGED IN THE FIELD BY THE LANDSCAPE ARCHITECT.
- CONTRACTOR SHALL VERIFY QUANTITIES AS SHOWN ON THE CONTRACT DRAWINGS. IF A DISCREPANCY EXISTS BETWEEN THE PLANT COUNT AS SHOWN ON THE PLANT LIST AND THE PLANTING PLAN(S), THE PLAN(S) SHALL TAKE PRECEDENCE.
- THE LANDSCAPE ARCHITECT MAY REJECT ANY MATERIAL WHICH DOES NOT REPRESENT SPECIES AS OUTLINED IN THE PLANT LIST.
- NO SUBSTITUTION WILL BE MADE UNLESS AUTHORIZED BY THE LANDSCAPE ARCHITECT.
- ALL TREES SHALL BE PLANTED SO THAT THE ROOT FLARE IS 1" - 2" ABOVE FINISHED GRADE. CONTRACTOR SHALL VERIFY ROOT FLARE PRIOR TO PLANTING. REMOVE EXCESS SOIL OVER BALL AS REQUIRED TO EXPOSE THE ROOT FLARE ONLY AS DIRECTED BY THE LANDSCAPE ARCHITECT.
- ALL TREE PITS AND ENTIRE SHRUB/PERENNIAL BEDS TO RECEIVE 2" LAYER OF DOUBLE SHREDDED HARDWOOD BARK MULCH. MULCH SHALL NOT COME IN DIRECT CONTACT WITH TREE TRUNKS.
- PLANTED AREAS SHALL BE WATERED BY THE CONTRACTOR WHEN RAINFALL IS LESS THAN 1" PER WEEK AND PERIODS OF EXCESSIVE HEAT. SHRUBS SHALL RECEIVE 3-5 GALLONS PER PLANT AND TREES 7-10 GALLONS PER INCH OF CALIPER PER WEEK OR AS DIRECTED BY THE LANDSCAPE ARCHITECT.
- TREES SHALL BE GUYED OR STAKED AS INDICATED ON THE DRAWING. THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING ALL GUYING/STAKING FOR A PERIOD OF A YEAR. THE CONTRACTOR IS RESPONSIBLE FOR REMOVAL OF ALL GUYING/STAKING AFTER THIS PERIOD UPON DIRECTION OF THE OWNER'S REPRESENTATIVE.
- ALL LAWN AREAS SHALL BE SODDED. SEE SPECIFICATIONS FOR TURF TYPE.
- ALL PLANTING BEDS TO BE MULCHED WITH 2 INCHES OF CEDAR BARK MULCH.
- ALL TREES SHALL BE TAGGED AT THE NURSERIES WHILE STILL IN THE GROUND PRIOR TO DIGGING. THE CONTRACTOR SHALL PURCHASE LANDSCAPE MATERIALS AT NURSERIES WITHIN ONE HUNDRED AND FIFTY (150) MILES FROM THE PROJECT SITE ALLOWING THE LANDSCAPE ARCHITECT TO TRAVEL TO THE NURSERIES TO TAG THE TREES. THE CONTRACTOR SHALL OBTAIN THE NURSERIES DIGGING SEASONS SCHEDULE AS SOON AS POSSIBLE SO TAGGING TRIPS CAN BE SCHEDULED WHILE THE TREES ARE STILL IN THE GROUND.
- CONTRACTOR IS RESPONSIBLE FOR PROVIDING AND INSTALLING TOPSOIL QUANTITIES AS SHOWN ON THE PLANS AND DETAILS. IF TOPSOIL IS REQUIRED IN ADDITION TO SITE STOCKPILED TOPSOIL IT SHALL BE IMPORTED BY THE CONTRACTOR AS PART OF THIS CONTRACT IN ACCORDANCE WITH THE SPECIFICATIONS.

LEGEND

- PROPOSED TREE
- SEEDED LAWN AREA
- GRASSES AREA
- GROUNDCOVERS AREA
- EXISTING TREE TO REMAIN

KEY PLAN

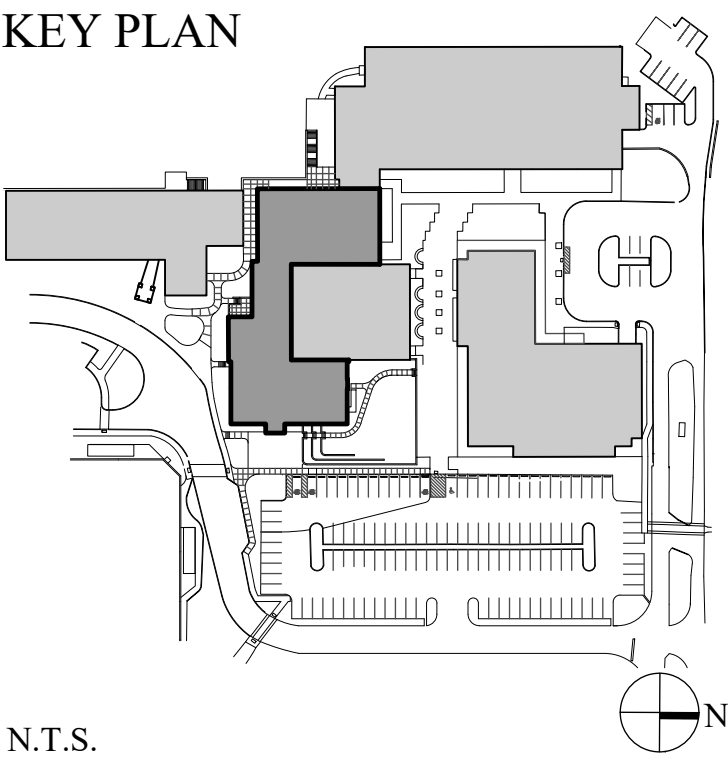

N.T.S.

No.	Date	Revision
1.	08/29/2025	ZHA SUBMITTAL
ARCHITECT PETER GISOLFI ASSOCIATES, LLP 566 WARBURTON AVENUE HASTINGS-ON-HUDSON, NY 10706 T: (914) 478-3677		
STRUCTURAL ENGINEER DRPILLA CONSULTING ENGINEERS 143 MAIN STREET NYACK, NY 10960 T: (845) 727-7793		
MEP ENGINEERS WATSKY ASSOCIATES, PLLC 68 PURCHASE STREET NYE, NY 10580 T: (914) 498-3450		
ROOFING CONSULTANT WATSKY ASSOCIATES 20 MADISON AVENUE VALHALLA, NY 10595 T: (914) 498-3450		
CODE CONSULTANT MILTON GREGORY GREW, AIA 241 MAIN STREET SOUTH WOODBURY, CT 06798 T: (203) 215-1074		
SPECIFICATIONS CONSTRUCTION SPECIFICATIONS M0861 ANVILLE, NJ 07751 T: (203) 327-4500		
CIVIL ENGINEER (BY OWNER) L'ANGLAN CT, INC. 555 LONG WHARF DRIVE NEW HAVEN, CT 06515 (203) 962-5771		
CIVIL ENGINEER (BY OWNER) REDNESS AND MEAD 22 FIRST STREET STAMFORD, CT 06905 (203) 327-4500		

Project Title
**KING SCHOOL
UPPER SCHOOL
CRI/COMMONS
ADDITION PROJECT**
1450 Newfield Avenue
Stamford, CT 06905

Drawing Title			
PLANTING PLAN			
Scale	Job No.	Date	Drawing No.
1" = 20'-0"	2301.00	02/2025	L-400
Drawn	Checked	Approved	
RW	RW	MT	
Peter Gisolfi Associates Architects • Landscape Architects, LLP 566 Warburton Avenue Hastings on Hudson, NY 10706 (914) 478-3677			
PETER GISOLFI ASSOCIATES LLP			