

AUDIO VISUAL INSTALLATION NOTES	
1.	MOUNTING HEIGHTS ARE TO THE CENTER OF DEVICE, UNLESS OTHERWISE NOTED.
2.	ALL CABLING SHALL BE HOME-RUN BETWEEN POINTS. NO SPLICING SHALL BE PERMITTED.
3.	CONTRACTOR SHALL PROVIDE 15' SERVICE LOOP FOR ALL CABLING AT EQUIPMENT RACK LOCATIONS & PULL BOXES.
4.	ALL CABLING SHALL BE LABELED FOR EASY IDENTIFICATION AT BOTH TERMINATION POINTS AND AT INTERMEDIATE PULL-POINTS. LABELS SHALL BE MACHINE PRINTED, SELF-LAMINATING AND CONTAIN THE FOLLOWING INFORMATION IN 1/8" TEXT: CABLE ID, SOURCE DEVICE, DESTINATION DEVICE.
5.	ALL AUDIO VISUAL WALL CONTROLS SHALL BE MOUNTED TO MATCH STANDARD LIGHT SWITCH HEIGHT FOR THE PROJECT.
6.	ALL RIGGING SHALL COMPLY WITH FEDERAL SPECIFICATION FF-C-450 FOR WIRE AND CLAMPS.
7.	ALL 70V SPEAKERS SHALL BE TAPPED OR SET AT THE HIGHEST POWER SETTING UNLESS OTHERWISE NOTED.
8.	ALL HARDWARE SHALL BE TIGHTENED TO MANUFACTURER SPECIFIC TORQUE.
9.	FORCED STEEL HARDWARE IS REQUIRED. MALLEABLE CAST IRON CLAMPS OR CLIPS SHALL NOT BE USED.
10.	CONTRACTOR SHALL OBTAIN APPROVAL BEFORE DRILLING OR CUTTING BUILDING STRUCTURE TO AVOID COMPROMISING STRUCTURAL INTEGRITY.
11.	ALL CLAMPS SHALL BE INSTALLED ACCORDING TO MANUFACTURER'S SPECIFICATIONS FOR QUANTITIES, SIZING, SPACING, WIRE ROPE LAY AND TORQUE.
12.	CONSTRUCTION EPOXY USED TO ADHERE THREADED ROD TO BE SPECIFIED BY THE PROJECT STRUCTURAL ENGINEER.

AUDIO VISUAL GENERAL NOTES	
1.	ALL SYMBOLS AND NOTES ARE NOT NECESSARY APPLICABLE TO THIS DOCUMENT PACKAGE.
2.	CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL DESIGN ASPECTS WITH AN ON-SITE INSPECTION OF EXISTING CONDITIONS.
3.	OBTAINING ALL NECESSARY PERMITS AND ANY RELATED FEES SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.
4.	GENERAL CONTRACTOR TO PROVIDE BLOCKING FOR ALL DISPLAYS. A 4'X8' CONTINUOUS SHEET OF 1" TO 1-1/2" PLYWOOD SECURED TO A MINIMUM OF 3 WALL STUDS SHALL BE INSTALLED FOR ALL DISPLAYS GREATER THAN 55" DIAGONAL AND EQUAL OR LESS THAN 90" DIAGONAL. A 4'X4' CONTINUOUS SHEET OF 1" TO 1-1/2" PLYWOOD SECURED TO A MINIMUM OF 3 WALL STUDS SHALL BE INSTALLED FOR EACH DISPLAY 55" DIAGONAL OR SMALLER. DISPLAYS EXCEEDING 90" DIAGONAL SHALL HAVE THE BLOCKING REQUIREMENTS REVIEWED BY A STRUCTURAL ENGINEER.
5.	ALL WALLS WITH DISPLAYS SHALL BE STRUCTURAL SUPPORTED TO THE DECK ABOVE.
6.	GENERAL CONTRACTOR SHALL PROVIDE ALL REQUIRED STRUCTURAL BUILDING ATTACHMENTS.
7.	SUFFICIENT COOLING CAPACITY FOR AUDIO VISUAL EQUIPMENT, INCLUDING AIR CONDITIONING, EXHAUST FANS, UNDERCUT DOORS, ETC. SHALL BE PROVIDED BY OTHERS.
8.	ALL TABLE-TOP BOXES SHALL BE FURNISHED AND INSTALLED BY THE FURNITURE VENDOR, UNLESS OTHERWISE NOTED.
9.	ALL RIGGING REQUIRED FOR THIS PROJECT SHALL BE SUBMITTED TO AND APPROVED BY A STRUCTURAL ENGINEER PRIOR TO INSTALLATION.
10.	ALL PLATE FINISHES AND LOCATIONS SHALL BE VERIFIED WITH THE ARCHITECT, OWNER AND INTERIOR DESIGNER PRIOR TO PURCHASE.


AUDIO VISUAL ELECTRICAL NOTES	
1.	ELECTRICAL WORK TO BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND LOCAL AUTHORITIES HAVING JURISDICTION.
2.	ALL OUTLETS, CONDUIT, JUNCTION BOXES AND BACK BOXES SHALL BE FURNISHED BY THE ELECTRICAL CONTRACTOR, UNLESS OTHERWISE NOTED.
3.	ALL CONDUITS SHALL BE DEBURRED, CLEANED, GROMMETED, TAGGED AND FURNISHED WITH PULL TAPES.
4.	POWER RECEPTACLES SHOWN ON THESE DRAWINGS ARE INTENDED FOR SPECIFIC AUDIOVISUAL EQUIPMENT. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL UTILITY POWER RECEPTACLES.
5.	ELECTRICAL PANEL(S) SERVING AUDIO EQUIPMENT SHALL HAVE AN ISOLATED GROUND AND SHALL NOT BE SHARED WITH EQUIPMENT THAT CAN CREATE LINE NOISE SUCH AS MOTORS OR HIGH FREQUENCY EQUIPMENT SUCH AS NETWORK SERVERS.
6.	ALL AUDIO EQUIPMENT SHALL BE SUPPLIED WITH 120V, SINGLE-PHASE POWER WITH LESS THAN 5-VOLTS BETWEEN PHASE AND NEUTRAL.
7.	AUDIOVISUAL RECEPTACLES WITHIN A SYSTEM SHALL SHARE A COMMON PHASE AND COMMON GROUND.
8.	EXACT OUTLET HEIGHTS TO BE DETERMINED BY ARCHITECT.
9.	CONDUIT RUNS ON THESE DRAWINGS DIAGRAMMATICALLY SHOW INTERCONNECTION BETWEEN TERMINATION POINTS. THE EXACT PATH OF CONDUITS ARE TO BE DETERMINED BY THE CONTRACTOR AND FIELD CONDITIONS. SHOP DRAWINGS SHALL BE SUBMITTED FOR APPROVAL BY AV DESIGNER AND ELECTRICAL ENGINEER.
10.	ALL CONDUIT RUNS SHALL BE CONCEALED WITHIN WALLS, WITHIN THE SLAB OR WITHIN THE CEILING PLENUM, UNLESS OTHERWISE NOTED.
11.	OUTDOOR CONDUIT RUNS MUST USE WATER-TIGHT FITTING AND TERMINATE AT WATER-TIGHT JUNCTION BOXES.
12.	CONTRACTOR TO CONFIRM ALL CONDUIT DIAMETERS ON DRAWINGS ARE SUFFICIENT FOR INDICATED TOTAL CABLE SIZE / QUANTITIES AND ELECTRICAL CODES.

AUDIO VISUAL ABBREVIATIONS			
Ø	PHASE	FLEX	FLEXIBLE
1P	SINGLE POLE	FS	FAIL SAFE
2P	TWO POLE	FSE	FAIL SECURE
3P	THREE POLE	FT	FEET OR FOOT
A	AMPERES	FTP	FOIL TWISTED PAIR
AC	ALTERNATING CURRENT	F/UTP	OVERALL FOIL SCREENED WITH UNSHIELDED TWISTED PAIRS
AD	ANALOG-TO-DIGITAL	G	GROUND
AP	ACCESS POINT	GEC	GROUNDING ELECTRODE CONDUCTOR
AFF	ABOVE FINISHED FLOOR	GFI	GROUND FAULT INTERRUPTER
AUI	ALARM INTERFACE UNIT	GPI	GENERAL PURPOSE INTERFACE
ALM	ALARM	GRS	GALVANIZED RIGID STEEL
ARF	ABOVE RAISED FLOOR	GUI	GRAPHICAL USER INTERFACE
ATR	ALL THREADED ROD	H	HIGH OR HEIGHT
AUTO	AUTOMATIC	HC	HORIZONTAL CROSS-CONNECT
AV	AUDIO VISUAL	HH	HAND HOLE
AVC	AUDIO VISUAL CONTRACTOR	HP	HORSEPOWER
AWG	AMERICAN WIRE GAUGE	HVAC	HEATING, VENTILATION AND AIR CONDITIONING
BC	BONDING CONDUCTOR	HZ	HERTZ
BG	BREAK GLASS SWITCH	IC	INTERMEDIATE CROSS-CONNECT
BLDG	BUILDING	ICM	INTERCOM
BTU	BRITISH THERMAL UNITS	ID	INSIDE DIAMETER
CAB	CABINET	IDF	INTERMEDIATE DISTRIBUTION FRAME
CAT	CATALOG	IG	ISOLATED GROUND
C	CONDUIT	IN	INCH
CAM	VIDEO CAMERA	INST	INSTRUMENT
CCTV	CLOSED CIRCUIT TELEVISION	I/O	INPUT / OUTPUT
CE	CARD ENTRY	IP	INTERNET PROTOCOL
CKC	CLOSED CIRCUIT TELEVISION KEYBOARD CONTROLLER	IR	INFRARED
CKT	CIRCUIT	ISP	INTERNET SERVICE PROVIDER
CL	CENTER LINE	IT	INFORMATION TECHNOLOGY
CLG	CEILING	ISTP	INDIVIDUALLY SHIELDED TWISTED PAIR
CLOS	CLOSET	JB	JUNCTION BOX
CNTL	CONTROL	JBA	JUNCTION BOX FOR AUDIO
COMM	COMMUNICATION	JBV	JUNCTION BOX FOR VIDEO
COND	CONDUCTOR	KMIL	THOUSAND CIRCULAR MILS
CONT	CONTINUATION	KVA	KILOVOLT AMPERE
CP	CONSOLIDATION POINT	KW	KILOWATT
CPU	CENTRAL PROCESSING UNIT	KVM	KEYBOARD, VIDEO, MOUSE
CRAC	COMPUTER ROOM AIR CONDITIONING UNIT	LAN	LOCAL AREA NETWORK
CU	COPPER	LCD	LIQUID CRYSTAL DISPLAY
D	DEEP OR DEPTH	LED	LIGHT EMITTING DIODE
DIA	DIGITAL-TO-ANALOG	LTG	LIGHTING
DAS	DISTRIBUTED ANTENNA SYSTEM	LV	LOW VOLTAGE
DB	DECIBEL	M	CCTV MONITOR
DEG	DEGREE	MAX	MAXIMUM
DEG	DEGREE	MC	MAIN CROSS-CONNECT
DEMARC	DEMARICATION POINT	MD	MAIN DISTRIBUTOR
DGP	DATA GATHERING PANEL	MDF	MAIN DISTRIBUTION FRAME
DIA	DIAMETER	MDU	MULTI-DWELLING UNIT
DIU	DATA INTERFACE UNIT	MECH	MECHANICAL
DIV	DIVISION	MER	MAIN EQUIPMENT ROOM
DJB	DOOR JUNCTION BOX	MH	MANHOLE
DN	DOWN	MHZ	MEGAHERTZ
DPDT	DOUBLE POLE DOUBLE THROW	MIC	MICROPHONE
DT	DUST TIGHT	MIN	MINIMUM
DWG	DRAWING	MM	MULTIMODE
E	EXISTING TO REMAIN	MTD	MOUNTED
EA	EACH	MTG	MOUNTING
EC	EMPTY CONDUIT	MTS	MANUAL TRANSFER SWITCH
E.C.	ELECTRICAL CONTRACTOR	MUTOA	MULTI-USER TELECOMMUNICATIONS OUTLET ASSEMBLY
EF	ENTRANCE FACILITY	MUX	MULTIPLEXER
EL	ELEVATION	(N)	NEW
ELEC	ELECTRICAL	N	NEUTRAL
ELEV	ELEVATOR	NA	NOT AVAILABLE
EM, EMER	EMERGENCY	NAS	NETWORK ATTACHED STORAGE
EMI	ELECTROMAGNETIC INTERFERENCE	NC	NORMALLY CLOSED
EMT	ELECTRICAL METALLIC TUBING	NEC	NATIONAL ELECTRICAL CODE
EQUIP	EQUIPMENT	NIC	NOT IN CONTRACT
E.R.	EQUIPMENT ROOM	NM	NANOMETER
ER	EXISTING TO BE REMOVED	NO	NORMALLY OPEN
ERP	EXISTING IN RELOCATED POSITION	NRTL	NATIONALLY RECOGNIZED TESTING LABORATORY
ERR	EXISTING TO BE REMOVED & RELOCATED	NTS	NOT TO SCALE
EX, EXIST	EXISTING	OC	ON CENTER
EXT	EXTERIOR	OD	OUTSIDE DIAMETER
FA	FIRE ALARM	OF	OPTICAL FIBER
FACP	FIRE ALARM CONTROL PANEL	OFE	OWNER-FURNISHED EQUIPMENT
FB	FLOOR BOX	OSP	OUTSIDE PLANT
FBO	FURNISHED BY OTHER DIVISION OF WORK	OTDR	OPTICAL TIME DOMAIN REFLECTOMETER
FD	FLOOR DISTRIBUTOR	P	POLE
FL	FLOOR	PA	PUBLIC ADDRESS
PB	PULL BOX	PBS	PUSH BUTTON SWITCH
PBX	PRIVATE BRANCH EXCHANGE	PC	PERSONAL COMPUTER
PDU	POWER DISTRIBUTION UNIT	PDU	POWER DISTRIBUTION UNIT
P/N	PART NUMBER	PNL	PANEL
POE	POINT OF ENTRY	POE	POWER OVER ETHERNET
POS	POINT OF SALE	PROJ	VIDEO PROJECTOR
PS	POWER SUPPLY	PWR	POWER
QOS	QUALITY OF SERVICE	REC, RECEPT	RECEPTACLE
REQ	REQUIRED	RFL	RAISED FLOOR
RGS	RIGID STEEL CONDUIT	RM	ROOM
RU, RMU	RACK MOUNT UNITS	RX	RECEIVE
(E)	EXISTING TO BE REMOVED AND RETURNED TO OWNER	SAN	STORAGE AREA NETWORK
SCH, SCHED	SCHEDULE	SEC	SECURITY
SECT	SECTION	SFF	SMALL FORM FACTOR
SFRO	SHOWN FOR REFERENCE ONLY	SM	SINGLE-MODE
SNR	SIGNAL-TO-NOISE RATIO	SOW	SCOPE OF WORK
SPEC	SPECIFICATION	SPKR	SPEAKER
STD	STANDARD	STP	SHIELDED TWISTED PAIR
SW	SWITCH	SWBD	SWITCHBOARD
SYN	SYSTEM	SYS	SYSTEM
SYM	SYMMETRICAL	TBB	TELECOMMUNICATIONS BONDING BACKBONE
TBD	TO BE DETERMINED	TE	TELECOMMUNICATIONS ENCLOSURE
TEL	TELEPHONE	TELECO	TELECOMMUNICATIONS
M		TEMP	TEMPERATURE
TGB	TELECOMMUNICATIONS GROUNDING BUSBAR	THERM	THERMOSTAT
TGWG	TELECOMMUNICATIONS MAIN GROUNDING BUSBAR	TP	TAMPER PROOF
TR	TELECOMMUNICATIONS ROOM	TRANSF, XFMR	TRANSFORMER
TV	TELEVISION	TVSS	TRANSIENT VOLTAGE SURGE SUPPRESSION
TX	TRANSMIT	TYP	TYPICAL
UF	UNDERFLOOR DUCT	UN	UNLESS OTHERWISE NOTED
UPS	UNINTERRUPTIBLE POWER SUPPLY	UTP	UNSHIELDED TWISTED PAIR
V	VOLT OR VOLTAGE	V	VOLT OR VOLTAGE
VA	VOLT AMPERE	VCR	VIDEO CASSETTE RECORDER
VDA	VIDEO DISTRIBUTION AMPLIFIER	VD	VIDEO DISPLAY
VIM	VIDEO INTERFACE MODULE	VMP	VIDEO MULTIPLEXER
VMP	VIDEO MULTIPLEXER	VP	VIDEO PROJECTOR
VTC	VIDEO CONFERENCING	W	WATT
W	WATT	W	WIDE OR WIDTH
WAN	WIDE AREA NETWORK	WLAN	WIRELESS LOCAL AREA NETWORK
WP	WEATHERPROOF	WT	WATERTIGHT
XP	EXPLOSION PROOF	ZD	ZONE DISTRIBUTOR

AUDIOVISUAL EQUIPMENT SYMBOLS	
TV43	43" 4K RESOLUTION DISPLAY - SAMSUNG QM43C COMMERCIAL RATED DIM 38.2" W x 22" H x 1.1" D, WEIGHT: 26 LBS
TV55	55" 4K RESOLUTION DISPLAY - SAMSUNG QM55C COMMERCIAL RATED DIM 48.7" W x 27.9" H x 1.1" D, WEIGHT: 35 LBS
TV75	75" 4K INTERACTIVE DISPLAY - VIEWSONIC IFP7552-1C DIM 68" W x 42.3" H x 4.8" D, WEIGHT: 125 LBS
FP138	138" MOBILE DISPLAY - VIEWSONIC LDS138-151, COMMERCIAL RATED DIM 120.6" W x 102.3" H x 30.7" D, WEIGHT: 500 LBS
MT1	WALL MOUNT BRACKET - VIEWSONIC WMK-047-2 DIM: 37.8" W X 25.6" H X 1.8" D; WEIGHT CAPACITY: 350 LBS
MT2	WALL MOUNT BRACKET, CHIEF RMF3 DIM: 22" W X 19.2" H X 1" D WEIGHT CAPACITY: 125 LBS
MT3	FLOOR MOUNT BRACKET, CHIEF PFB1UB DIM: 38" W X 65" H X 8" D WEIGHT CAPACITY: 200 LBS
WB1	IN-WALL STORAGE BOX - CHIEF PAC 526F DIM: 14.25" W X 14.25" H X 3.9" D
VS81	VIDEO SOUNDBAR, POLY X32 DIM: 22.7" W X 2.6" D X 3" H
VS82	VIDEO SOUNDBAR, POLY XT2 DIM: 33.1" W X 5.3" H X 4.6" D
CAM1	VIDEO CONFERENCE CAMERA - QSC NC-12X80 DIM: 6.7" W X 8" H X 5.6" D
SPK1	IN-CEILING SPEAKER - QSC AD-C8T-LP DIM: 13.4" W X 4" D, WEIGHT: 15 LBS
TF1	CONTROL PANEL, POLY TC10 DIM: 10.25"W X 7.25"D X 2.5"H WEIGHT: 2.8 LBS
TF2	CONTROL PANEL, QSC TSC-70-G3 DIM: 7.3"W X 4.5"D X 1.5"H
PRJ	4K VIDEO PROJECTOR - PANASONIC PT-REQ15 DIM: 19.7" W X 8.5" H X 25.5" D, WEIGHT: 65 LBS
PM11	PROJECTOR MOUNT, CHIEF VMA2S & VCMU DIM: 24.5" L X 19.6" W X 11.5" H, WEIGHT CAPACITY: 150 LBS
SCRN	150" PROJECTION SCREEN, SCREEN INNOVATIONS ZERO-G DIM: 130.75" W x 73.6" H x 10.85" D, WEIGHT: 200 LBS
WP1	INPUT PLATE - USBC/HDMI - 1-GANG

AUDIOVISUAL INFRASTRUCTURE SYMBOL LEGEND	
VB	CHIEF PAC526F IN-WALL STORAGE BOX GC TO PROVIDE TWO (2) DUPLEX RECEPTACLES, ONE (1) TELECOMMUNICATIONS DATA OUTLET AT EACH BOX, ONE (1) 1-1/4" CONDUIT STUB UP TO ACCESSIBLE CEILING
ΦΦ	DUAL DUPLEX POWER RECEPTACLES, PROVIDE TWO DUPLEX OUTLETS AV CIRCUITS CAN BE SHARED
⊕	DUPLEX POWER RECEPTACLES CEILING MOUNTED, PROVIDE TWO DUPLEX OUTLETS AV CIRCUITS CAN BE SHARED
▼	TEL/DATA DATA OUTLET (REFER TO TC DRAWINGS FOR DETAILS)
⦿	CEILING TEL/DATA DATA OUTLET (REFER TO TC DRAWINGS FOR DETAILS)
▼	TEL/DATA DATA OUTLET FOR ROOM SCHEDULER (REFER TO TC DRAWINGS FOR DETAILS)
IF X	CONFERENCE TABLE IN-FEED / POKE-THRU DEVICE BY E.C. X: QUANTITY OF 1-1/4" CONDUIT(S) FROM TABLE TO AV WALL BOX
AV X-Y	WALL RECESSED JUNCTION BOX BY E.C. INSTALL AT STANDARD AFF, U.O.N. X: GANG SIZE OF JUNCTION BOX Y: QUANTITY OF 1-1/4" CONDUITS FOR AUDIOVISUAL

AUDIOVISUAL DRAWING LIST	
TA-001.00	AUDIOVISUAL COVER PAGE
TA-101.00	1ST FLOOR AUDIOVISUAL PLAN
TA-102.00	2ND FLOOR AUDIOVISUAL PLAN
TA-201.00	1ST FLOOR AUDIOVISUAL RCP PLAN
TA-202.00	2ND FLOOR AUDIOVISUAL RCP PLAN
TAE-101.00	1ST FLOOR AUDIOVISUAL INFRASTRUCTURE PLAN
TAE-102.00	2ND FLOOR AUDIOVISUAL INFRASTRUCTURE PLAN
TA-301.00	AUDIOVISUAL ELEVATION DETAILS
TA-302.00	AUDIOVISUAL ELEVATION DETAILS
TA-601.00	AUDIOVISUAL SIGNAL FLOW
TA-801.00	AUDIOVISUAL COMPONENT LIST
TA-802.00	AUDIOVISUAL COMPONENT LIST
TA-803.00	AUDIOVISUAL SPECIFICATIONS
TA-804.00	AUDIOVISUAL SPECIFICATIONS

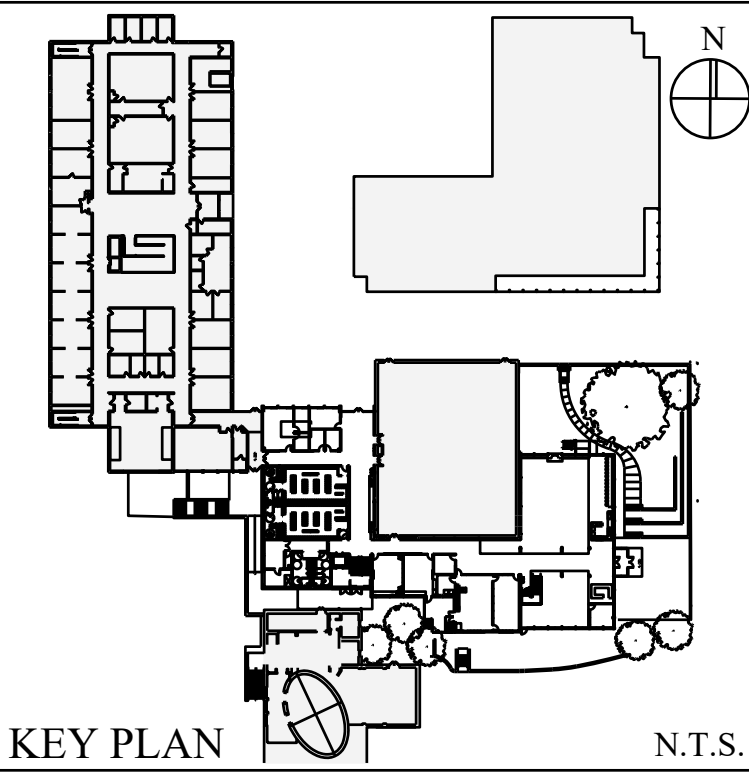

KEY PLAN N.T.S.

02/16/2026	ISSUE FOR CONSTRUCTION - BULLETIN 01	
01/19/2026	ISSUE FOR CONSTRUCTION - REVISED SCOPE	
01/19/2026	ISSUE FOR CONSTRUCTION	
No.	Date	Revision
ARCHITECT		
PETER GISOLFI ASSOCIATES, LLP 566 WARBURTON AVENUE HASTINGS-ON-HUDSON, NY 10706 T: (914) 478-3677		STRUCTURAL ENGINEER DIRELLA CONSULTING ENGINEERS 143 MAIN STREET NY ACK, NY 10960 T: (845) 727-7793
MEP ENGINEERS		
NIETEN VENEGAS PLLC 48 PURCHASE STREET EVE, NY 10586 T: (914) 967-8609		ROOFING CONSULTANT WATSKY ASSOCIATES 20 MADISON AVENUE VALHALLA, NY 10595 T: (914) 948-3458
CODE CONSULTANT		
MILROSE CONSULTING 500 SUMNER STREET, STE 501 STAMFORD, CT 06901 T: (203) 564-9991		SPECIFICATIONS CONSTRUCTION SPECIFICATIONS INC. PO BOX 480 MORGANVILLE, NJ 07751 T: (732) 970-0706
AV-IT-SEC CONSULTANT		
ROE INFINITY TECHNOLOGIES CORP. 116 WEST 32ND STREET NEW YORK, NY 10001 (212) 643-9055		
GEOTECHNICAL ENGINEER (BY OWNER)		
LANGAN CT, INC. 555 LONG WHARF DRIVE NEW HAVEN, CT 06593 (203) 562-5771		CIVIL ENGINEER (BY OWNER) RINNESS AND MEAD 22 FIRST STREET STAMFORD, CT 06905 (203) 562-9760

Stamp

Project Title
**KING SCHOOL
UPPER SCHOOL
CRI/COMMONS
ADDITION PROJECT**

1450 Newfield Avenue
Stamford, CT 06905

Drawing Title
**AUDIOVISUAL
COVER PAGE**



Scale	Job No.	Date	Drawing No.
NTS	12219.00	12-18-25	TA-001.00
Drawn	Checked	Approved	TA-001.00
--	--	--	- OF -


Peter Gisolfi Associates
Architects + Landscape Architects, LLP
566 Warburton Avenue
Hastings on Hudson, NY 10706
(914) 478-3677

PETER GISOLFI ASSOCIATES LLP




United Technologies Corp
116 West 32nd Street, 12th Floor | New York, N.Y. 10001
P 212.643.9055 | info@mgepc.net | www.mgeutc.com

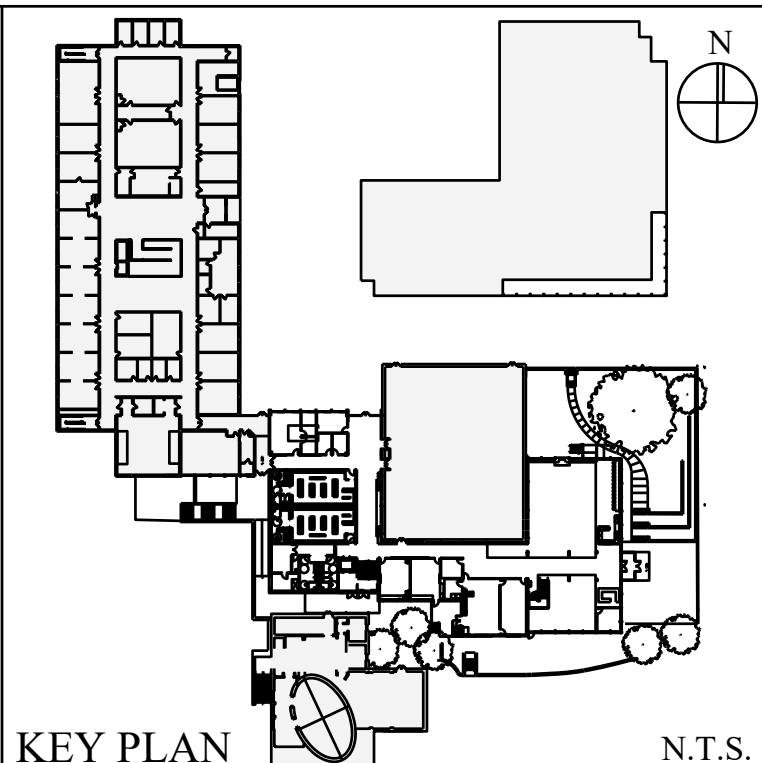[illegible]

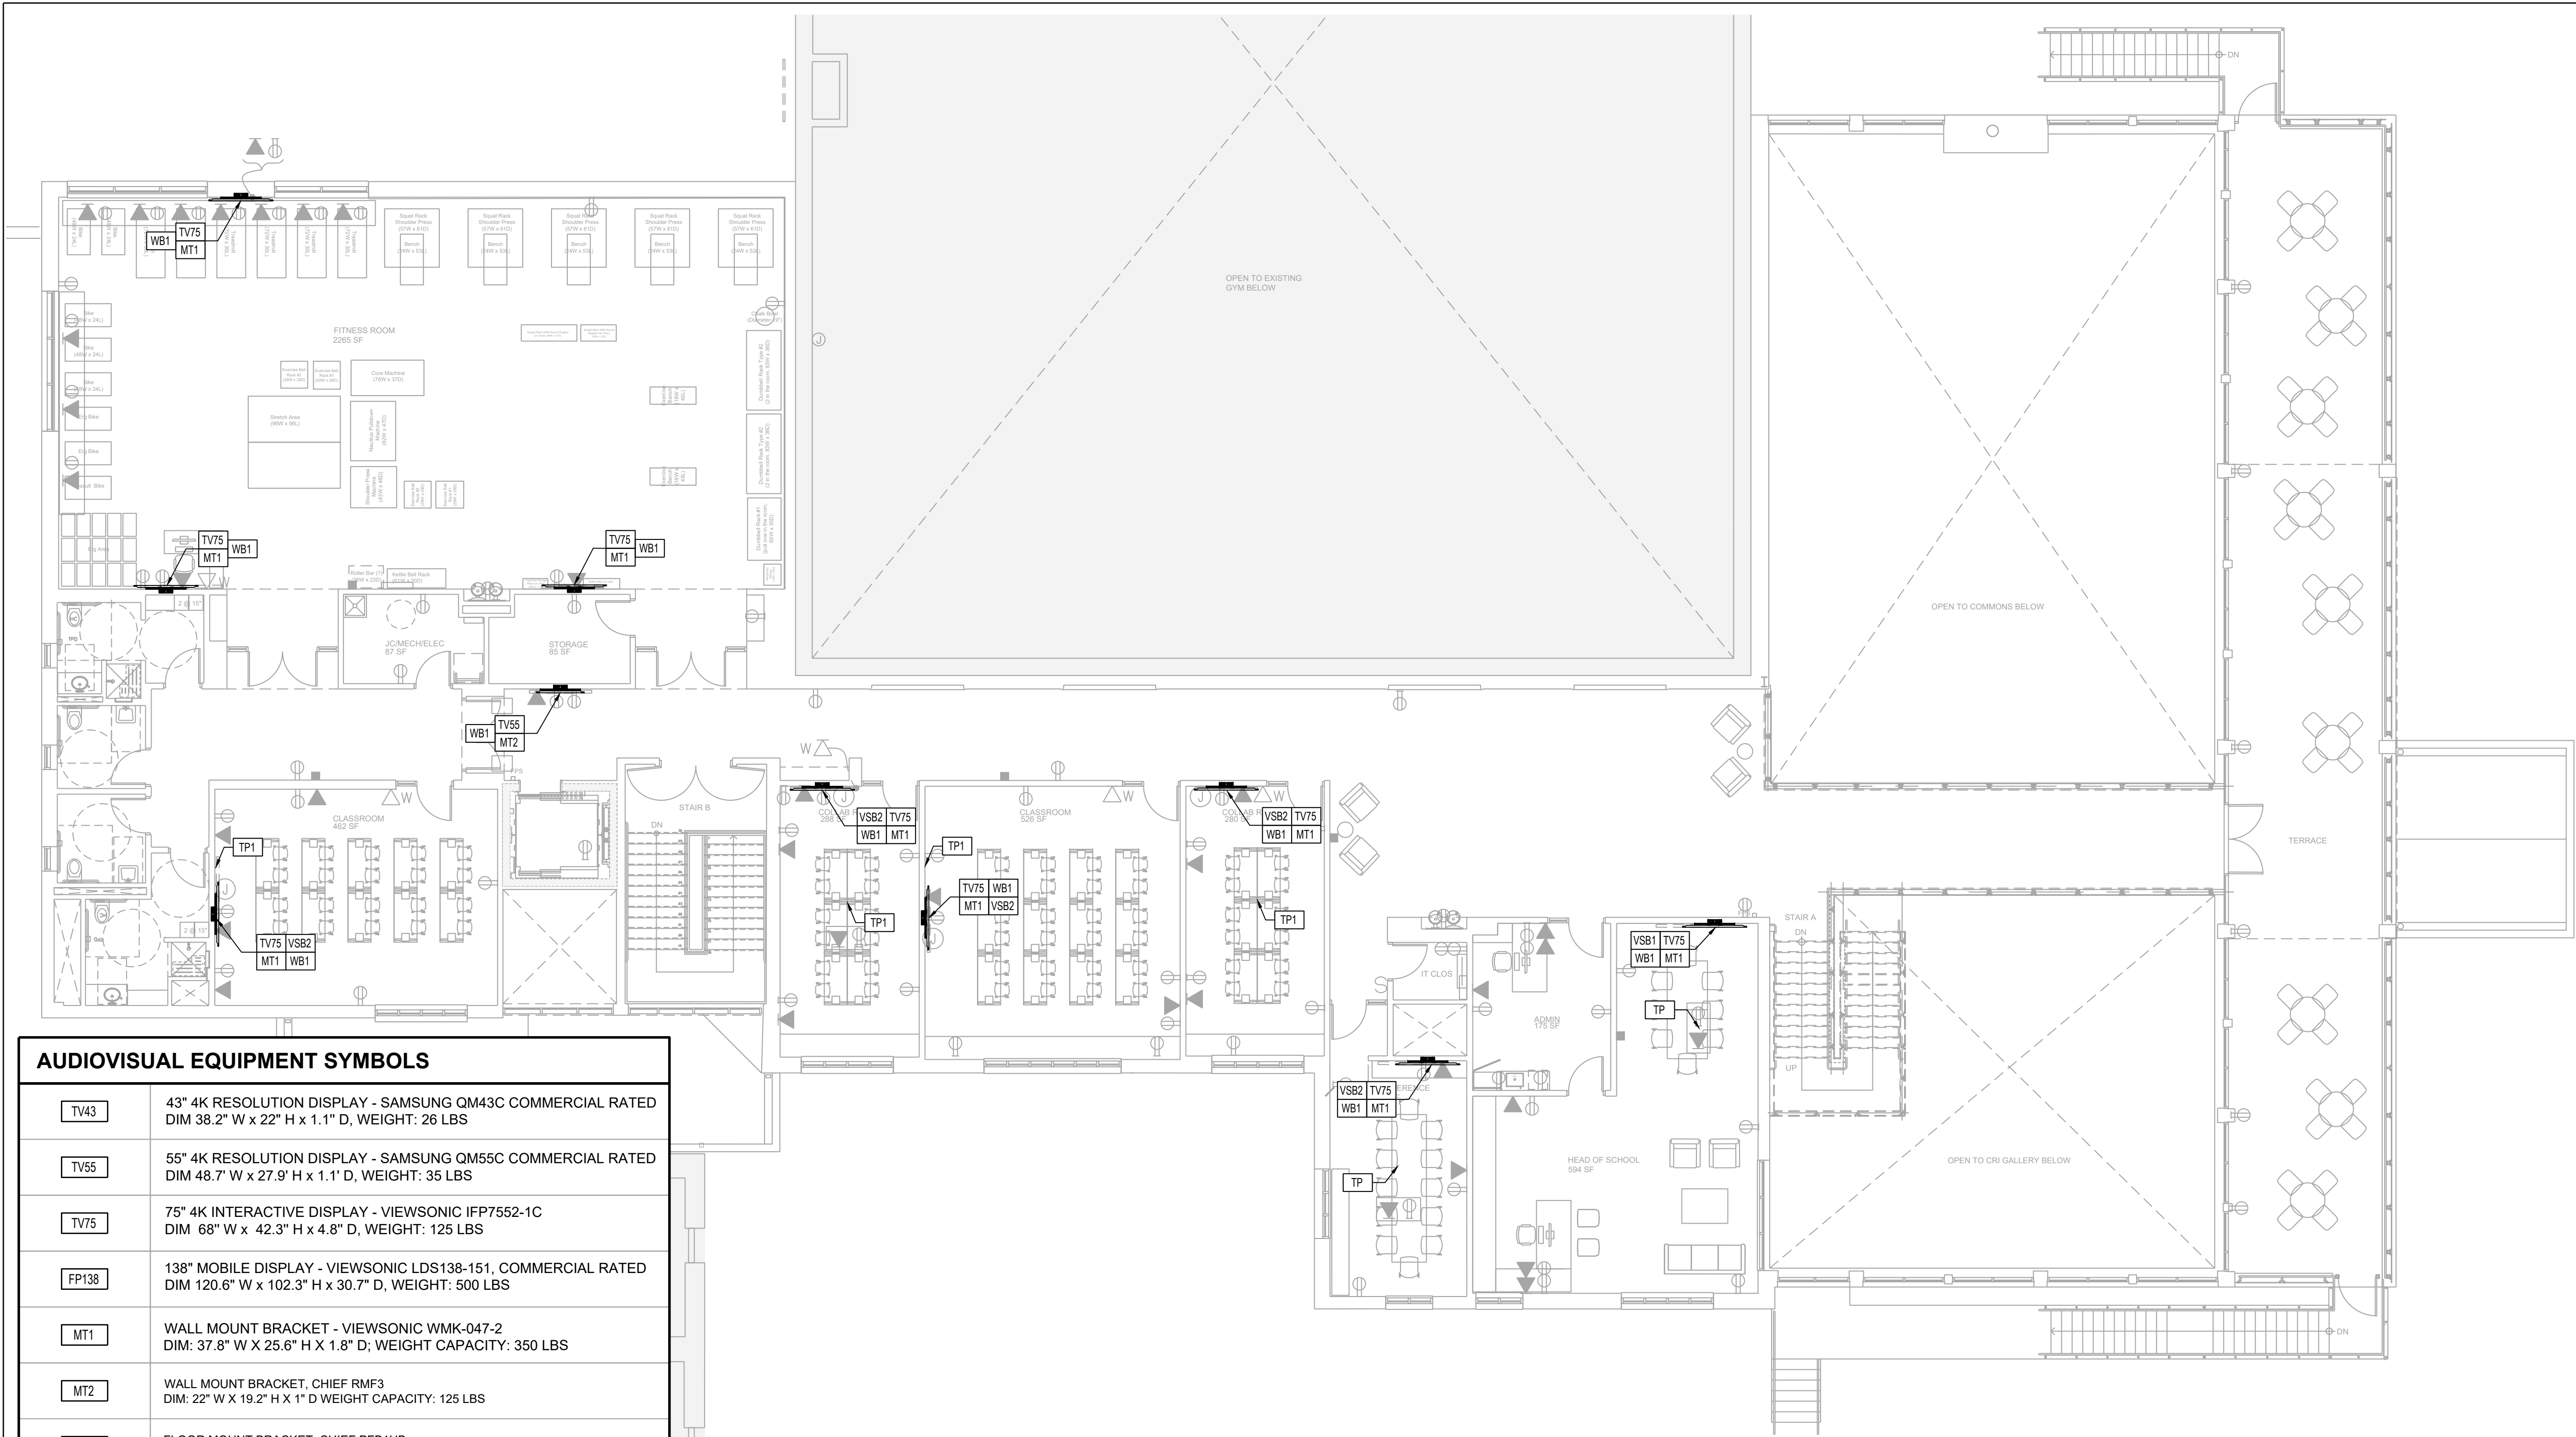

AUDIOVISUAL EQUIPMENT SYMBOLS

TV43	43" 4K RESOLUTION DISPLAY - SAMSUNG QM43C COMMERCIAL RATED DIM 38.2" W x 22" H x 1.1" D, WEIGHT: 26 LBS
TV55	55" 4K RESOLUTION DISPLAY - SAMSUNG QM55C COMMERCIAL RATED DIM 48.7" W x 27.9" H x 1.1" D, WEIGHT: 35 LBS
TV75	75" 4K INTERACTIVE DISPLAY - VIEWSONIC IFP7552-1C DIM 68" W x 42.3" H x 4.8" D, WEIGHT: 125 LBS
FP138	138" MOBILE DISPLAY - VIEWSONIC LDS138-151, COMMERCIAL RATED DIM 120.6" W x 102.3" H x 30.7" D, WEIGHT: 500 LBS
MT1	WALL MOUNT BRACKET - VIEWSONIC WMK-047-2 DIM: 37.8" W X 25.6" H X 1.8" D; WEIGHT CAPACITY: 350 LBS
MT2	WALL MOUNT BRACKET, CHIEF RMF3 DIM: 22" W X 19.2" H X 1" D WEIGHT CAPACITY: 125 LBS
MT3	FLOOR MOUNT BRACKET, CHIEF PFB1UB DIM: 38" W X 65" H X 8" D WEIGHT CAPACITY: 200 LBS
WB1	IN-WALL STORAGE BOX - CHIEF PAC 526F DIM: 14.25" W X 14.25" H X 3.9" D
VSB1	VIDEO SOUNDBAR, POLY X32 DIM: 22.7" W X 2.6" D X 3" H
VSB2	VIDEO SOUNDBAR, POLY X72 DIM: 33.1" W X 5.3" H X 4.6" D
CAM1	VIDEO CONFERENCE CAMERA - QSC NC-12X80 DIM: 6.7" W X 8" H X 5.6" D
SPK1	IN-CEILING SPEAKER - QSC AD-C8T-LP DIM: 13.4" W X 4" D, WEIGHT: 15 LBS
TP1	CONTROL PANEL, POLY TC10 DIM: 10.25"W X 7.25"D X 2.5"H WEIGHT: 2.8 LBS
TP2	CONTROL PANEL, QSC TSC-70-G3 DIM: 7.3"W X 4.5"D X 1.5"H
PRJ	4K VIDEO PROJECTOR - PANASONIC PT-REQ15 DIM: 19.7" W x 8.5" H x 25.5" D; WEIGHT: 65 LBS
PMT1	PROJECTOR MOUNT, CHIEF WMA2S & VCMU DIM: 24.5" L X 19.6" W X 11.5" H; WEIGHT CAPACITY: 150 LBS
SCRN	150" PROJECTION SCREEN, SCREEN INNOVATIONS ZERO-G DIM: 130.75" W x 73.6" H x 10.85" D, WEIGHT: 200 LBS
WP1	INPUT PLATE - USBC/HDMI - 1-GANG

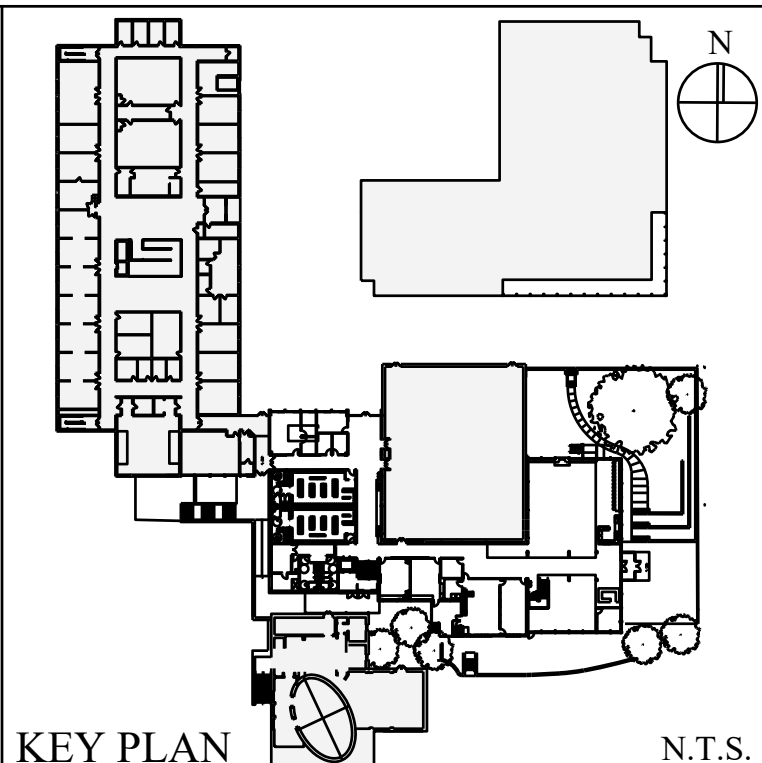

KEY PLAN N.T.S.

02/16/2026	ISSUE FOR CONSTRUCTION - BULLETIN 01	
01/19/2026	ISSUE FOR CONSTRUCTION - REVISED SCOPE	
01/19/2026	ISSUE FOR CONSTRUCTION	
No.	Date	Revision
ARCHITECT	PETER GISOLFI ASSOCIATES, LLP 566 WARBURTON AVENUE HASTINGS-ON-HUDSON, NY 10706 T: (914) 478-3677	STRUCTURAL ENGINEER DIRELLA CONSULTING ENGINEERS 143 MAIN STREET NEW YORK, NY 10960 T: (845) 727-7793
MEP ENGINEERS	NIETEN VENEGAS, PLLC 48 PURCHASE STREET EVELEVILLE, NY 10586 T: (914) 962-8509	ROOFING CONSULTANT WATSKY ASSOCIATES 20 MADISON AVENUE VALHALLA, NY 10595 T: (914) 948-3458
CODE CONSULTANT	MILROSE CONSULTING 500 SUMNER STREET, STE 501 STAMFORD, CT 06901 T: (203) 564-9991	SPECIFICATIONS CONSTRUCTION SPECIFICATIONS INC. PO BOX 480 MORGANVILLE, NJ 07751 T: (732) 970-0706
AV-IT-SEC CONSULTANT	UNIFIED TECHNOLOGIES CORP. 116 WEST 32ND STREET NEW YORK, NY 10001 (212) 643-9055	
GEOTECHNICAL ENGINEER (BY OWNER)	LANDJAN CT, INC. 555 LONG WHARF DRIVE NEW HAVEN, CT 06593 (203) 562-9771	CIVIL ENGINEER (BY OWNER) RIDNESS AND MEAD 22 FIRST STREET STAMFORD, CT 06905 (203) 327-0500

Stamp

Project Title
KING SCHOOL
UPPER SCHOOL
CRI/COMMONS
ADDITION PROJECT
1450 Newfield Avenue
Stamford, CT 06905


Drawing Title
2ND FLOOR
AUDIOVISUAL
PLAN

Scale	Job No.	Date	Drawing No.
1/8"=1'-0"	12219.00	12-18-25	TA-102.00
Drawn	Checked	Approved	
--	--	--	- OF -

Peter Gisolfi Associates
Architects • Landscape Architects, LLP
566 Warburton Avenue
Hastings on Hudson, NY 10706
(914) 478-3677


PETER GISOLFI ASSOCIATES LLP



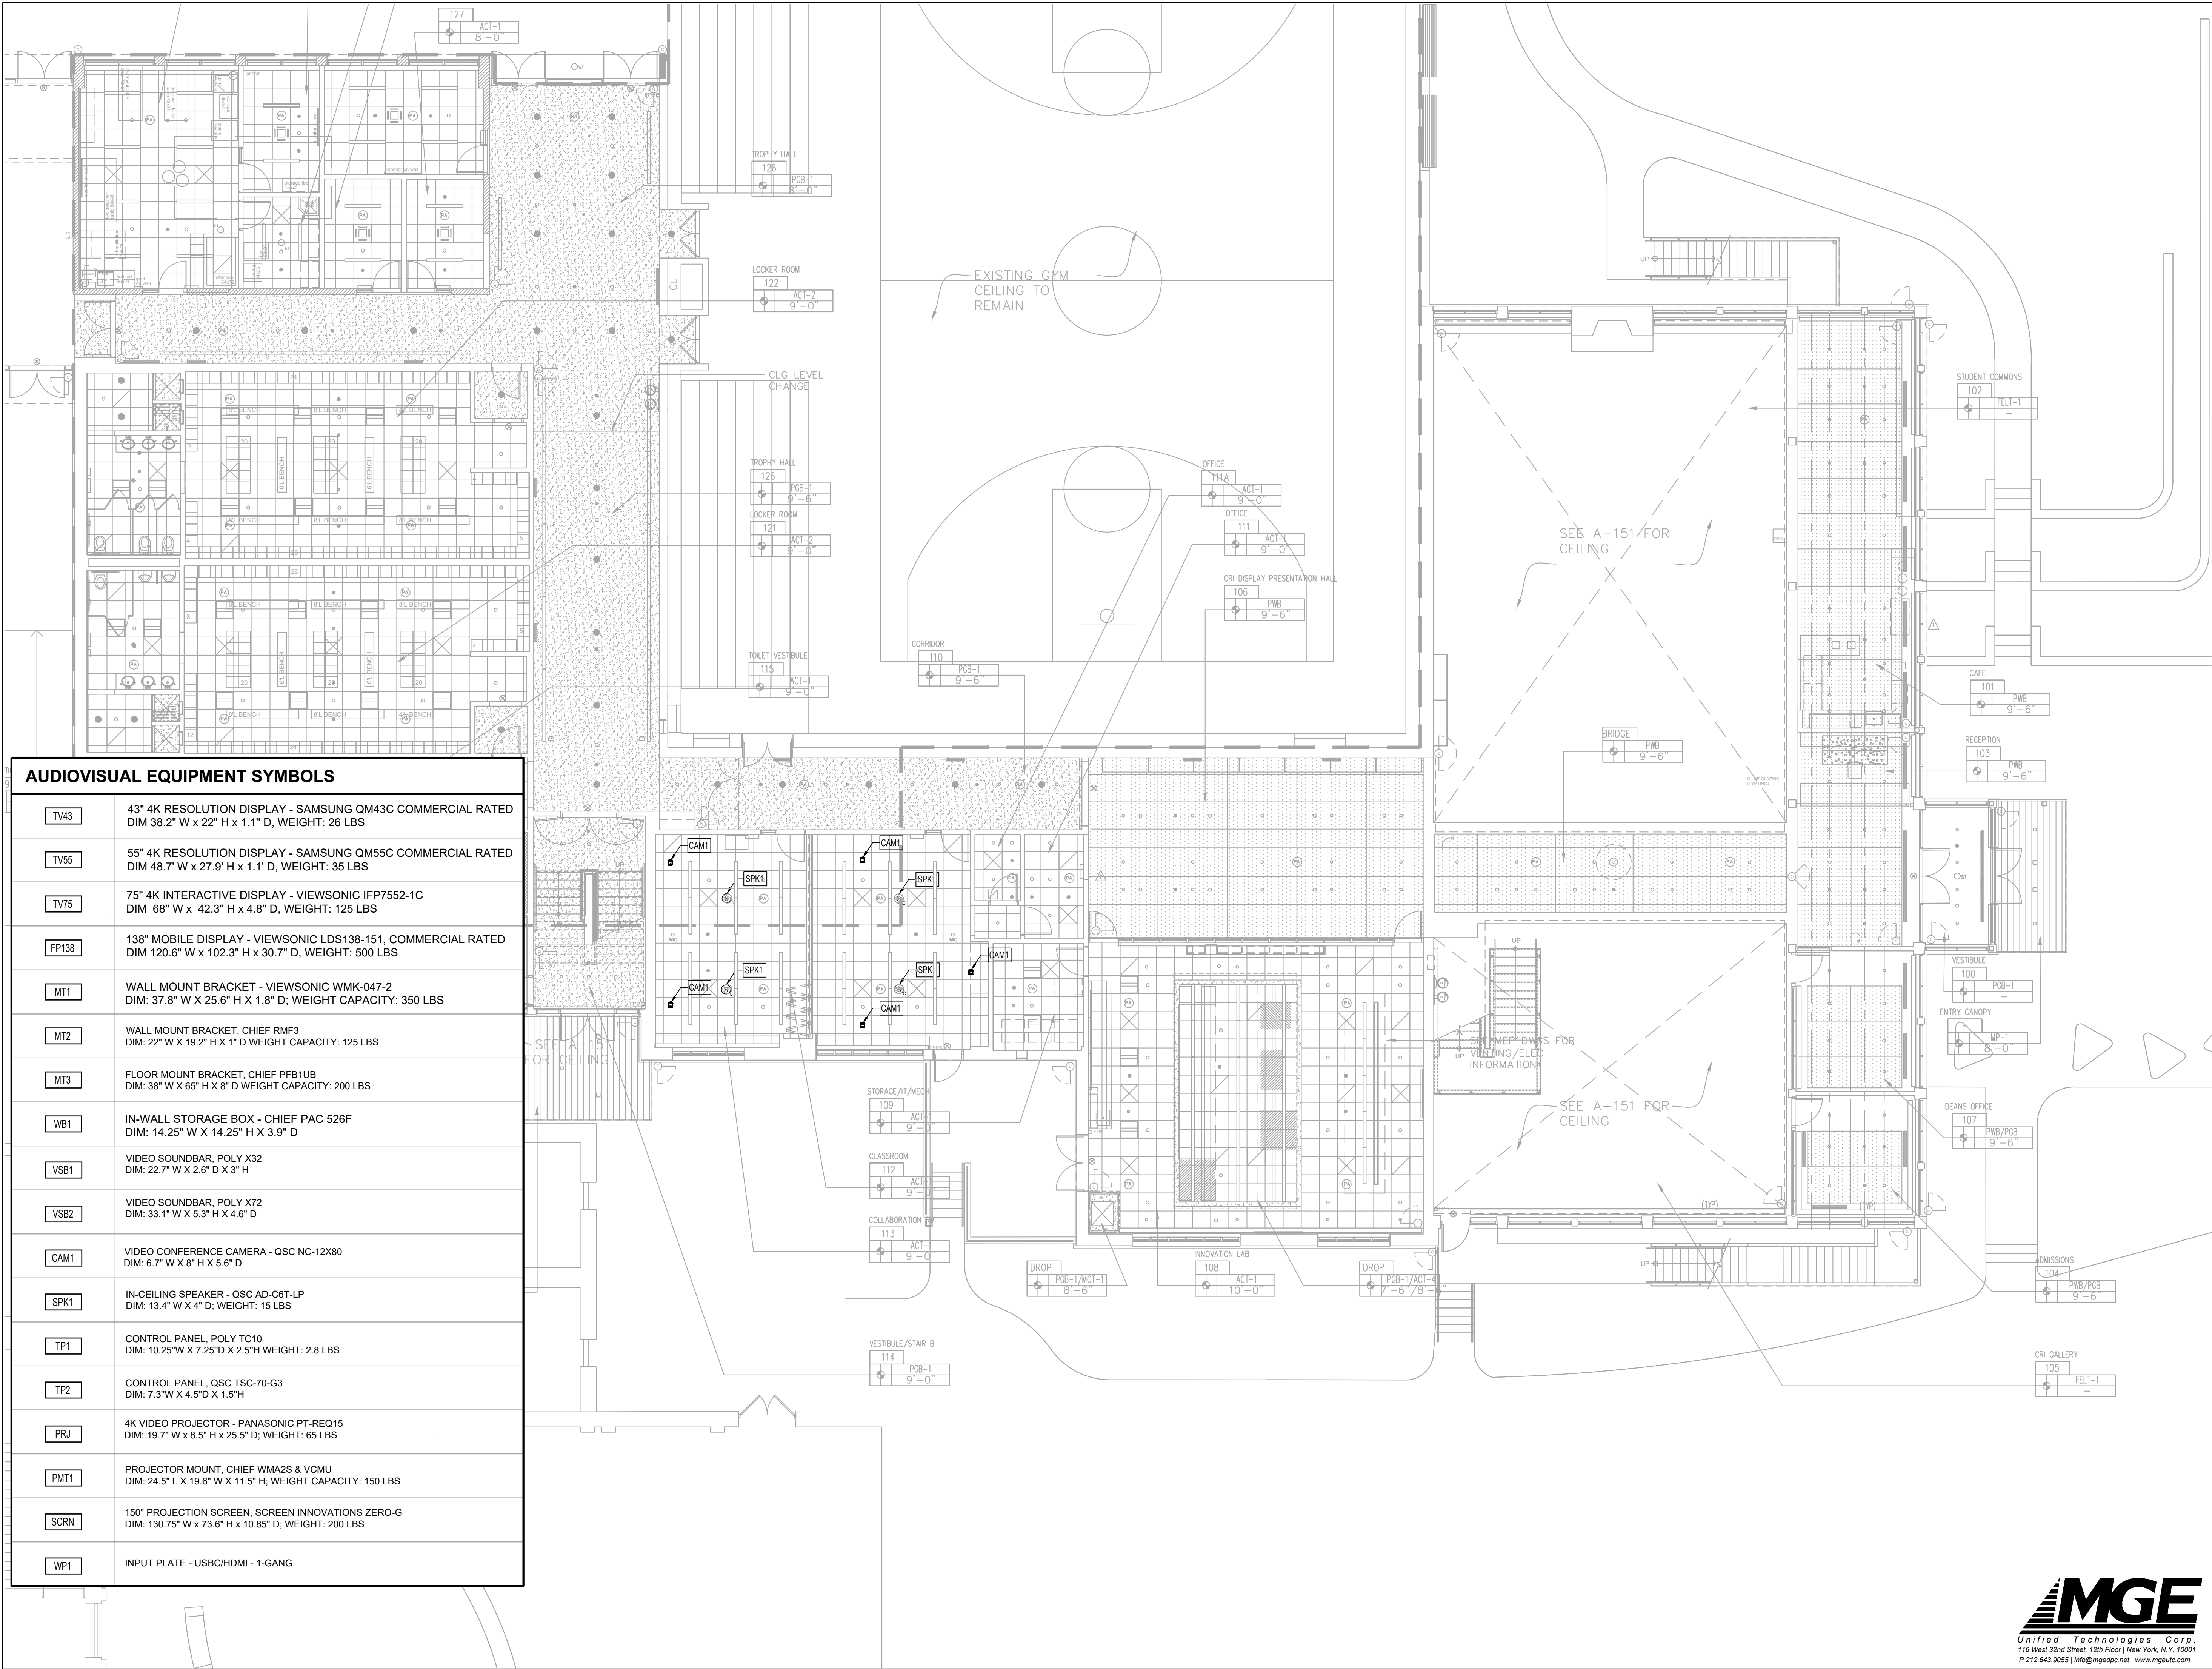

AUDIOVISUAL EQUIPMENT SYMBOLS

TV43	43" 4K RESOLUTION DISPLAY - SAMSUNG QM43C COMMERCIAL RATED DIM 38.2" W x 22" H x 1.1" D, WEIGHT: 26 LBS
TV55	55" 4K RESOLUTION DISPLAY - SAMSUNG QM55C COMMERCIAL RATED DIM 48.7" W x 27.9" H x 1.1" D, WEIGHT: 35 LBS
TV75	75" 4K INTERACTIVE DISPLAY - VIEWSONIC IFP7552-1C DIM 68" W x 42.3" H x 4.8" D, WEIGHT: 125 LBS
FP138	138" MOBILE DISPLAY - VIEWSONIC LDS138-151, COMMERCIAL RATED DIM 120.6" W x 102.3" H x 30.7" D, WEIGHT: 500 LBS
MT1	WALL MOUNT BRACKET - VIEWSONIC WMK-047-2 DIM: 37.8" W X 25.6" H X 1.8" D; WEIGHT CAPACITY: 350 LBS
MT2	WALL MOUNT BRACKET, CHIEF RMF3 DIM: 22" W X 19.2" H X 1" D WEIGHT CAPACITY: 125 LBS
MT3	FLOOR MOUNT BRACKET, CHIEF PFB1UB DIM: 38" W X 65" H X 8" D WEIGHT CAPACITY: 200 LBS
WB1	IN-WALL STORAGE BOX - CHIEF PAC 526F DIM: 14.25" W X 14.25" H X 3.9" D
VSB1	VIDEO SOUNDBAR, POLY X32 DIM: 22.7" W X 2.6" D X 3" H
VSB2	VIDEO SOUNDBAR, POLY X72 DIM: 33.1" W X 5.3" H X 4.6" D
CAM1	VIDEO CONFERENCE CAMERA - QSC NC-12X80 DIM: 6.7" W X 8" H X 5.6" D
SPK1	IN-CEILING SPEAKER - QSC AD-C6T-LP DIM: 13.4" W X 4" D; WEIGHT: 15 LBS
TP1	CONTROL PANEL, POLY TC10 DIM: 10.25"W X 7.25"D X 2.5"H WEIGHT: 2.8 LBS
TP2	CONTROL PANEL, QSC TSC-70-G3 DIM: 7.3"W X 4.5"D X 1.5"H
PRJ	4K VIDEO PROJECTOR - PANASONIC PT-REQ15 DIM: 19.7" W x 8.5" H x 25.5" D; WEIGHT: 65 LBS
PMT1	PROJECTOR MOUNT, CHIEF WMA2S & VCMU DIM: 24.5" L X 19.6" W X 11.5" H; WEIGHT CAPACITY: 150 LBS
SCRN	150" PROJECTION SCREEN, SCREEN INNOVATIONS ZERO-G DIM: 130.75" W x 73.6" H x 10.85" D; WEIGHT: 200 LBS
WP1	INPUT PLATE - USBC/HDMI - 1-GANG

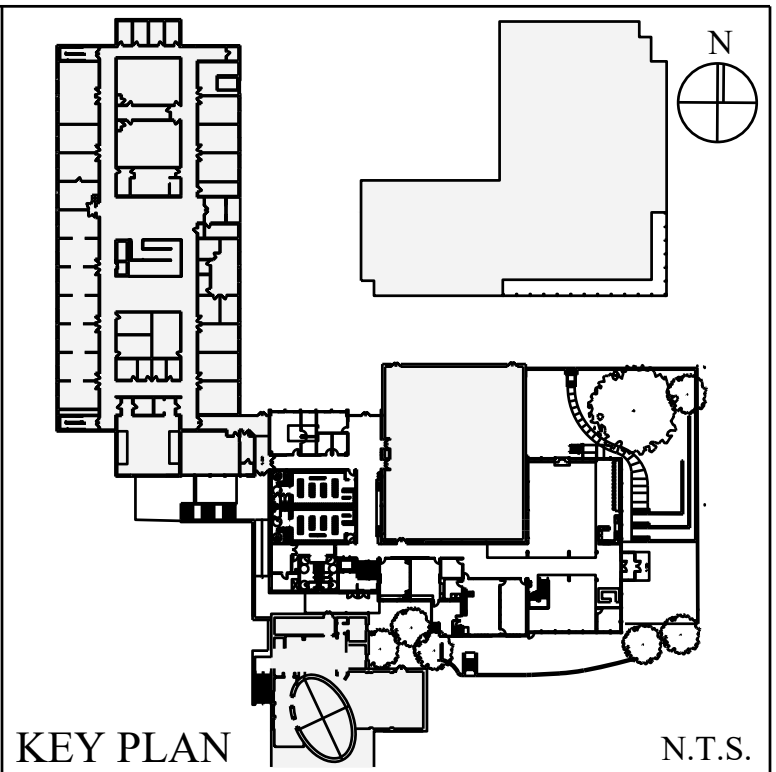

KEY PLAN N.T.S.

	02/16/2026	ISSUE FOR CONSTRUCTION - BULLETIN 01
	01/19/2026	ISSUE FOR CONSTRUCTION - REVISED SCOPE
	01/19/2026	ISSUE FOR CONSTRUCTION
No.	Date	Revision
ARCHITECT	PETER GISOLFI ASSOCIATES, LLP 566 WARBURTON AVENUE HASTINGS-ON-HUDSON, NY 10706 T: (914) 478-3677	STRUCTURAL ENGINEER DIRELLA CONSULTING ENGINEERS 143 MAIN STREET NY ACK, NY 10960 T: (845) 727-7793
MEP ENGINEERS	MEHLEN VENGALA, PLLC 48 PURCHASE STREET RYE, NY 10580 T: (914) 962-8509	ROOFING CONSULTANT WATSKY ASSOCIATES 20 MADISON AVENUE VALHALLA, NY 10595 T: (914) 948-3458
CODE CONSULTANT	MILROSE CONSULTING 500 SUMNER STREET, STE 501 STAMFORD, CT 06901 T: (203) 564-9991	SPECIFICATIONS CONSTRUCTION SPECIFICATIONS INC. PO BOX 480 MORGANVILLE, NJ 07751 T: (732) 970-0706
A-V-T-SEE CONSULTANT	WIDEWINTER TECHNOLOGIES CORP. 116 WEST 32ND STREET NEW YORK, NY 10001 (212) 643-9055	CIVIL ENGINEER (BY OWNER) RIBBINS AND MEAD 22 FIRST STREET STAMFORD, CT 06905 (203) 327-0500
GEOTECHNICAL ENGINEER (BY OWNER)	LANDAN CT, INC. 555 LONG WHARF DRIVE NEW HAVEN, CT 06595 (203) 562-9771	

Project Title
**KING SCHOOL
UPPER SCHOOL
CRI/COMMONS
ADDITION PROJECT**
1450 Newfield Avenue
Stamford, CT 06905


Drawing Title
**1ST FLOOR
AUDIOVISUAL
RCP PLAN**

Scale	Job No.	Date	Drawing No.
1/8"=1'-0"	12219.00	12-18-25	TA-201.00
Drawn	Checked	Approved	
--	--	--	- OF -

Peter Gisolfi Associates
Architects • Landscape Architects, LLP
566 Warburton Avenue
Hastings on Hudson, NY 10706
(914) 478-3677

PETER GISOLFI ASSOCIATES LLP



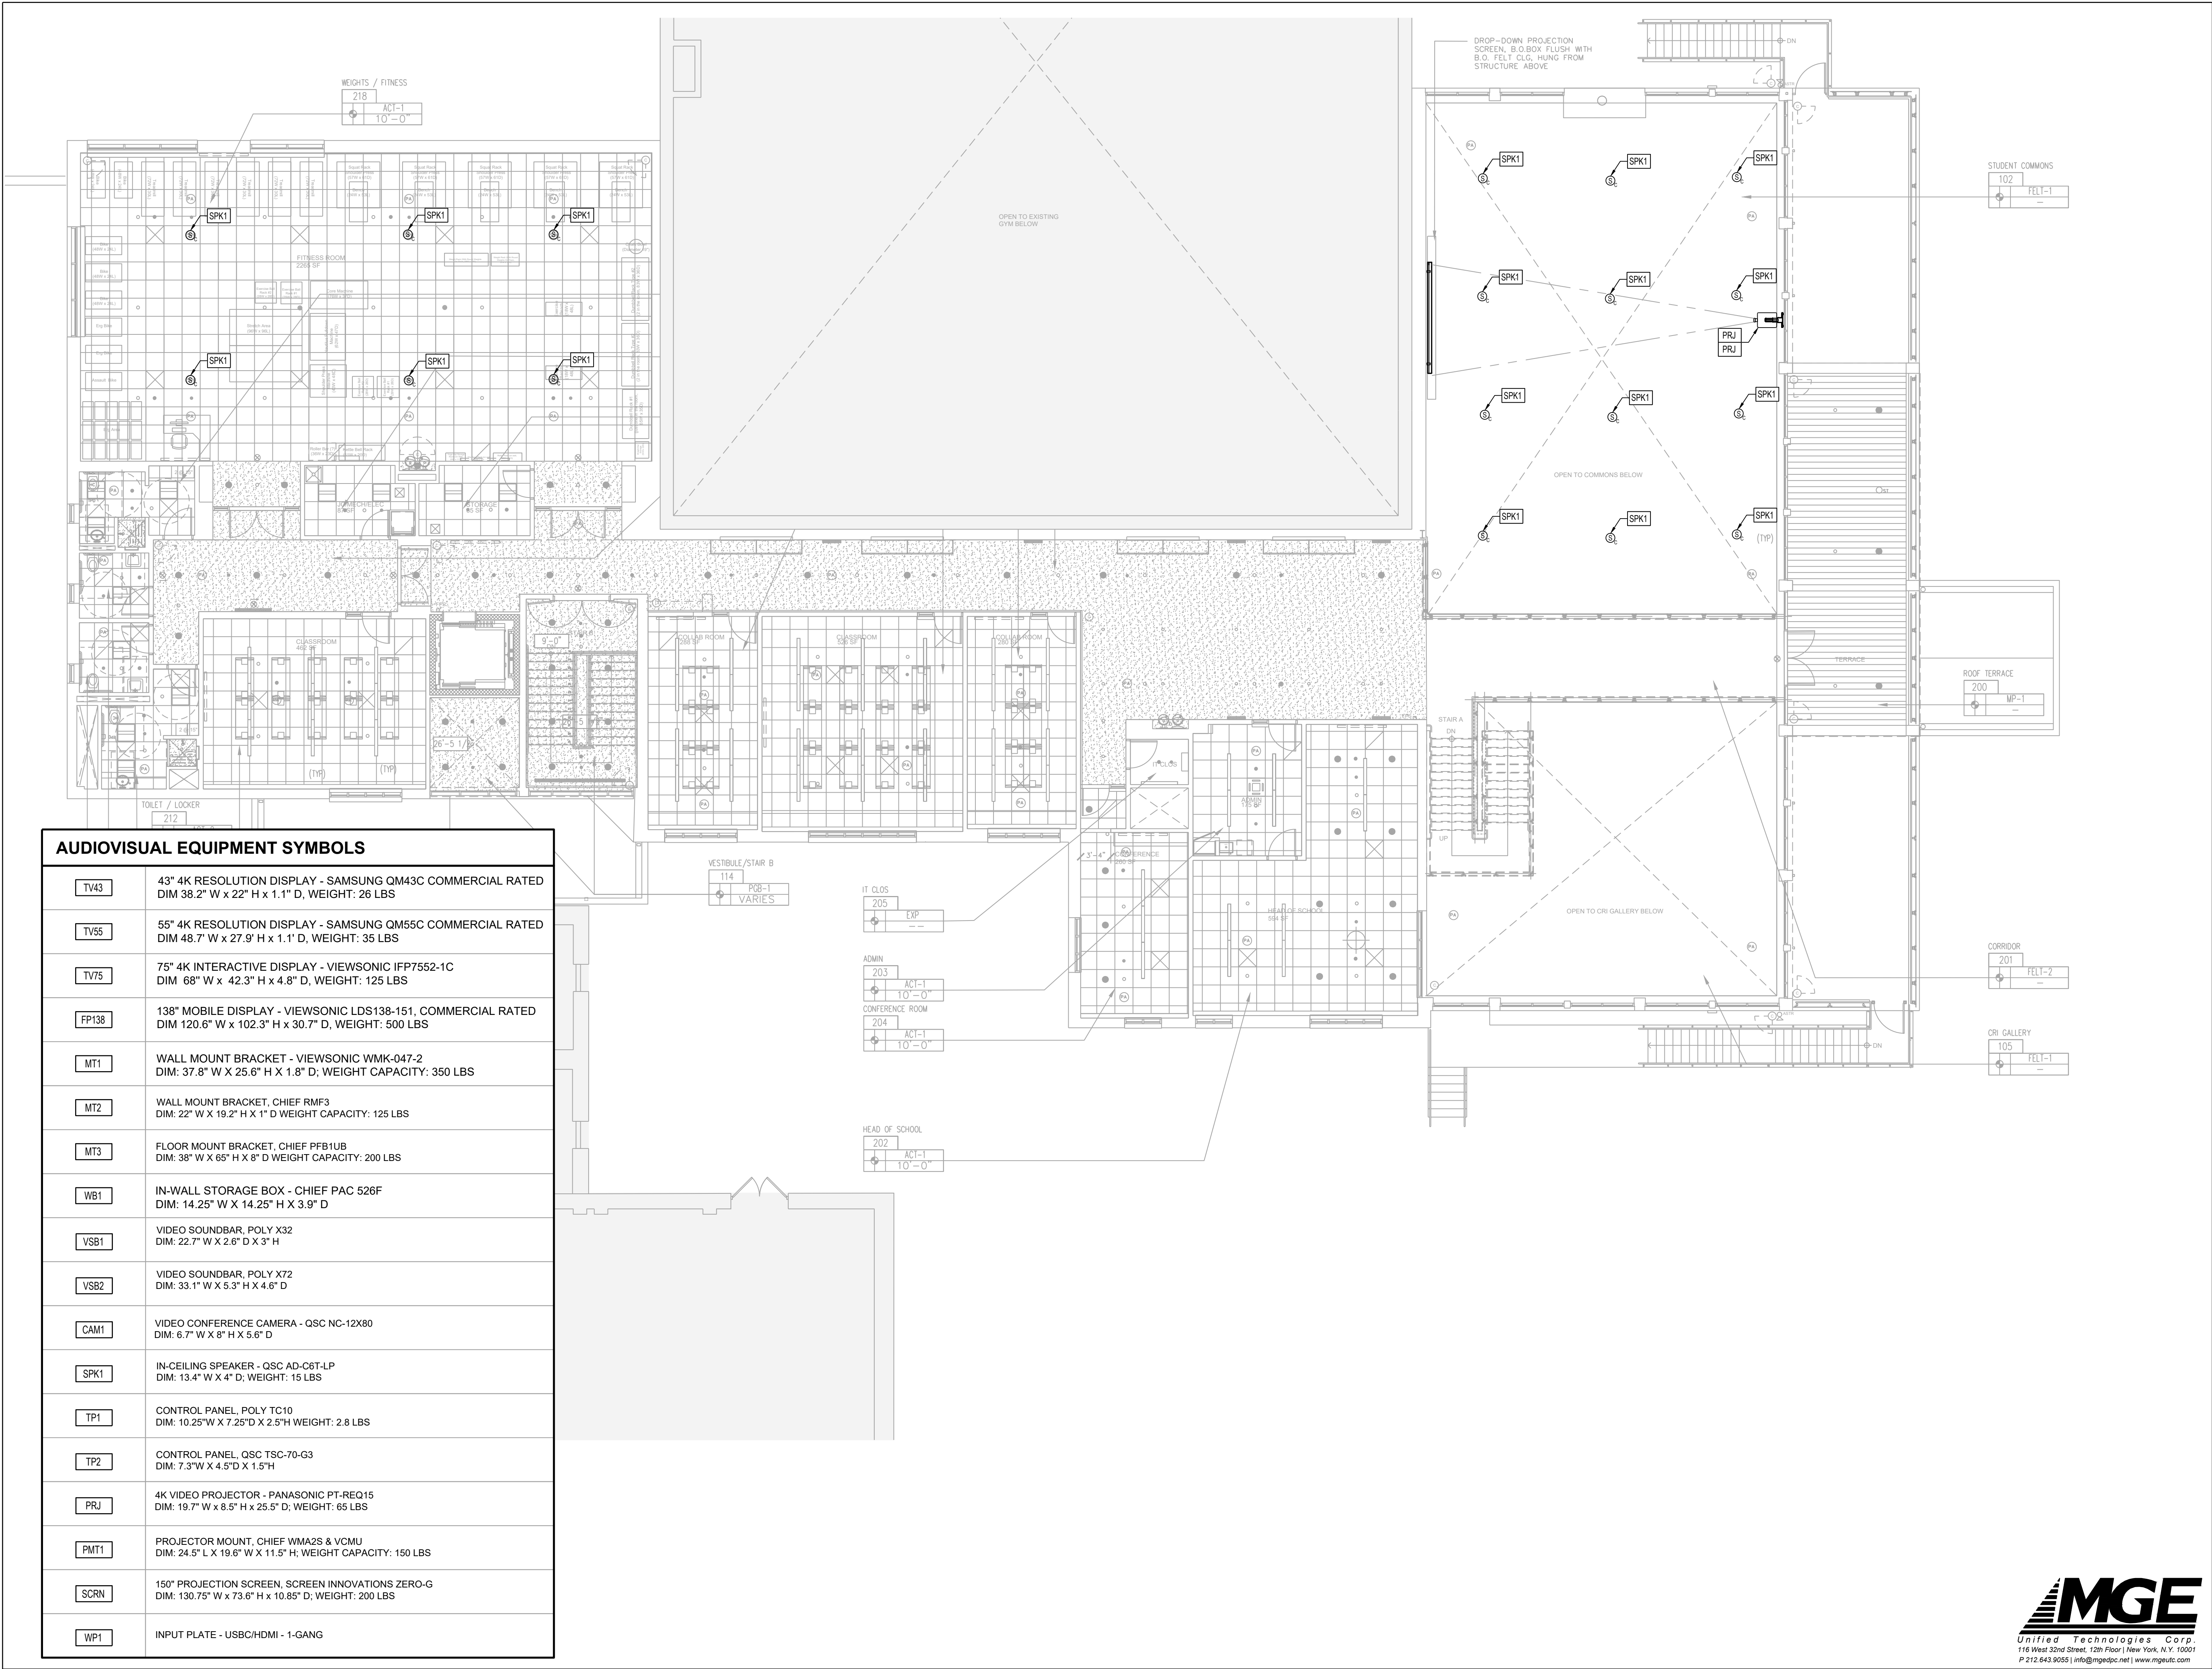

AUDIOVISUAL EQUIPMENT SYMBOLS	
TV43	43" 4K RESOLUTION DISPLAY - SAMSUNG QM43C COMMERCIAL RATED DIM 38.2" W x 22" H x 1.1" D, WEIGHT: 26 LBS
TV55	55" 4K RESOLUTION DISPLAY - SAMSUNG QM55C COMMERCIAL RATED DIM 48.7" W x 27.9" H x 1.1" D, WEIGHT: 35 LBS
TV75	75" 4K INTERACTIVE DISPLAY - VIEWSONIC IFP7552-1C DIM 68" W x 42.3" H x 4.8" D, WEIGHT: 125 LBS
FP138	138" MOBILE DISPLAY - VIEWSONIC LDS138-151, COMMERCIAL RATED DIM 120.6" W x 102.3" H x 30.7" D, WEIGHT: 500 LBS
MT1	WALL MOUNT BRACKET - VIEWSONIC WMK-047-2 DIM: 37.8" W X 25.6" H X 1.8" D; WEIGHT CAPACITY: 350 LBS
MT2	WALL MOUNT BRACKET, CHIEF RMF3 DIM: 22" W X 19.2" H X 1" D WEIGHT CAPACITY: 125 LBS
MT3	FLOOR MOUNT BRACKET, CHIEF PFB1UB DIM: 38" W X 65" H X 8" D WEIGHT CAPACITY: 200 LBS
WB1	IN-WALL STORAGE BOX - CHIEF PAC 526F DIM: 14.25" W X 14.25" H X 3.9" D
VSB1	VIDEO SOUNDBAR, POLY X32 DIM: 22.7" W X 2.6" D X 3" H
VSB2	VIDEO SOUNDBAR, POLY X72 DIM: 33.1" W X 5.3" H X 4.6" D
CAM1	VIDEO CONFERENCE CAMERA - QSC NC-12X80 DIM: 6.7" W X 8" H X 5.6" D
SPK1	IN-CEILING SPEAKER - QSC AD-C6T-LP DIM: 13.4" W X 4" D; WEIGHT: 15 LBS
TP1	CONTROL PANEL, POLY TC10 DIM: 10.25"W X 7.25"D X 2.5"H WEIGHT: 2.8 LBS
TP2	CONTROL PANEL, QSC TSC-70-G3 DIM: 7.3"W X 4.5"D X 1.5"H
PRJ	4K VIDEO PROJECTOR - PANASONIC PT-REQ15 DIM: 19.7" W x 8.5" H x 25.5" D; WEIGHT: 65 LBS
PMT1	PROJECTOR MOUNT, CHIEF WMA2S & VCMU DIM: 24.5" L X 19.6" W X 11.5" H; WEIGHT CAPACITY: 150 LBS
SCRN	150" PROJECTION SCREEN, SCREEN INNOVATIONS ZERO-G DIM: 130.75" W x 73.6" H x 10.85" D; WEIGHT: 200 LBS
WP1	INPUT PLATE - USBC/HDMI - 1-GANG

KEY PLAN

N.T.S.

02/16/2026

ISSUE FOR CONSTRUCTION - BULLETIN 01

01/19/2026

ISSUE FOR CONSTRUCTION - REVISED SCOPE

01/19/2026

ISSUE FOR CONSTRUCTION

No.	Date	Revision	
ARCHITECT	PETER GISOLFI ASSOCIATES, LLP	STRUCTURAL ENGINEER	
166 WARBURTON AVENUE	HASTINGS-ON-HUDSON, NY 10706	143 MAIN STREET	NY ACK, NY 10960
T: (914) 478-3677		T: (845) 727-7793	
MEP ENGINEERS	WATSKY ASSOCIATES	ROOFING CONSULTANT	WATSKY ASSOCIATES
20 MADISON AVENUE	VALHALLA, NY 10989	T: (914) 948-3458	
CODE CONSULTANT	MILROSE CONSULTING	SPECIFICATIONS	CONSTRUCTION SPECIFICATIONS INC.
PO BOX 480	MORGANVILLE, NJ 07751	T: (732) 970-0706	
AV/IT-SEC CONSULTANT	UNIFIED TECHNOLOGIES CORP.	CIVIL ENGINEER (BY OWNER)	RINNESS AND MEAD
116 WEST 32ND STREET	NEW YORK, NY 10001	22 FIRST STREET	STAMFORD, CT 06905
(212) 643-9055		(203) 327-0500	
GEOTECHNICAL ENGINEER (BY OWNER)	LANGAN CT, INC.		
255 LONG WHARF DRIVE	NEW HAVEN, CT 06515		
(203) 562-9771			

Stamp

Project Title

KING SCHOOL

UPPER SCHOOL

CRI/COMMONS

ADDITION PROJECT

1450 Newfield Avenue

Stamford, CT 06905

Drawing Title

2ND FLOOR

AUDIOVISUAL

RCP PLAN

Scale	Job No.	Date	Drawing No.
1/8"=1'-0"	12219.00	12-18-25	TA-202.00
Drawn	Checked	Approved	
--	--	--	- OF -

Peter Gisolfi Associates

Architects • Landscape Architects, LLP

566 Warburton Avenue

Hastings on Hudson, NY 10706

(914) 478-3677


MGE

Unified Technologies Corp.


116 West 32nd Street, 12th Floor | New York, N.Y. 10001

P 212.643.9055 | info@mgepc.net | www.mgepc.com

PETER GISOLFI ASSOCIATES LLP

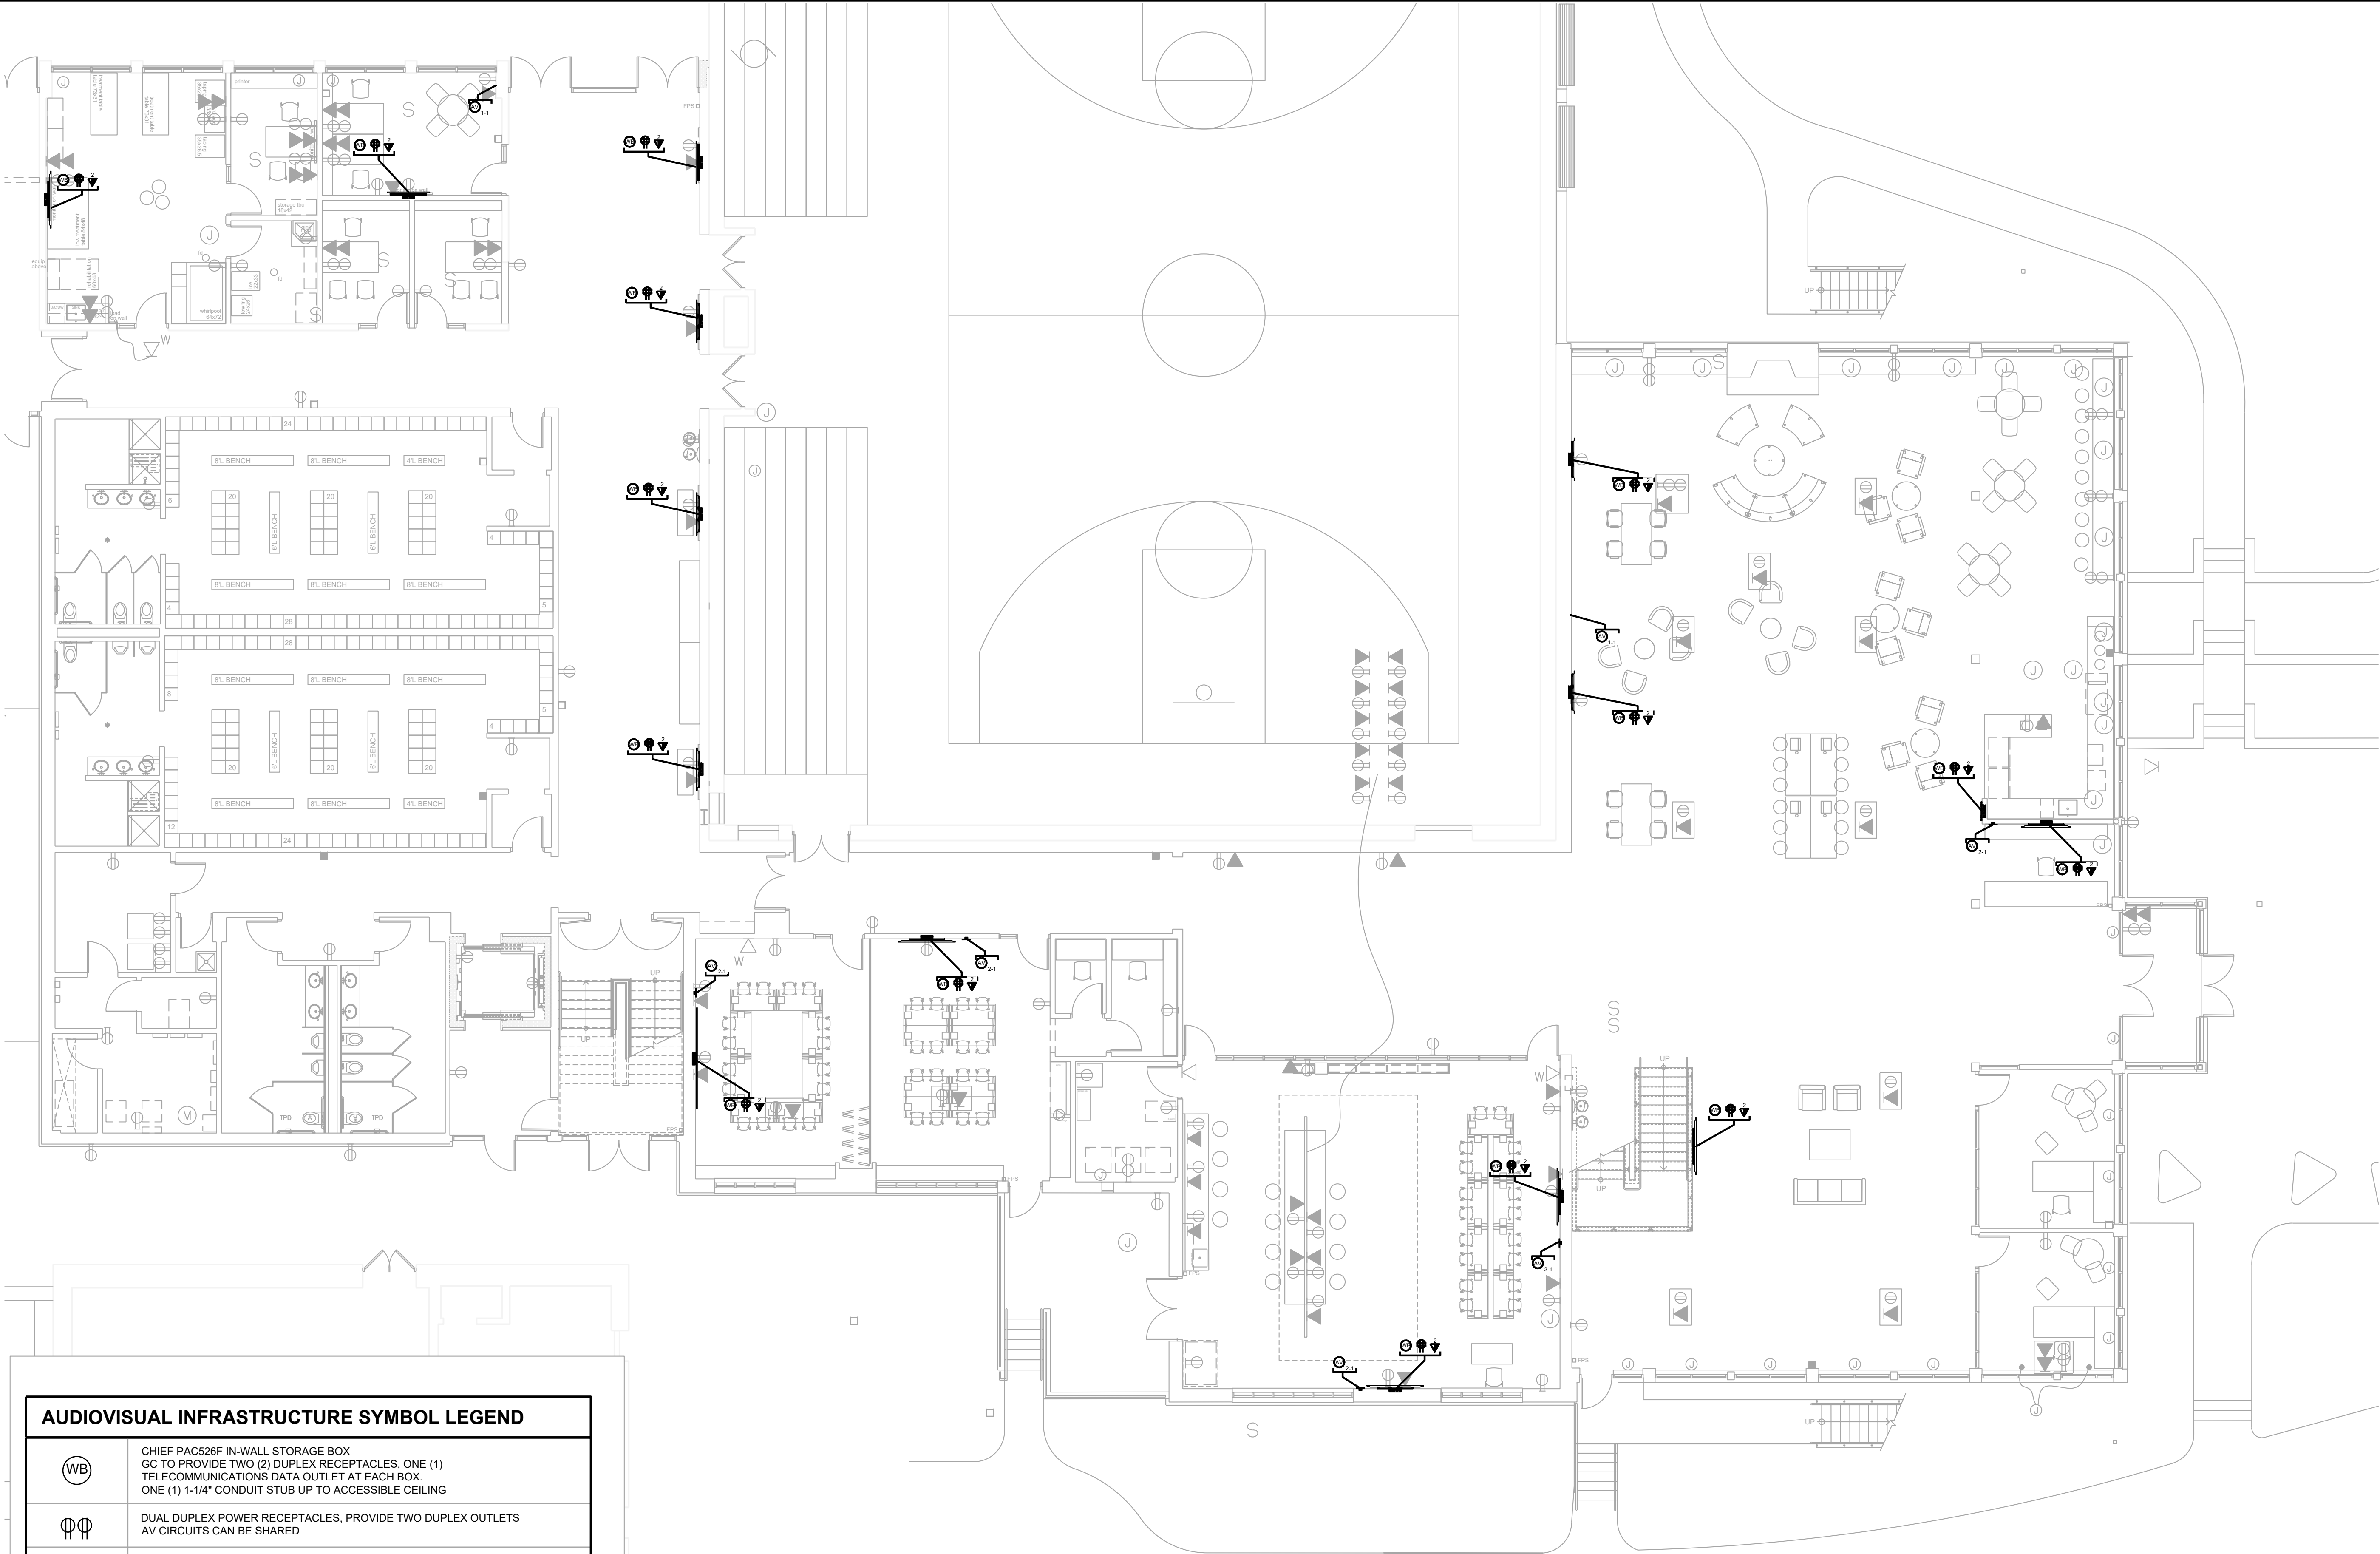

AUDIOVISUAL INFRASTRUCTURE SYMBOL LEGEND	
	CHIEF PAC526F IN-WALL STORAGE BOX GC TO PROVIDE TWO (2) DUPLEX RECEPTACLES, ONE (1) TELECOMMUNICATIONS DATA OUTLET AT EACH BOX. ONE (1) 1-1/4" CONDUIT STUB UP TO ACCESSIBLE CEILING
	DUAL DUPLEX POWER RECEPTACLES, PROVIDE TWO DUPLEX OUTLETS AV CIRCUITS CAN BE SHARED
	DUPLEX POWER RECEPTACLES CEILING MOUNTED, PROVIDE TWO DUPLEX OUTLETS AV CIRCUITS CAN BE SHARED
	TEL/DATA DATA OUTLET (REFER TO TC DRAWINGS FOR DETAILS)
	CEILING TEL/DATA DATA OUTLET (REFER TO TC DRAWINGS FOR DETAILS)
	TEL/DATA DATA OUTLET FOR ROOM SCHEDULER (REFER TO TC DRAWINGS FOR DETAILS)
	CONFERENCE TABLE IN-FEED / POKE-THRU DEVICE BY E.C. X: QUANTITY OF 1-1/4" CONDUIT(S) FROM TABLE TO AV WALL BOX
	WALL RECESSED JUNCTION BOX BY E.C. INSTALL AT STANDARD AFF, U.O.N. X: GANG SIZE OF JUNCTION BOX Y: QUANTITY OF 1-1/4" CONDUITS FOR AUDIOVISUAL

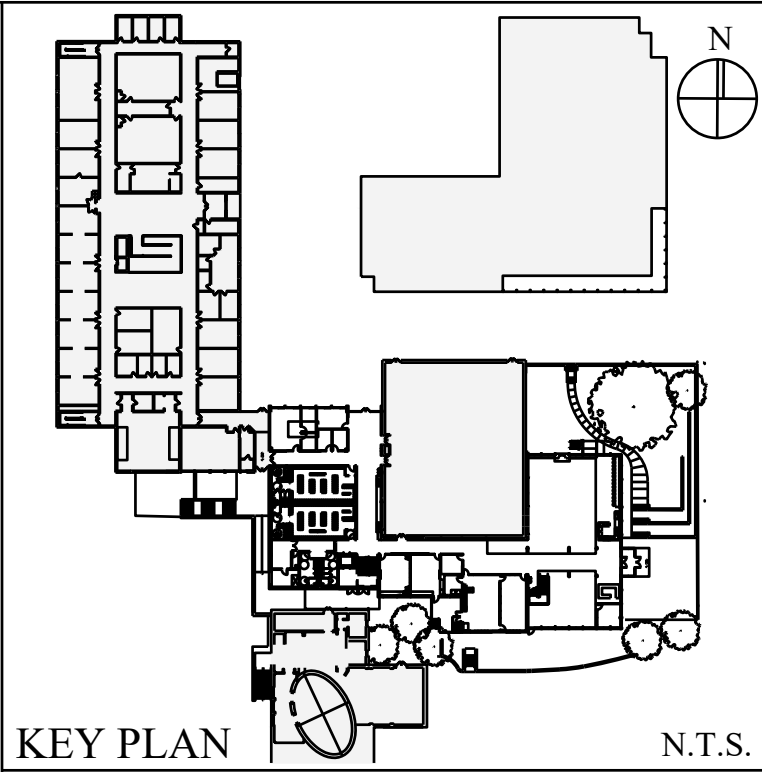

	02/16/2026	ISSUE FOR CONSTRUCTION - BULLETIN 01
	01/19/2026	ISSUE FOR CONSTRUCTION - REVISED SCOPE
	01/19/2026	ISSUE FOR CONSTRUCTION
No.	Date	Revision
ARCHITECT PETER GISOLFI ASSOCIATES, LLP 566 W ARBURTON AVENUE HASTINGS-ON-HUDSON, NY 10706 T: (914) 478-3677		
MEP ENGINEERS NIETEN YENIGAL, PLLC 48 PURCHASE STREET EVE, NY 10580 T: (914) 962-8509		
CODE CONSULTANT MILROSE CONSULTING 500 SUMNER STREET, STE 501 STAMFORD, CT 06901 T: (203) 564-9991		
AV/IT-SEC CONSULTANT ROE UNIFIED TECHNOLOGIES CORP. 116 WEST 32ND STREET NEW YORK, NY 10001 (212) 643-9055		
GEOTECHNICAL ENGINEER (BY OWNER) LANGAN CT, INC. 555 LONG WHARF DRIVE NEW HAVEN, CT 06595 (203) 562-9771		
STRUCTURAL ENGINEER DRIELLA CONSULTING ENGINEERS 143 MAIN STREET NY ACK, NY 10960 T: (845) 727-7793		
ROOFING CONSULTANT WATSKY ASSOCIATES 20 MADISON AVENUE VALHALLA, NY 10595 T: (914) 948-3450		
SPECIFICATIONS CONSTRUCTION SPECIFICATIONS INC. PO BOX 400 MORGANVILLE, NJ 07751 T: (732) 970-0700		
CIVIL ENGINEER (BY OWNER) RHINESS AND MEAD 22 FIRST STREET STAMFORD, CT 06905 (203) 327-0500		

Project Title
**KING SCHOOL
UPPER SCHOOL
CRI/COMMONS
ADDITION PROJECT**
1450 Newfield Avenue
Stamford, CT 06905

Drawing Title
**1ST FLOOR
AUDIOVISUAL
INFRASTRUCTURE PLAN**

Scale	Job No.	Date	Drawing No.
1/8"=1'-0"	12219.00	12-18-25	TAE-101.00
Drawn	Checked	Approved	
--	--	--	- OF -

Peter Gisolfi Associates
Architects • Landscape Architects, LLP
566 Warburton Avenue
Hastings on Hudson, NY 10706
(914) 478-3677

PETER GISOLFI ASSOCIATES LLP




amp


AUDIOVISUAL INFRASTRUCTURE SYMBOL LEGEND	
	CHIEF PAC528F IN-WALL STORAGE BOX GC TO PROVIDE TWO (2) DUPLEX RECEPTACLES, ONE (1) TELECOMMUNICATIONS DATA OUTLET AT EACH BOX. ONE (1) 1-1/4" CONDUIT STUB UP TO ACCESSIBLE CEILING
	DUAL DUPLEX POWER RECEPTACLES, PROVIDE TWO DUPLEX OUTLETS AV CIRCUITS CAN BE SHARED
	DUPLEX POWER RECEPTACLES CEILING MOUNTED, PROVIDE TWO DUPLEX OUTLETS AV CIRCUITS CAN BE SHARED
	TEL/DATA DATA OUTLET (REFER TO TC DRAWINGS FOR DETAILS)
	CEILING TEL/DATA DATA OUTLET (REFER TO TC DRAWINGS FOR DETAILS)
	TEL/DATA DATA OUTLET FOR ROOM SCHEDULER (REFER TO TC DRAWINGS FOR DETAILS)
 X	CONFERENCE TABLE IN-FEED / POKE-THRU DEVICE BY E.C. X: QUANTITY OF 1-1/4" CONDUIT(S) FROM TABLE TO AV WALL BOX
 X-Y	WALL RECESSED JUNCTION BOX BY E.C. INSTALL AT STANDARD AFF, U.O.N. X: GANG SIZE OF JUNCTION BOX Y: QUANTITY OF 1-1/4" CONDUITS FOR AUDIOVISUAL

Project Title KING SCHOOL			
UPPER SCHOOL CRI/COMMONS ADDITION PROJECT			
1450 Newfield Avenue Stamford, CT 06905			
Drawing Title 2ND FLOOR			
AUDIOVISUAL PLAN			
Scale 8"=1'-0"	Job No. 12219	Date 12-18-25	Drawing No. TA-102.00
Drawn -	Checked --	Approved 	- OF -
Peter Gisolfi Associates Architects • Landscape Architects, LLP 46 Warburton Avenue Easton, NJ 07006 (414) 478-3677			
PETER GISOLFI ASSOCIATES LLP			




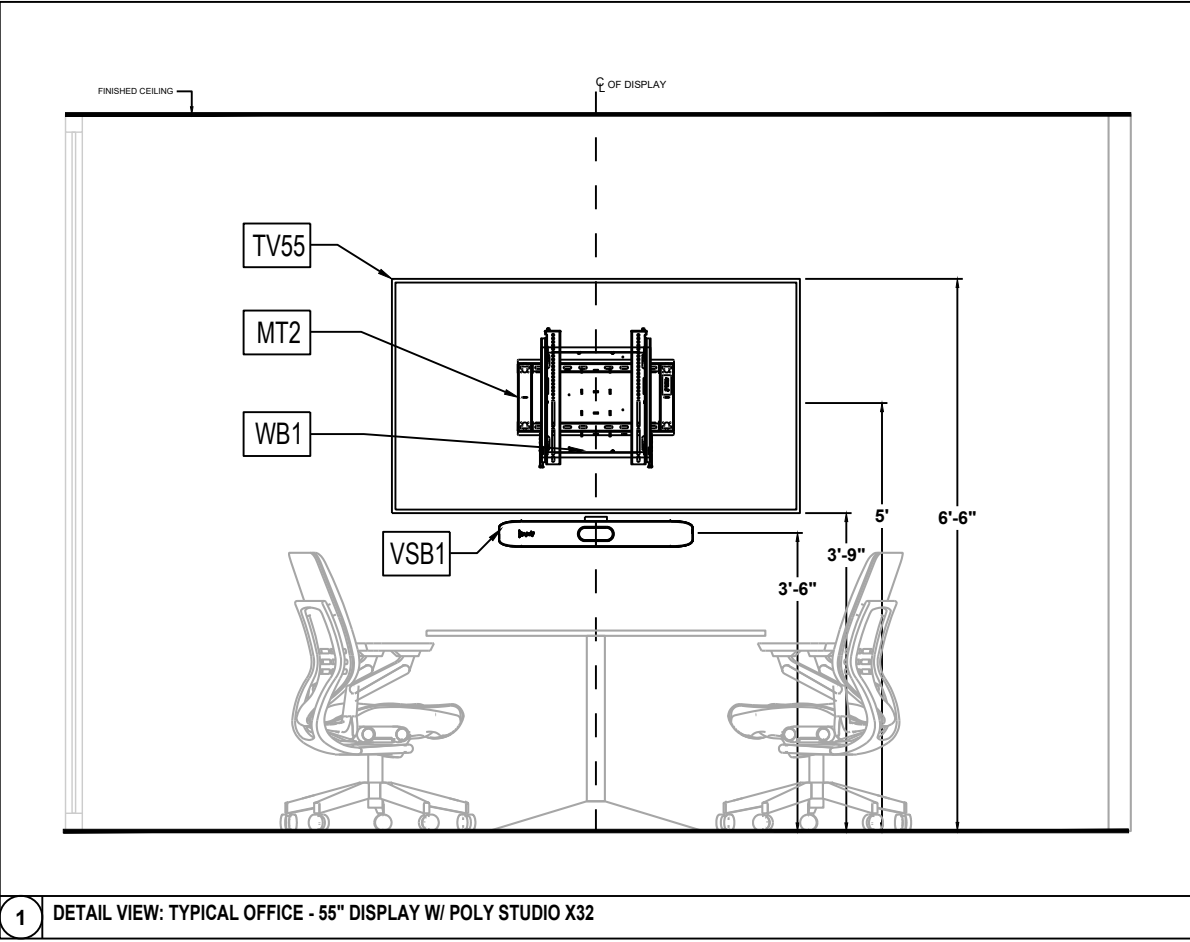


1 DETAIL VIEW: TYPICAL OFFICE - 55" DISPLAY W/ POLY STUDIO X32

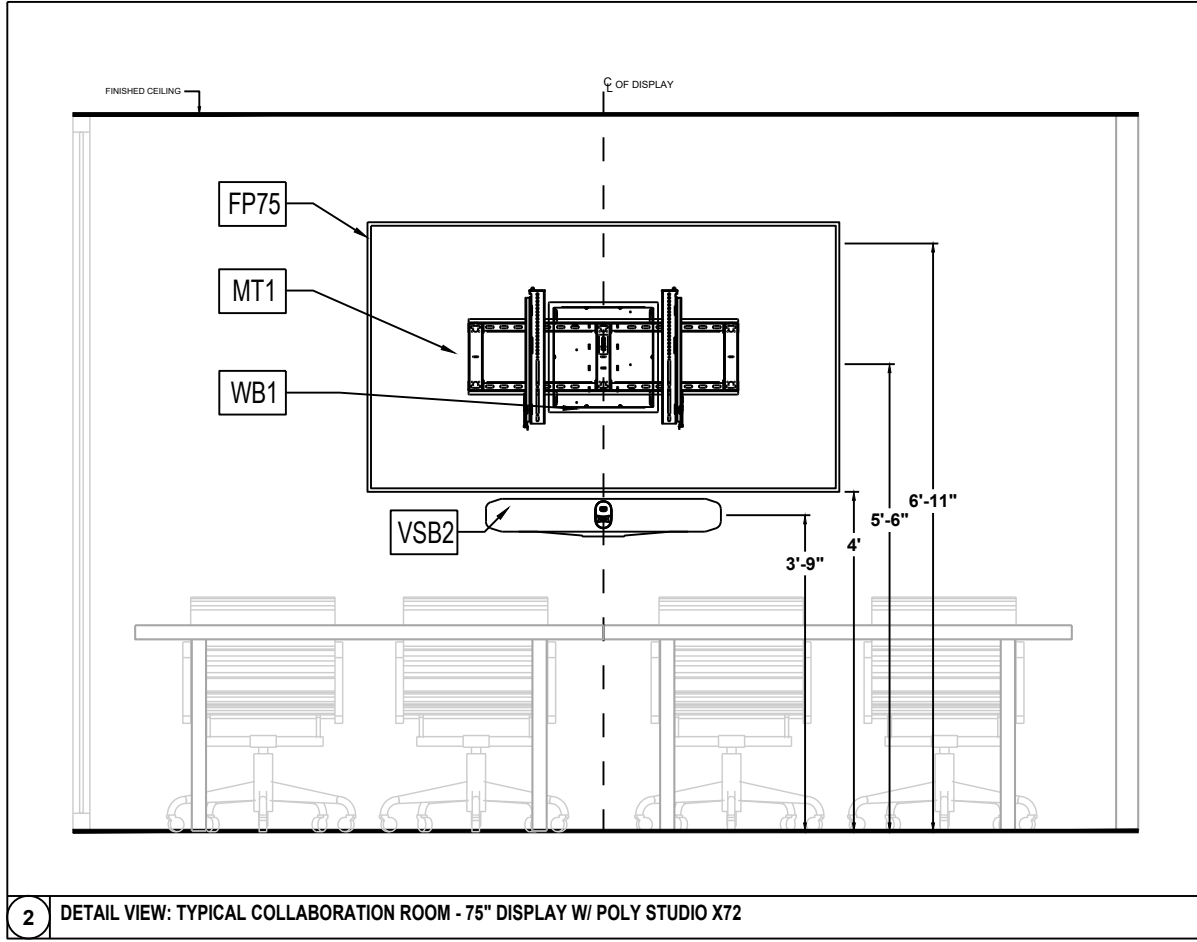


2 DETAIL VIEW: TYPICAL COLLABORATION ROOM - 75" DISPLAY W POLY STUDIO X72

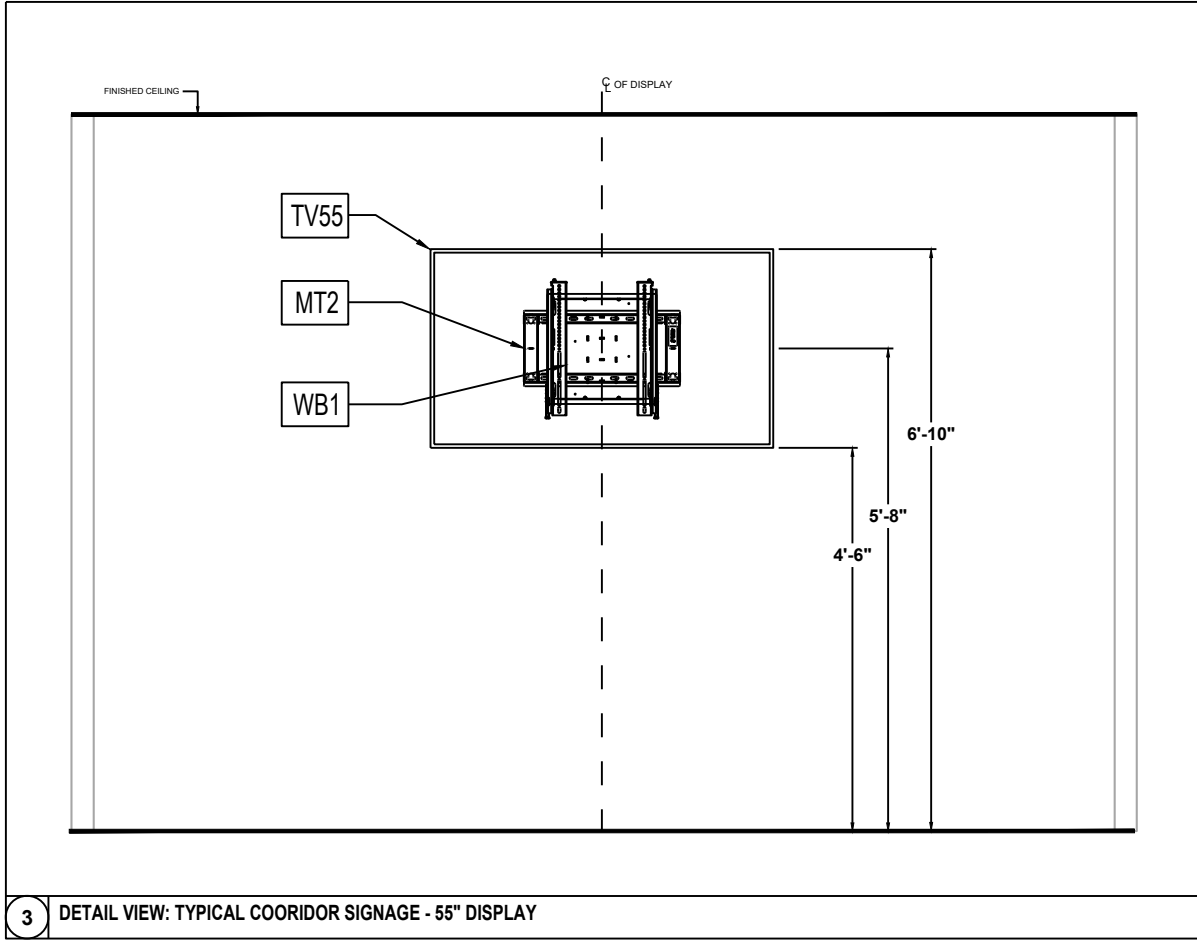


3 DETAIL VIEW: TYPICAL COORIDOR SIGNAGE - 55" DISPLAY

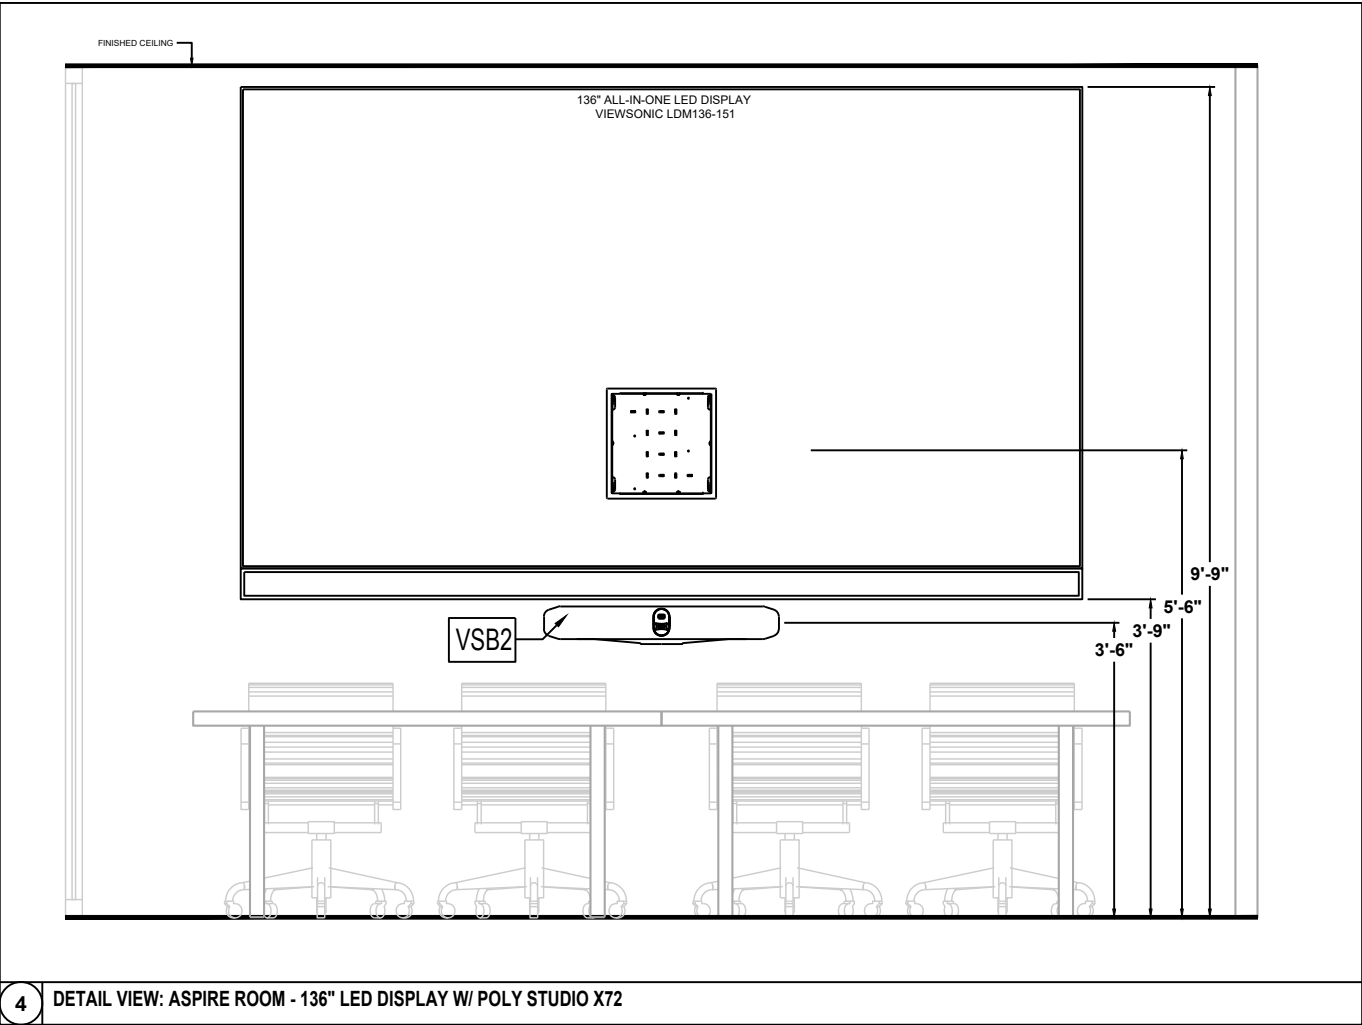


4 DETAIL VIEW: ASPIRE ROOM - 136" LED DISPLAY W/ POLY STUDIO X72

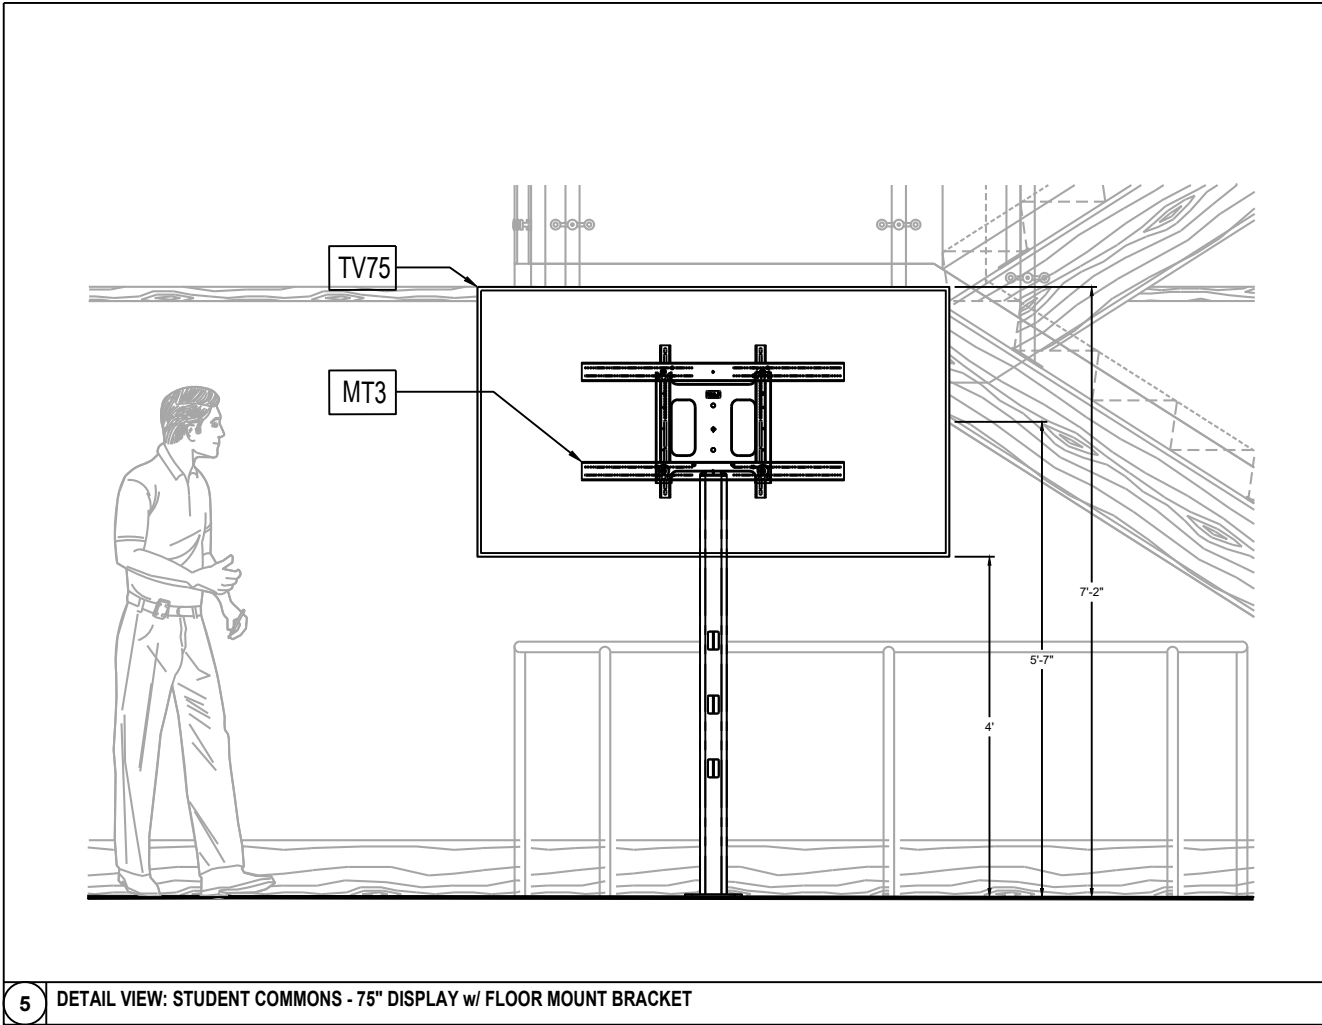


5 DETAIL VIEW: STUDENT COMMONS - 75" DISPLAY w/ FLOOR MOUNT BRACKET

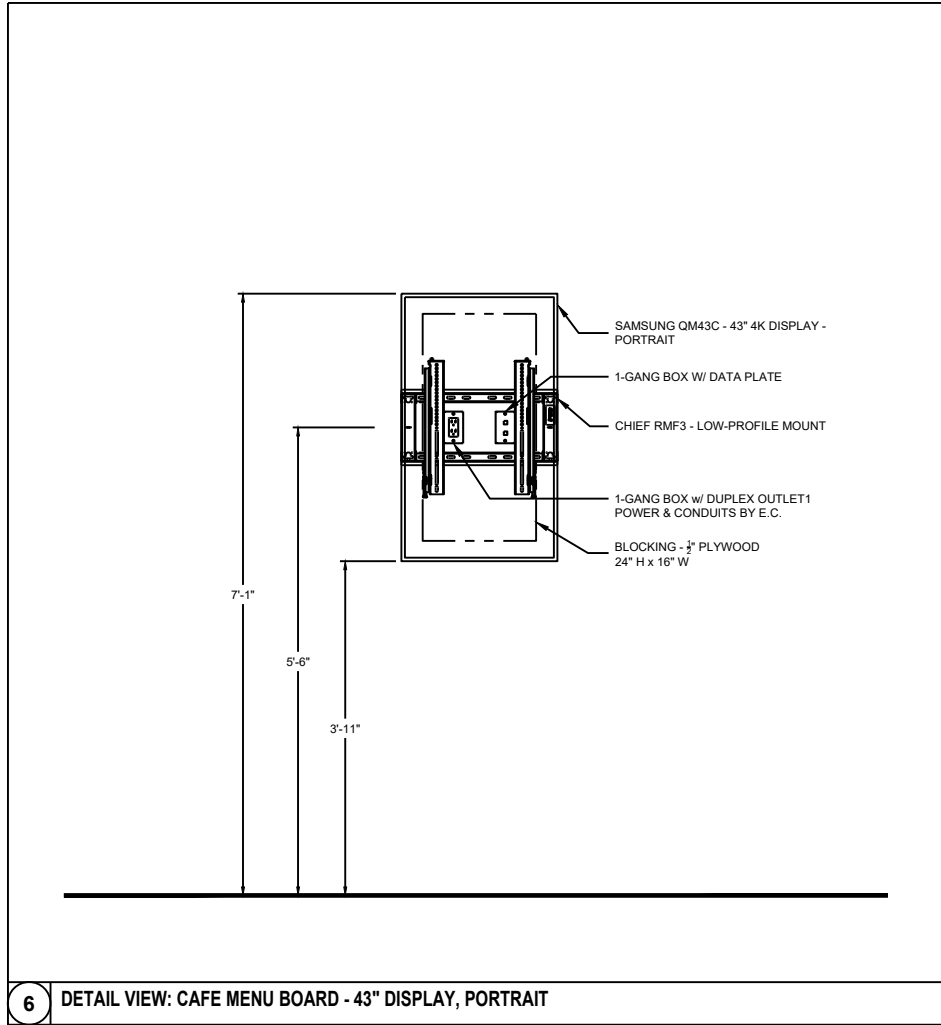


6 DETAIL VIEW: CAFE MENU BOARD - 43" DISPLAY, PORTRAIT

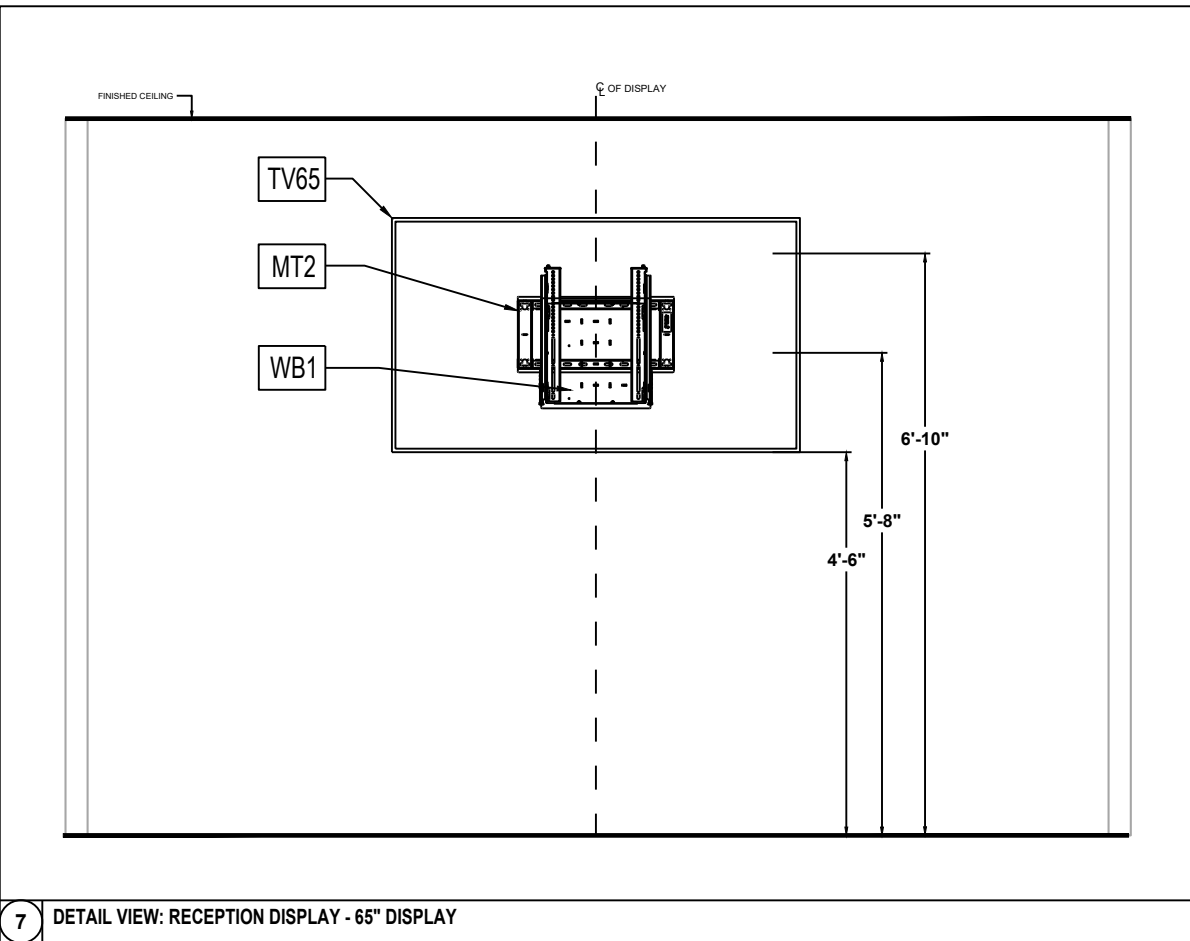

7 DETAIL VIEW: RECEPTION DISPLAY - 65" DISPLAY

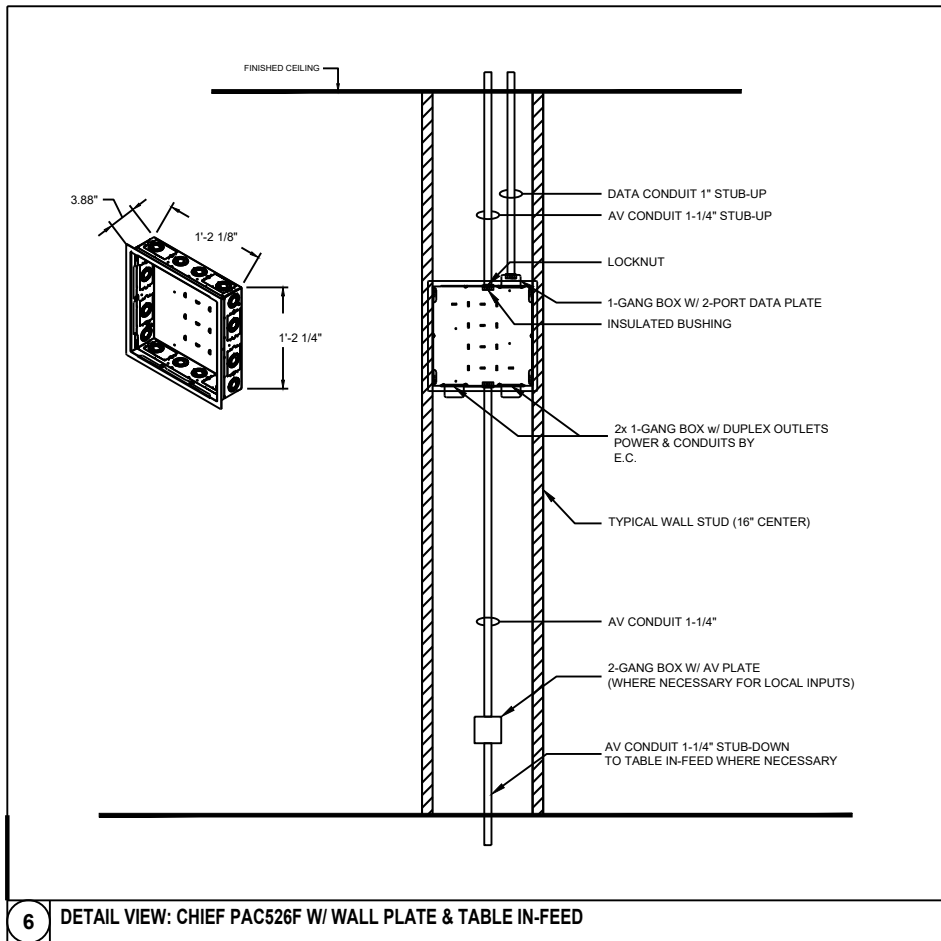

8 DETAIL VIEW: CHIEF PACS20F W/ WALL PLATE & TABLE IN-FEED

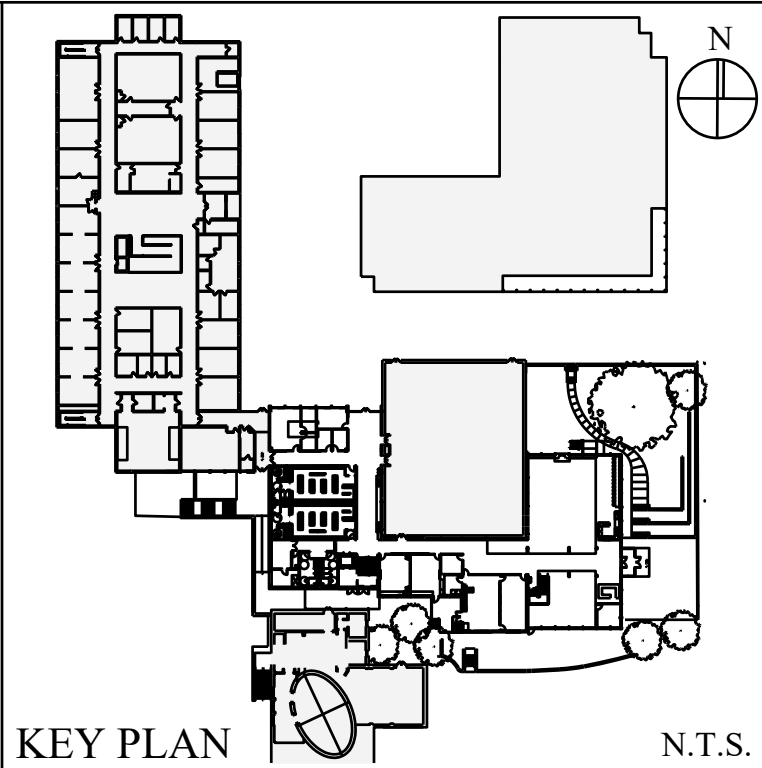

KEY PLAN N.T.S.

02/16/2026	ISSUE FOR CONSTRUCTION - BULLETIN 01
01/19/2026	ISSUE FOR CONSTRUCTION - REVISED SCOPE
01/19/2026	ISSUE FOR CONSTRUCTION

No.	Date	Revision
ARCHITECT	PETER GISOLFI ASSOCIATES, LLP	STRUCTURAL ENGINEER
566 W ARBURTON AVENUE	566 W ARBURTON AVENUE	DRIFILLA CONSULTING ENGINEERS
HASTINGS-ON-HUDSON, NY 10706	HASTINGS-ON-HUDSON, NY 10706	143 MAIN STREET
T: (914) 478-3677	T: (914) 478-3677	NY ACK, NY 10960
MEP ENGINEERS	MEP ENGINEERS	T: (845) 727-7793
NIETEN VENEGAL, PLLC	NIETEN VENEGAL, PLLC	ROOFING CONSULTANT
48 PURCHASE STREET	48 PURCHASE STREET	WATSKY ASSOCIATES
EYE, NY 10586	EYE, NY 10586	20 MADISON AVENUE
T: (914) 962-5509	T: (914) 962-5509	VALHALLA, NY 10595
CODE CONSULTANT	CODE CONSULTANT	T: (914) 948-3458
MILROSE CONSULTING	MILROSE CONSULTING	SPECIFICATIONS
500 SUMNER STREET, STE 501	500 SUMNER STREET, STE 501	CONSTRUCTION SPECIFICATIONS INC.
STAMFORD, CT 06901	STAMFORD, CT 06901	PO BOX 480
T: (203) 564-9991	T: (203) 564-9991	MORGANVILLE, NJ 07751
AV-IT-SEC CONSULTANT	AV-IT-SEC CONSULTANT	T: (732) 970-0706
ROE INDIENT TECHNOLOGIES CORP.	ROE INDIENT TECHNOLOGIES CORP.	
116 WEST 32ND STREET	116 WEST 32ND STREET	
NEW YORK, NY 10001	NEW YORK, NY 10001	
(212) 643-9055	(212) 643-9055	
GEOTECHNICAL ENGINEER (BY OWNER)	GEOTECHNICAL ENGINEER (BY OWNER)	CIVIL ENGINEER (BY OWNER)
LANGJAN CT, INC.	LANGJAN CT, INC.	RIEDNESS AND MEAD
255 LONG WHARF DRIVE	255 LONG WHARF DRIVE	22 FIRST STREET
NEW HAVEN, CT 06905	NEW HAVEN, CT 06905	STAMFORD, CT 06905
(203) 562-9771	(203) 562-9771	(203) 327-0500


Stamp

Project Title
KING SCHOOL
UPPER SCHOOL
CRI/COMMONS
ADDITION PROJECT
1450 Newfield Avenue
Stamford, CT 06905


Drawing Title
AUDIOVISUAL
ELEVATION DETAILS
Scale Job No. Date Drawing No.
1/8"=1'-0" 12219.00 12-18-25
Drawn Checked Approved
-- -- --
TA-301.00
- OF -

Peter Gisolfi Associates
Architects • Landscape Architects, LLP
566 Warburton Avenue
Hastings on Hudson, NY 10706
(914) 478-3677
PETER GISOLFI ASSOCIATES LLP



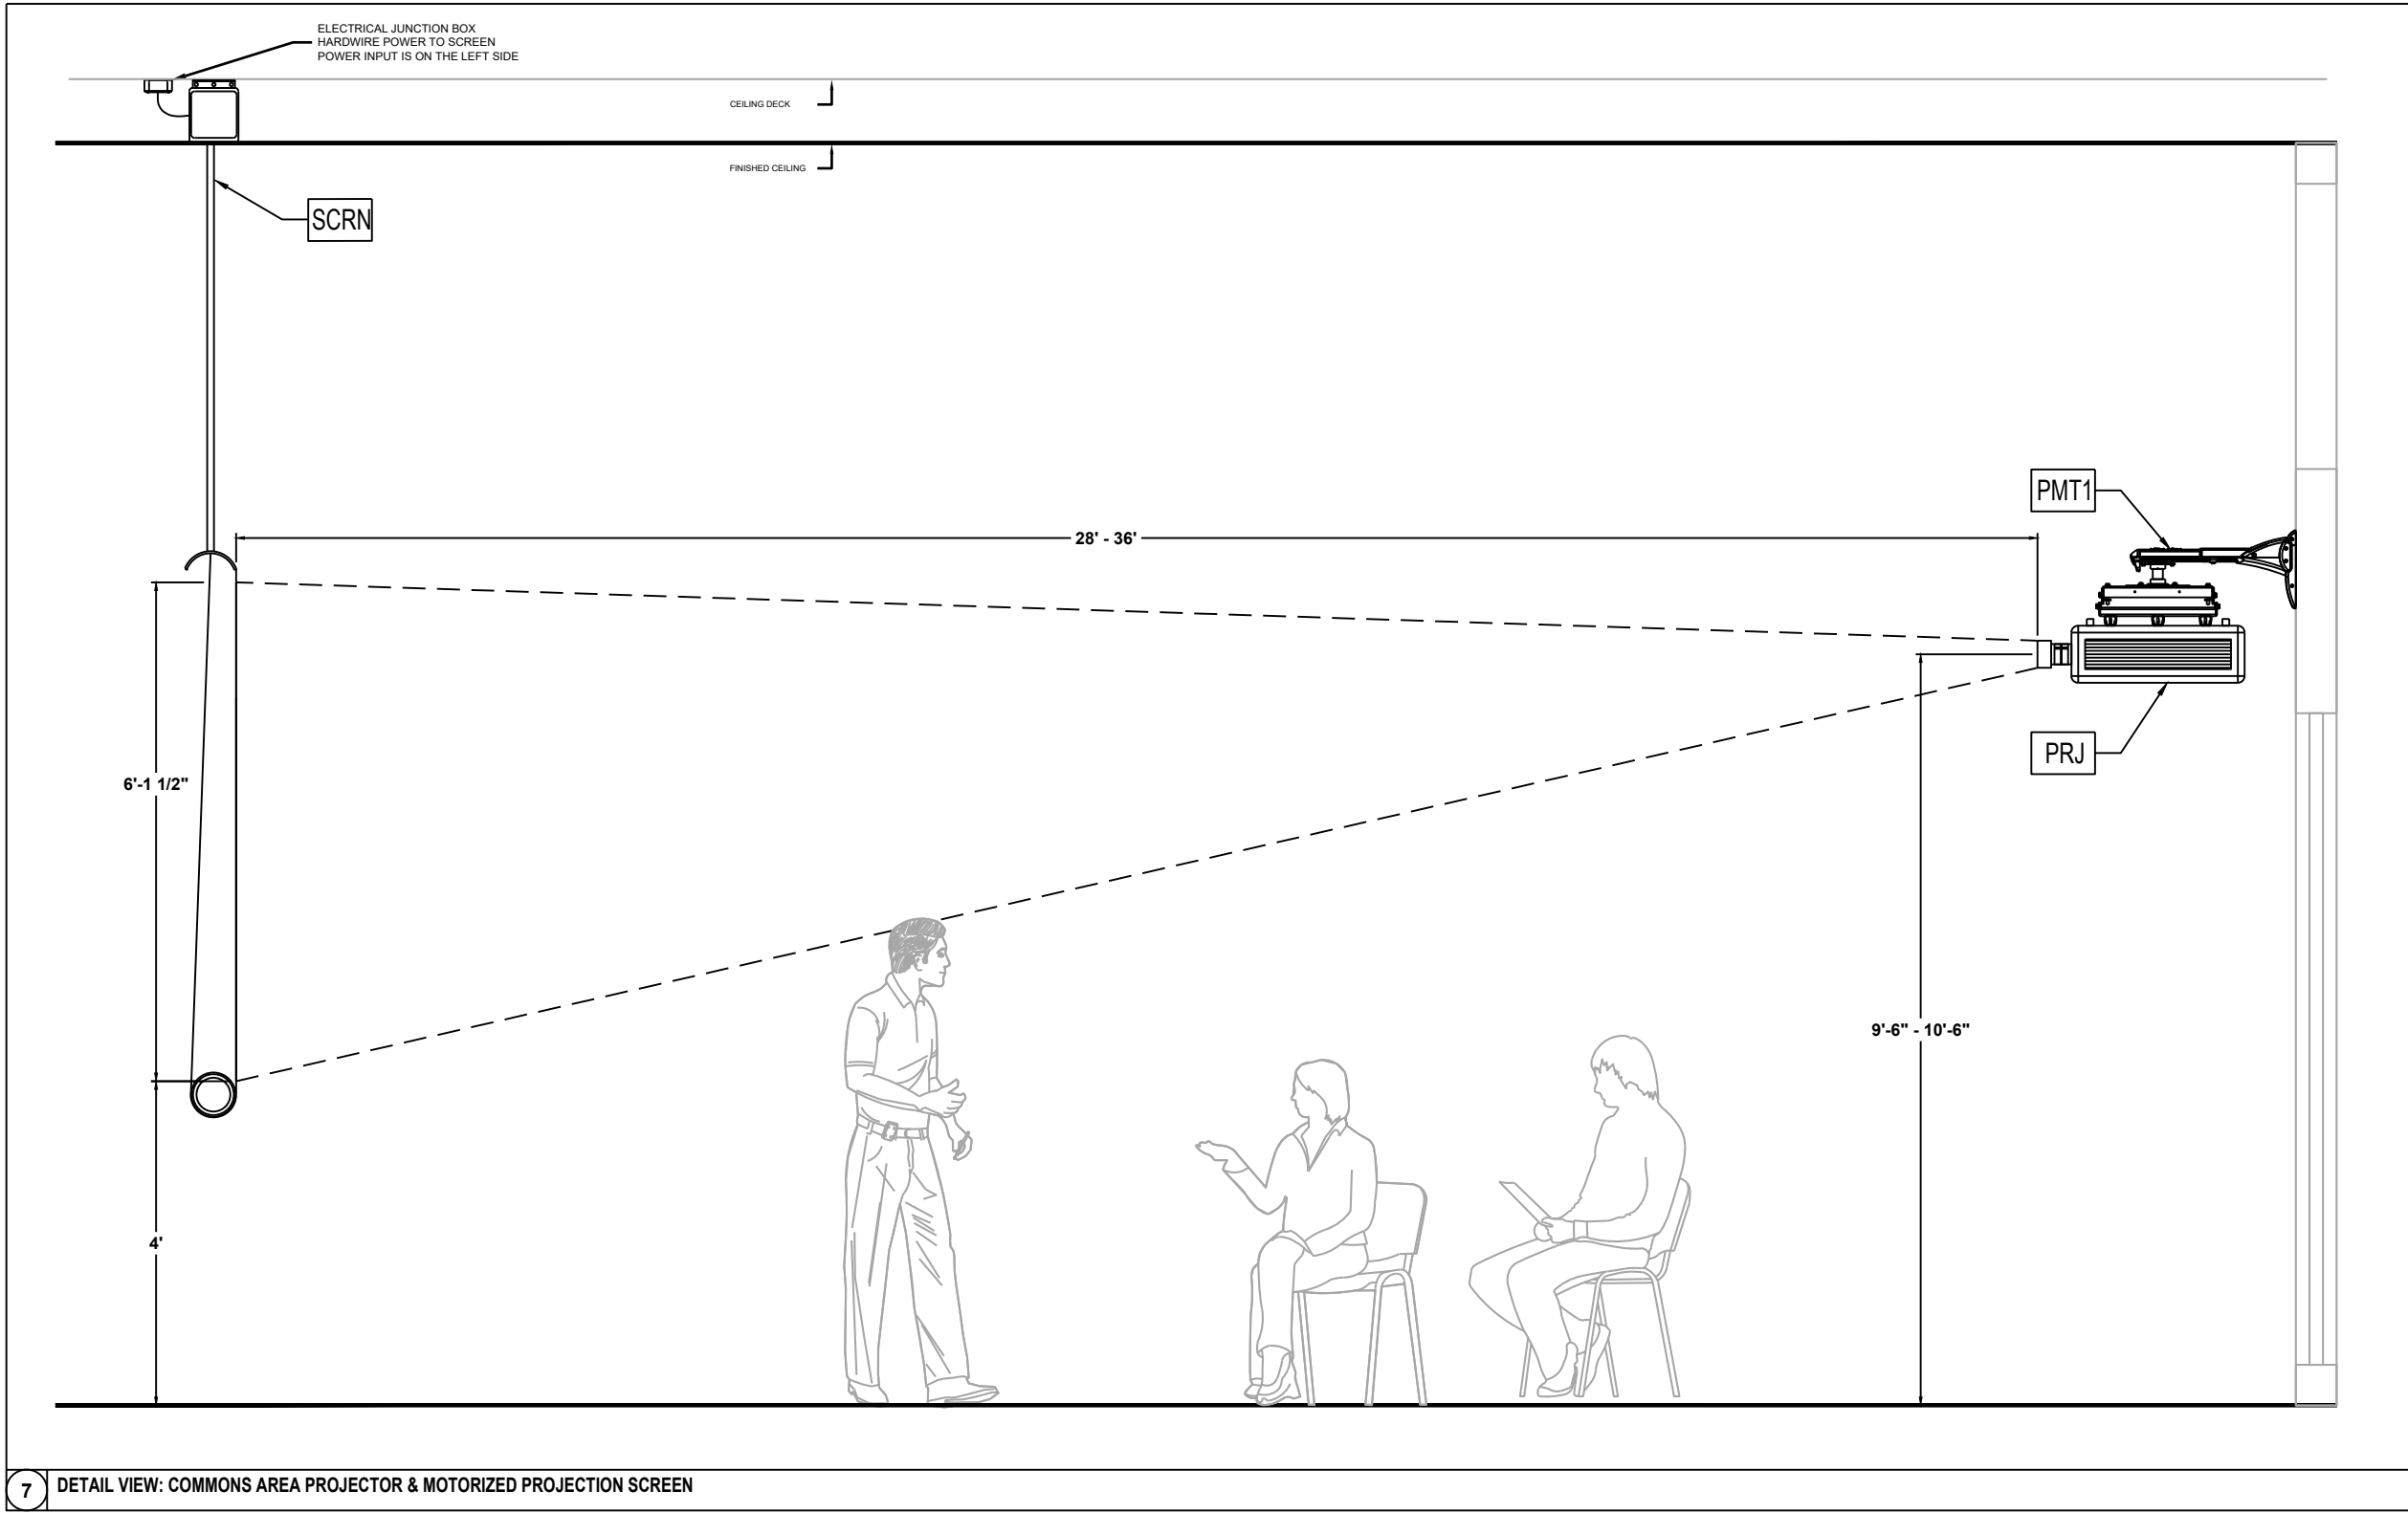

7 DETAIL VIEW: COMMONS AREA PROJECTOR & MOTORIZED PROJECTION SCREEN

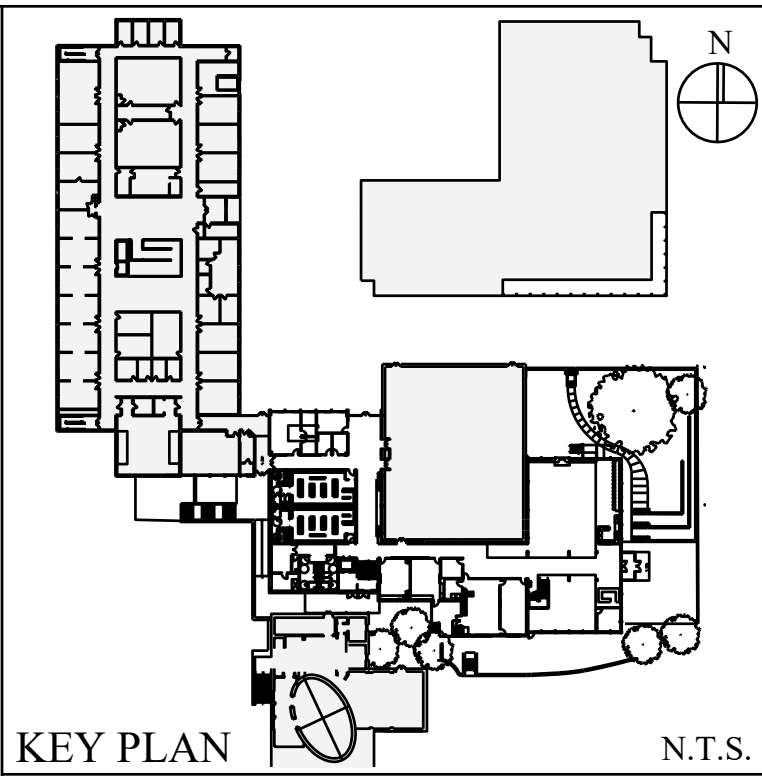

KEY PLAN N.T.S.

02/16/2026	ISSUE FOR CONSTRUCTION - BULLETIN 01
01/19/2026	ISSUE FOR CONSTRUCTION - REVISED SCOPE
01/19/2026	ISSUE FOR CONSTRUCTION

No.	Date	Revision
ARCHITECT		
PETER GISOLFI ASSOCIATES, LLP		
566 WARBURTON AVENUE		
HASTINGS-ON-HUDSON, NY 10706		
T: (914) 478-3677		
MEP ENGINEERS		
NIETEN YENIGAL, PLLC		
48 PURCHASE STREET		
RYE, NY 10580		
T: (914) 967-8509		
CODE CONSULTANT		
MILROSE CONSULTING		
580 SUMNER STREET, STE 501		
STAMFORD, CT 06901		
T: (203) 564-9991		
AV-IT-SEC CONSULTANT		
ROE INFINITY TECHNOLOGIES CORP.		
116 WEST 32ND STREET		
NEW YORK, NY 10001		
(212) 643-9055		
GEOTECHNICAL ENGINEER (BY OWNER)		
LANGAN CT, INC.		
255 LONG WHARF DRIVE		
NEW HAVEN, CT 06955		
(203) 562-9771		
STRUCTURAL ENGINEER		
DRIFILLA CONSULTING ENGINEERS		
143 MAIN STREET		
NY ACK, NY 10960		
T: (845) 727-7793		
ROOFING CONSULTANT		
WATSKY ASSOCIATES		
20 MADISON AVENUE		
VALHALLA, NY 10595		
T: (914) 948-3450		
SPECIFICATIONS		
CONSTRUCTION SPECIFICATIONS INC.		
PO BOX 400		
MORGANVILLE, NJ 07751		
T: (732) 970-0706		
CIVIL ENGINEER (BY OWNER)		
RIDNESS AND MEAD		
22 FIRST STREET		
STAMFORD, CT 06905		
(203) 327-0500		




Stamp

Project Title
KING SCHOOL
UPPER SCHOOL
CRI/Commons
ADDITION PROJECT
1450 Newfield Avenue
Stamford, CT 06905

Drawing Title			
AUDIOVISUAL ELEVATION DETAILS			
Scale	Job No.	Date	Drawing No.
	12219.00	12-18-25	TA-302.00
Drawn	Checked	Approved	
--	--	--	
- OF -			

Peter Gisolfi Associates
Architects • Landscape Architects, LLP
566 Warburton Avenue
Hastings on Hudson, NY 10706
(914) 478-3677
PETER GISOLFI ASSOCIATES LLP





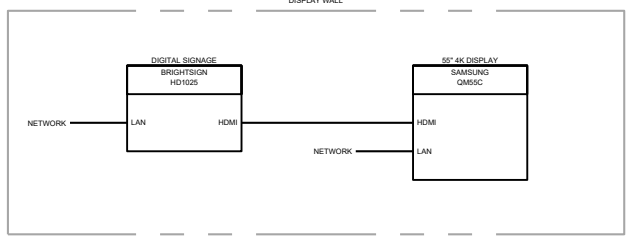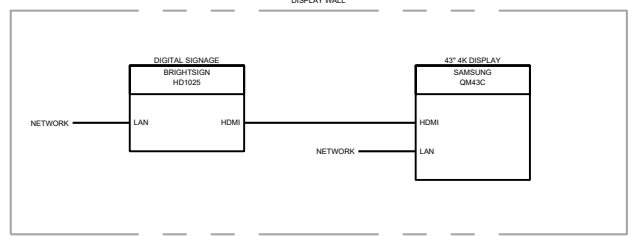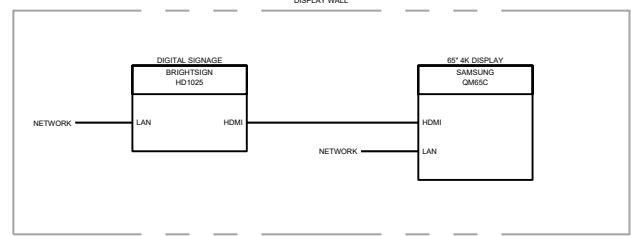

RECEPTION AREA




LAKE MOUNTAIN HOUSE

LAKE MOUNTAIN HOUSE

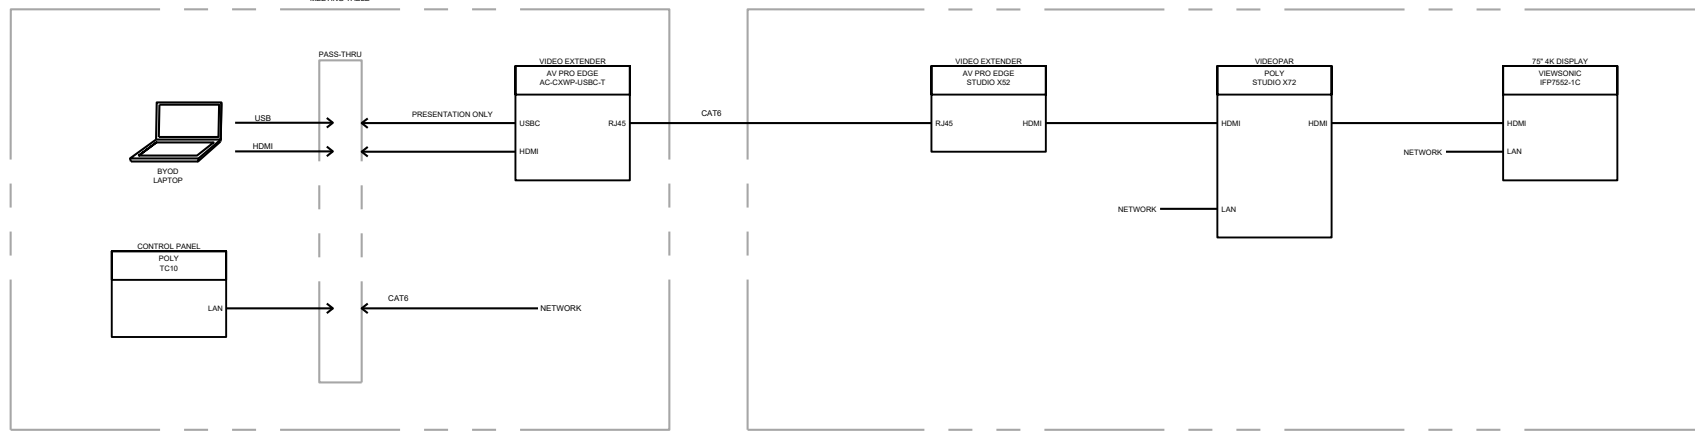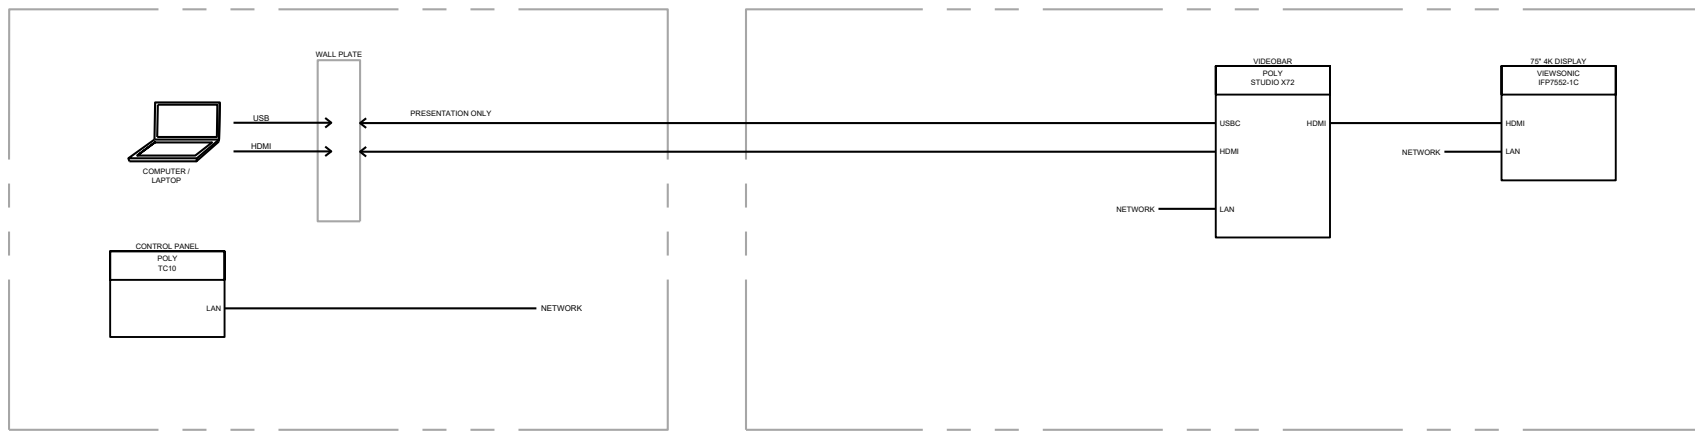





LAKE MOUNTAIN HOUSE

LAKE MOUNTAIN HOUSE

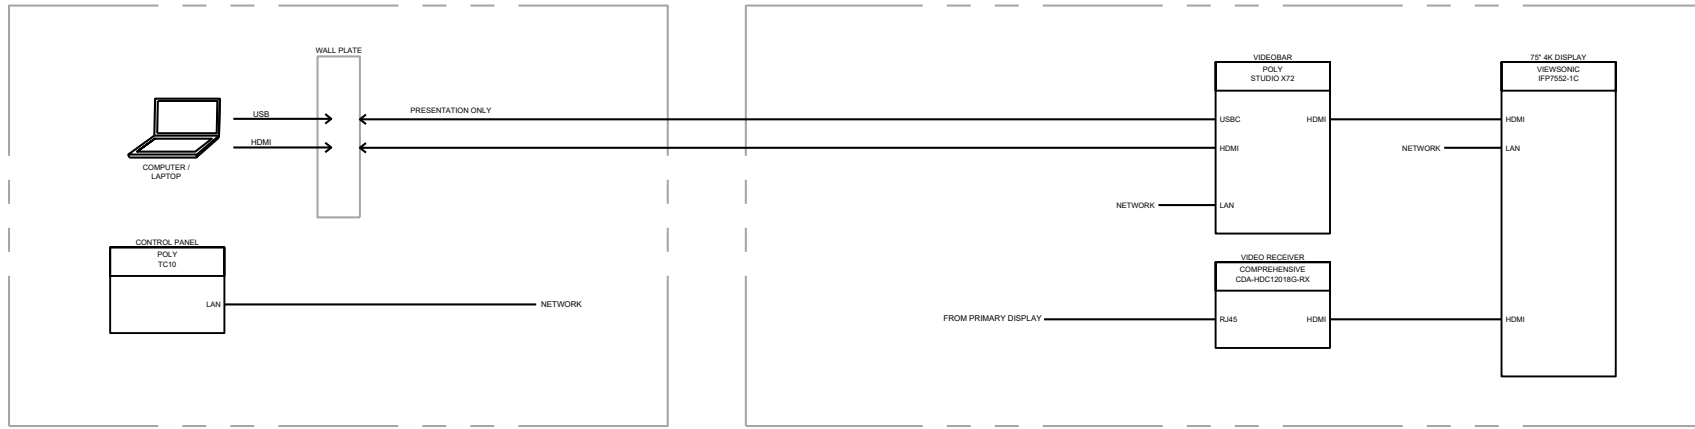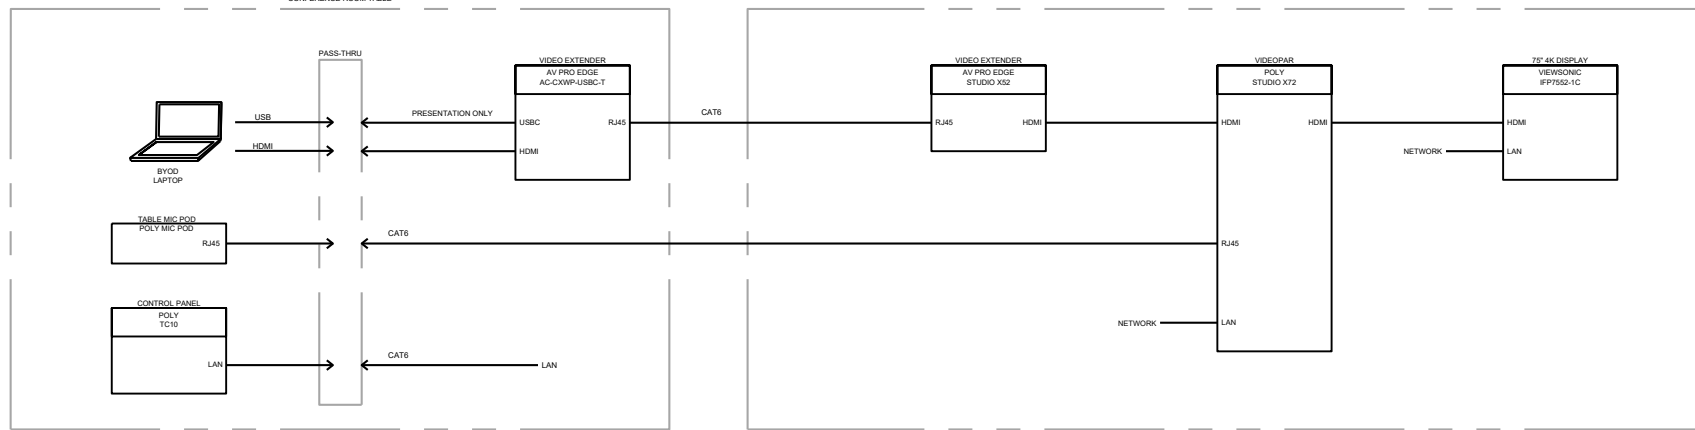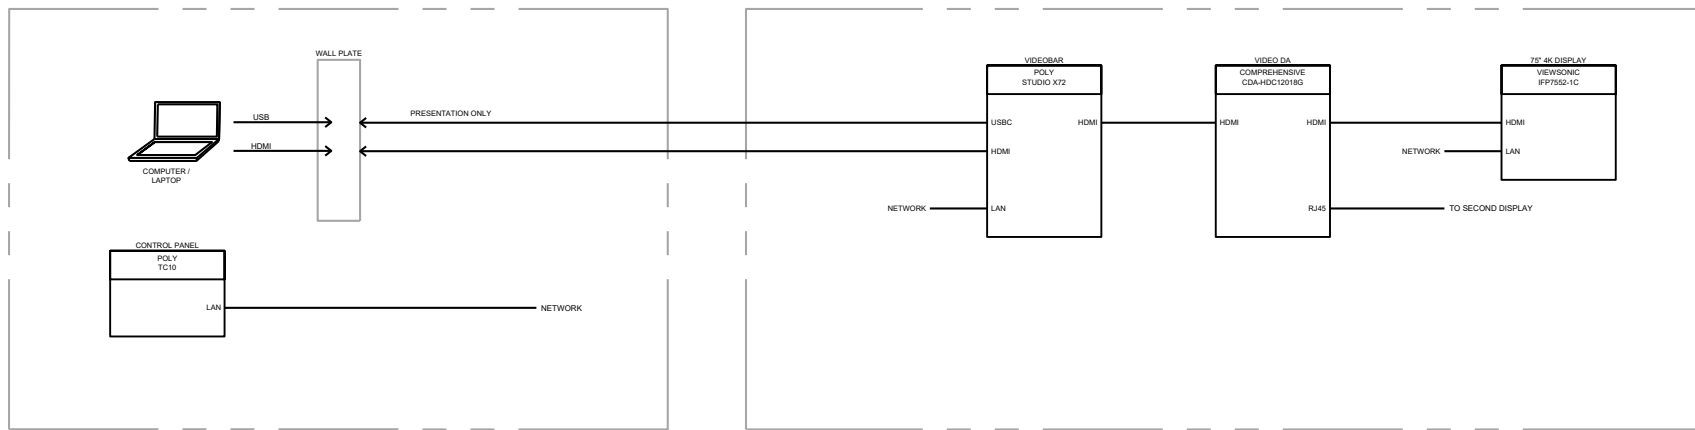


CONFERENCE ROOM

LAKE MOUNTAIN HOUSE

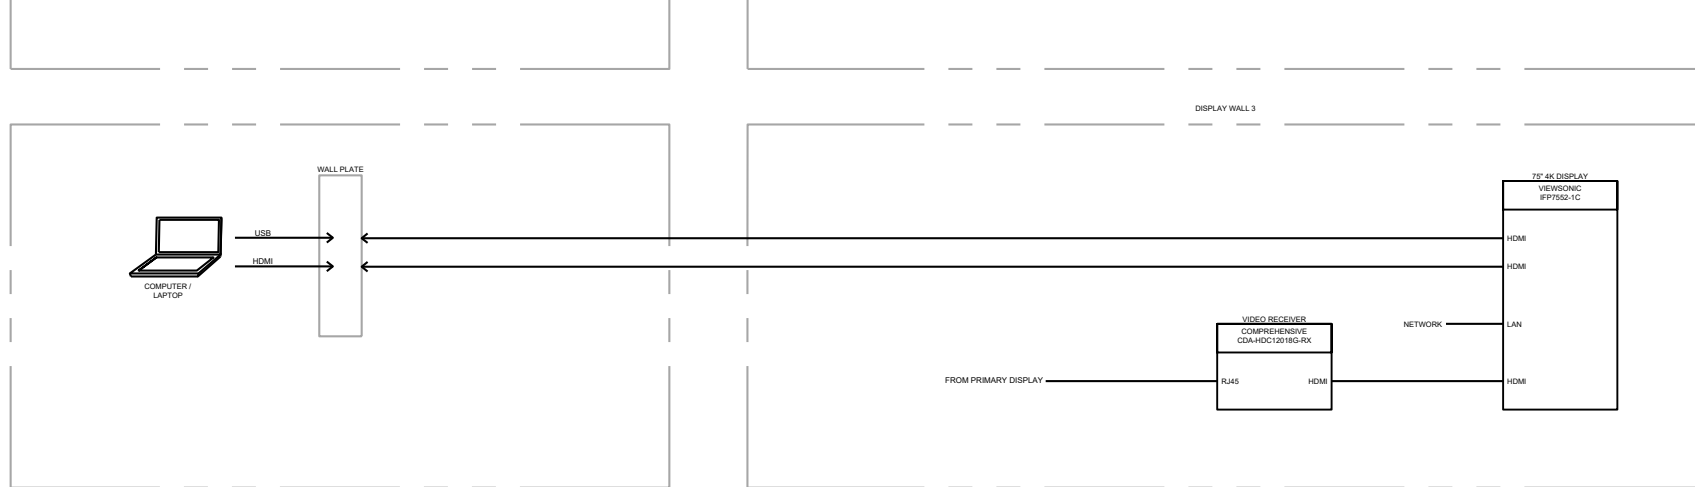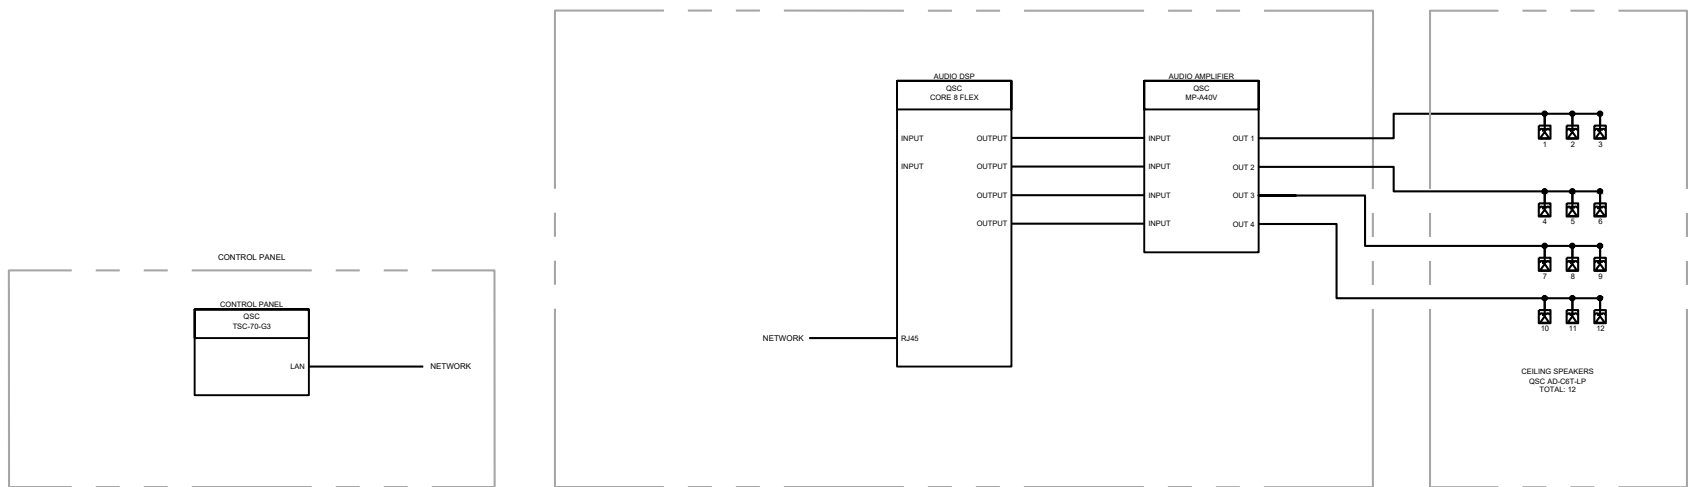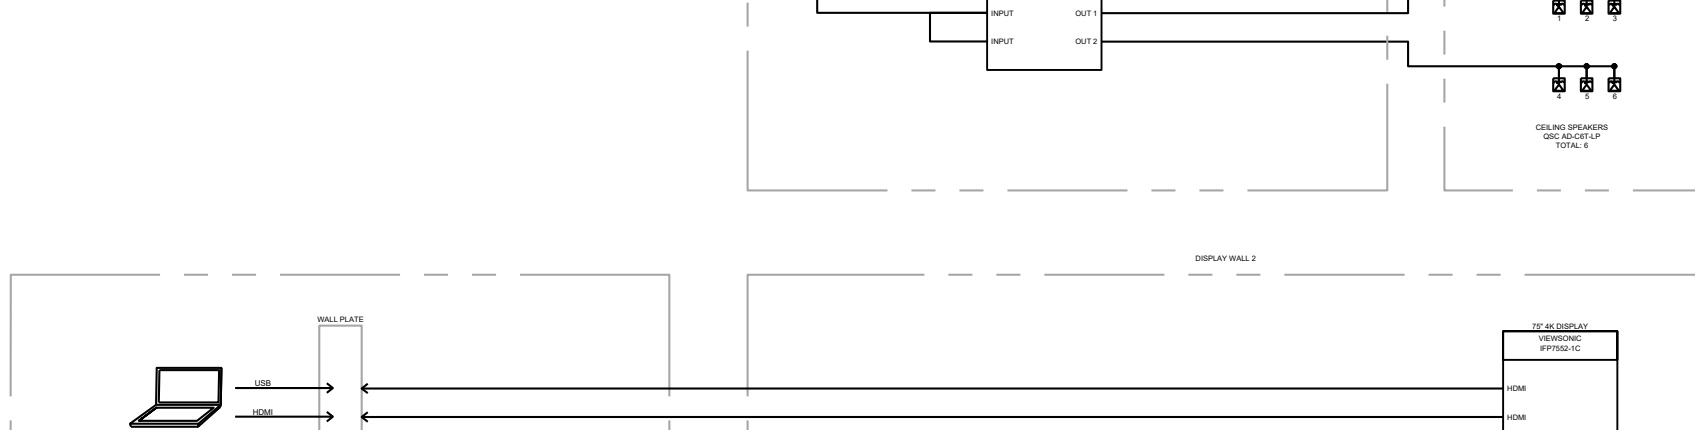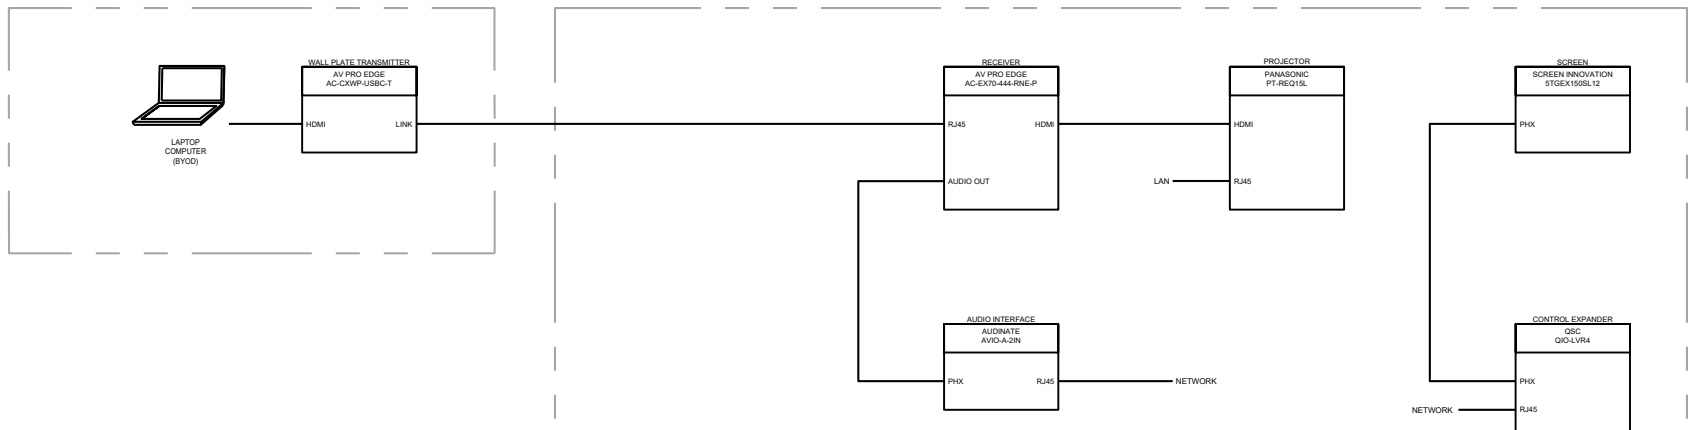

COMMONS AREA

FITNESS ROOM

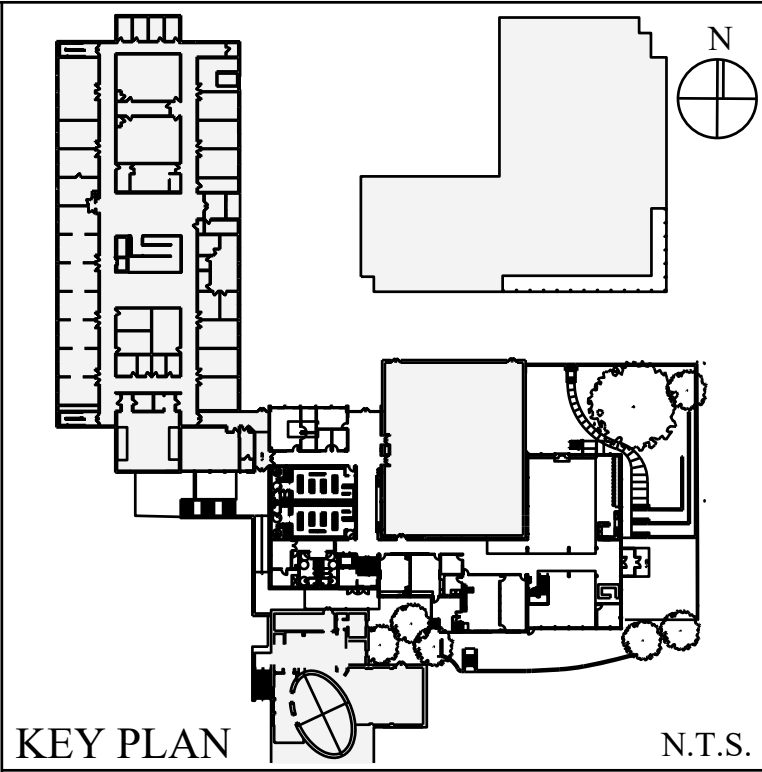

KEY PLAN

02/16/2026 ISSUE FOR CONSTRUCTION - BULLETIN 01

01/19/2026 ISSUE FOR CONSTRUCTION - REVISED SCOPE

01/19/2026 ISSUE FOR CONSTRUCTION

No. Date Revision

ARCHITECT

PETER GISOLFI ASSOCIATES, LLP

566 WARBURTON AVENUE

HASTINGS-ON-HUDSON, NY 10706

T: (914) 478-3677

MEP ENGINEERS

WATSKY ASSOCIATES, PLLC

48 PURCHASE STREET

EYE, NY 10580

T: (914) 967-8609

CODE CONSULTANT

MILROSE CONSULTING

500 SUMNER STREET, STE 501

STAMFORD, CT 06901

T: (203) 564-9991

AV/IT-SEC CONSULTANT

ROE UNIFIED TECHNOLOGIES CORP.

116 WEST 32ND STREET

NEW YORK, NY 10001

(212) 643-9055

GEOTECHNICAL ENGINEER (BY OWNER)

LANGAN CT, INC.

555 LONG WHARF DRIVE

NEW HAVEN, CT 06955

(203) 562-9771

CIVIL ENGINEER (BY OWNER)

RIDGESS AND MEAD

22 FIRST STREET

STAMFORD, CT 06905

(203) 327-0500

Stamp

Project Title

KING SCHOOL

UPPER SCHOOL

CRI/COMMONS

ADDITION PROJECT

1450 Newfield Avenue

Stamford, CT 06905

Drawing Title

AUDIOVISUAL

SIGNAL FLOWS

Scale Job No. Date Drawing No.

12219.00 12-18-25

Drawn Checked Approved

TA-601.00

-- -- -- - OF -

Peter Gisolfi Associates Architects + Landscape Architects, LLP

566 Warburton Avenue

Hastings on Hudson, NY 10706

(914) 478-3677

PETER GISOLFI ASSOCIATES LLP

United Technologies Corp

116 West 32nd Street, 12th Floor | New York, N.Y. 10001

P 212.643.9055 | info@mgeupc.net | www.mgeupc.com

King School
1450 Newfield Ave, Stamford, CT

Issue For 100% CD
Version 1.0

Room / Location	Qty.	Room Cost	Total Cost
CRI Gallery	1	\$ -	\$ -
Student Commons Area	1	\$ -	\$ -
Innovation Lab	1	\$ -	\$ -
Aspire Classroom	1	\$ -	\$ -
Athletics Office	1	\$ -	\$ -
Athletics Trainers Area	1	\$ -	\$ -
Headmaster's Office	1	\$ -	\$ -
Conference Room	1	\$ -	\$ -
Collab Room	2	\$ -	\$ -
Classroom	2	\$ -	\$ -
Fitness Room	1	\$ -	\$ -
Digital Signage	7	\$ -	\$ -
Reception Area	1	\$ -	\$ -
Total Project Cost		\$ -	

CRI Gallery

Equipment	Manufacturer	Model No.	Qty.	Unit	Total
Display System Equipment					
75" 4K UHD Flat Panel Display, Commercial Rated	Samsung	QM75C	1	\$ -	\$ -
Display Floor Mount Bracket, Bolt-Down	Chief	PFB1UB	1	\$ -	\$ -
Sub Total					\$ -
Video System Equipment					
4K Digital Signage Player w/ 32Gb SD Memory Card	Brightsign	HD1025	1	\$ -	\$ -
Sub Total					\$ -
Audio System Equipment					
Sub Total					\$ -
Control System Equipment					
Sub Total					\$ -
Equipment Rack & Hardware					
Sub Total					\$ -
Miscellaneous Equipment					
Miscellaneous Bulk Cable, Connectors, Accessories & Hardware	AVC	LOT	1	\$ -	\$ -
Sub Total					\$ -
Non Equipment Costs					
Project Management					\$ -
Engineering / Commissioning					\$ -
Pre-installation / Fabrication					\$ -
Installation / Supervision					\$ -
Sub-Contract Installer					\$ -
Programming					\$ -
G&A / Freight / Delivery					\$ -
Local Sales Tax (As required per jurisdiction)					\$ -
Sub Total					\$ -
BASE ROOM TOTAL					\$ -

Student Commons Area

Equipment	Manufacturer	Model No.	Qty.	Unit	Total
Display System Equipment					
15K Lumens 4K Video Projector, 1-Chip DLP, Laser Diode	Panasonic	PT-RE015L	1	\$ -	\$ -
Long Throw Zoom Lens, 2.07 - 3.38 1 Ratio	Panasonic	ET-CT1700	1	\$ -	\$ -
15P Digital Motorized Projection Screen, Slate 1.2, Ceiling Recessed	Screen Innovations	STGEX160SL12	1	\$ -	\$ -
Heavy Duty Wall Mount Bracket	Chief	WMA2S	1	\$ -	\$ -
Large Projector Mounting Bracket	Chief	VCMU	1	\$ -	\$ -
Sub Total					\$ -
Video System Equipment					
USB-CHDMI 4K Video Wall Plate Transmitter	AV Pro Edge	AC-CRWP-USB-C-T	1	\$ -	\$ -
USB-CHDMI 4K Video Extender Receiver	AV Pro Edge	AC-EX70-444-RNE-P	1	\$ -	\$ -
Sub Total					\$ -
Audio System Equipment					
6.5" 2-Way In-Ceiling Speaker, 70W, Color TBD	QSC	AD-CRT-LP	12	\$ -	\$ -
Compact Audio Matrix Processor	QSC	Core 8-Flex	1	\$ -	\$ -
4-Channel Audio Amplifier, 70W	QSC	MP-A40V	1	\$ -	\$ -
2-Channel w/ Dante Audio Interface Module	Audinate	AVID-A-2IN	1	\$ -	\$ -
Sub Total					\$ -
Control System Equipment					
7" Touch Panel, Wall Mount	QSC	TSC-70-G3	1	\$ -	\$ -
Sub Total					\$ -
Equipment Rack & Hardware					
Sub Total					\$ -
Miscellaneous Equipment					
Miscellaneous Bulk Cable, Connectors, Accessories & Hardware	AVC	LOT	1	\$ -	\$ -
Sub Total					\$ -
Non Equipment Costs					
Project Management					\$ -
Engineering / Commissioning					\$ -
Pre-installation / Fabrication					\$ -
Installation / Supervision					\$ -
Sub-Contract Installer					\$ -
Programming					\$ -
G&A / Freight / Delivery					\$ -
Local Sales Tax (As required per jurisdiction)					\$ -
Sub Total					\$ -
BASE ROOM TOTAL					\$ -

Innovation Lab

Equipment	Manufacturer	Model No.	Qty.	Unit	Total
Display System Equipment					
75" 4K UHD Interactive Display, Commercial Rated	Viewsonic	IP P7552-1C	2	\$ -	\$ -
In-Wall Display Backbox	Chief	PAC520F	2	\$ -	\$ -
Articulating Wall Mount Bracket	Chief	AS3LD	2	\$ -	\$ -
Sub Total					\$ -
Video System Equipment					
All-In-One Video Conference Soundbar	Poly	Studio X22	2	\$ -	\$ -
Service & Support License - 1 Year	Poly	SSP License	2	\$ -	\$ -
Custom Wall Plate w/ HDMI & USB-C (BP All Support)	AVC	Wall Plate	2	\$ -	\$ -
1/2 HDMI Distributor Amplifier w/ HDBT Receivers	Comprehensive	CDA-HDC12018G	2	\$ -	\$ -
Sub Total					\$ -
Audio System Equipment					
Sub Total					\$ -
Control System Equipment					
10" Control Panel	Poly	TC10	2	\$ -	\$ -
Compact Control Processor	Credentia	RMC4	1	\$ -	\$ -
Sub Total					\$ -
Equipment Rack & Hardware					
Sub Total					\$ -
Miscellaneous Equipment					
Miscellaneous Bulk Cable, Connectors, Accessories & Hardware	AVC	LOT	1	\$ -	\$ -
Sub Total					\$ -
Non Equipment Costs					
Project Management					\$ -
Engineering / Commissioning					\$ -
Pre-installation / Fabrication					\$ -
Installation / Supervision					\$ -
Sub-Contract Installer					\$ -
Programming					\$ -
G&A / Freight / Delivery					\$ -
Local Sales Tax (As required per jurisdiction)					\$ -
Sub Total					\$ -
BASE ROOM TOTAL					\$ -

Aspire Classroom

Note: room solution is under development at time of issuance.

Equipment	Manufacturer	Model No.	Qty.	Unit	Total
Display System Equipment					
75" 4K UHD Interactive Display, Commercial Rated	Viewsonic	IP P7552-1C	1	\$ -	\$ -
138" All-In-One LED Display w/ Mobile Cart System	Viewsonic	LD6138-151	1	\$ -	\$ -
In-Wall Display Backbox	Chief	PAC520F	2	\$ -	\$ -
Articulating Wall Mount Bracket	Chief	AS3LD	1	\$ -	\$ -
Sub Total					\$ -
Video System Equipment					
All-In-One Video Conference Soundbar	Poly	Studio X22	1	\$ -	\$ -
Dual Camera with 20-Megapixel 4K Sensors	Poly	Studio E70	1	\$ -	\$ -
Video Conference Codec	Poly	G62	1	\$ -	\$ -
Service & Support License - 1 Year	Poly	SSP License	2	\$ -	\$ -
DocuCAM 4K Document Camera	Video	999-99980-000	4	\$ -	\$ -
8-in-36-SD Low Production Switcher	Blackmagic	SWATEMAMALPCEXT8G	1	\$ -	\$ -
Custom Wall Plate w/ HDMI & USB-C (BP All Support)	AVC	Wall Plate	2	\$ -	\$ -
1/2 HDMI Distributor Amplifier w/ HDBT Receivers	Comprehensive	CDA-HDC12018G	1	\$ -	\$ -
Sub Total					\$ -
Audio System Equipment					
6.5" 2-Way In-Ceiling Speaker, 70W, Color TBD	QSC	AD-CRT-LP	8	\$ -	\$ -
Audio Matrix DSP Processor	QSC	Core 24F	1	\$ -	\$ -
4-Channel Audio Amplifier, 70W	QSC	MP-A40V	1	\$ -	\$ -
Ceiling Microphone Array, Dante Audio Interface	Audio-Technica	ATND1061	2	\$ -	\$ -
Sub Total					\$ -
Control System Equipment					
10" Control Panel	Poly	TC10	2	\$ -	\$ -
8-Port, 1GB Network Switch, Managed w/ POE+	QSC	NS10-125+	1	\$ -	\$ -
Sub Total					\$ -
Equipment Rack & Hardware					
12RU Rackmount Frame Equipment Rack	Middle Atlantic	QFR-12-18	1	\$ -	\$ -
5-Outlet Rack Mount PDU, 15A	Middle Atlantic	PDX-915R-SP	1	\$ -	\$ -
Rack Shelves & Cable Management	Middle Atlantic	LOT	1	\$ -	\$ -
Sub Total					\$ -
Miscellaneous Equipment					
Miscellaneous Bulk Cable, Connectors, Accessories & Hardware	AVC	LOT	1	\$ -	\$ -
Sub Total					\$ -
Non Equipment Costs					
Project Management					\$ -
Engineering / Commissioning					\$ -
Pre-installation / Fabrication					\$ -
Installation / Supervision					\$ -
Sub-Contract Installer					\$ -
Programming					\$ -
G&A / Freight / Delivery					\$ -
Local Sales Tax (As required per jurisdiction)					\$ -
Sub Total					\$ -
BASE ROOM TOTAL					\$ -

Athletics Office


Equipment	Manufacturer	Model No.	Qty.	Unit	Total
Display System Equipment					
55" 4K UHD Flat Panel Display, Commercial Rated	Samsung	QM55C	1	\$ -	\$ -
In-Wall Display Backbox	Chief	PAC520F	1	\$ -	\$ -
Articulating Wall Mount Bracket	Chief	AS3LD	1	\$ -	\$ -
Sub Total					\$ -
Video System Equipment					
All-In-One Video Conference Soundbar	Poly	Studio X22	1	\$ -	\$ -
Service & Support License - 1 Year	Poly	SSP License	1	\$ -	\$ -
USB-CHDMI 4K Video Wall Plate Transmitter	AV Pro Edge	AC-CRWP-USB-C-T	1	\$ -	\$ -
USB-CHDMI 4K Video Extender Receiver	AV Pro Edge	AC-EX70-444-RNE-P	1	\$ -	\$ -
Sub Total					\$ -
Audio System Equipment					
Sub Total					\$ -
Control System Equipment					
10" Control Panel	Poly	TC10	1	\$ -	\$ -
Sub Total					\$ -
Equipment Rack & Hardware					
Sub Total					\$ -
Miscellaneous Equipment					
Miscellaneous Bulk Cable, Connectors, Accessories & Hardware	AVC	LOT	1	\$ -	\$ -
Sub Total					\$ -
Non Equipment Costs					
Project Management					\$ -
Engineering / Commissioning					\$ -
Pre-installation / Fabrication					\$ -
Installation / Supervision					\$ -
Sub-Contract Installer					\$ -
Programming					\$ -
G&A / Freight / Delivery					\$ -
Local Sales Tax (As required per jurisdiction)					\$ -
Sub Total					\$ -
BASE ROOM TOTAL					\$ -

Athletics Trainers Area

Equipment	Manufacturer	Model No.	Qty.	Unit	Total
Display System Equipment					
75" 4K UHD Interactive Display, Commercial Rated	Viewsonic	IP P7552-1C	1	\$ -	\$ -
In-Wall Display Backbox	Chief	PAC520F	1	\$ -	\$ -
Articulating Wall Mount Bracket	Chief	AS3LD	1	\$ -	\$ -
Sub Total					\$ -
Video System Equipment					
Custom Wall Plate w/ HDMI & USB-C (BP All Support)	AVC	Wall Plate	1	\$ -	\$ -
Sub Total					\$ -
Audio System Equipment					
Sub Total					\$ -
Control System Equipment					
Sub Total					\$ -
Equipment Rack & Hardware					
Sub Total					\$ -
Miscellaneous Equipment					
Miscellaneous Bulk Cable, Connectors, Accessories & Hardware	AVC	LOT	1	\$ -	\$ -
Sub Total					\$ -
Non Equipment Costs					
Project Management					\$ -
Engineering / Commissioning					\$ -
Pre-installation / Fabrication					\$ -
Installation / Supervision					\$ -
Sub-Contract Installer					\$ -
Programming					\$ -
G&A / Freight / Delivery					\$ -
Local Sales Tax (As required per jurisdiction)					\$ -
Sub Total					\$ -
BASE ROOM TOTAL					\$ -

Reception Area

Equipment	Manufacturer	Model No.	Qty.	Unit	Total
Display System Equipment					
43" 4K UHD Flat Panel Display, Commercial Rated	Samsung	QM43C	1	\$ -	\$ -
65" 4K UHD Flat Panel Display, Commercial Rated	Samsung	QM65C	1	\$ -	\$ -
In-Wall Display Backbox	Chief	PAC520F	1	\$ -	\$ -
Wall Mount Bracket, Portrait	Chief	RMF3	2	\$ -	\$ -
Sub Total					\$ -
Video System Equipment					
4K Digital Signage Player w/ 32Gb SD Memory Card	Brightsign	HD1025	2	\$ -	\$ -
Sub Total					\$ -
Audio System Equipment					
Sub Total					\$ -
Control System Equipment					
Sub Total					\$ -
Equipment Rack & Hardware					
Sub Total					\$ -
Miscellaneous Equipment					
Miscellaneous Bulk Cable, Connectors, Accessories & Hardware	AVC	LOT	1	\$ -	\$ -
Sub Total					\$ -
Non Equipment Costs					
Project Management					\$ -
Engineering / Commissioning					\$ -
Pre-installation / Fabrication					\$ -
Installation / Supervision					\$ -
Sub-Contract Installer					\$ -
Programming					\$ -
G&A / Freight / Delivery					\$ -
Local Sales Tax (As required per jurisdiction)					\$ -
Sub Total					\$ -
BASE ROOM TOTAL					\$ -

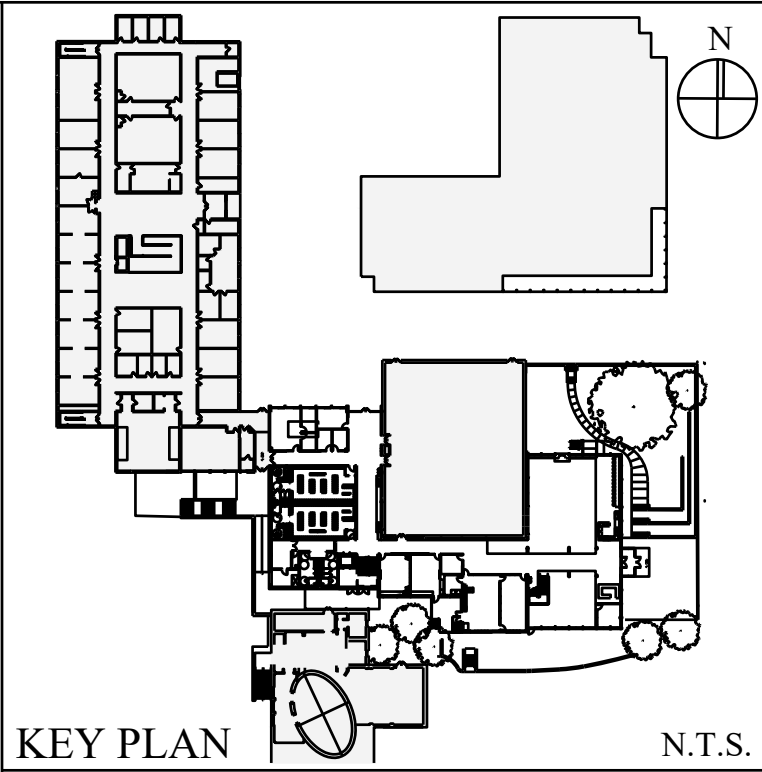

KEY PLAN

N.T.S.

02/16/2026 ISSUE FOR CON

Collab Room

Equipment	Manufacturer	Model No.	Qty.	Unit	Total
Display System Equipment					
75" 4K UHD Interactive Display, Commercial Rated	Viewsonic	IFP7552-1C	1	\$ -	\$ -
In-Wall Display Backbox	Chief	PAC526F	1	\$ -	\$ -
Articulating Wall Mount Bracket	Chief	AS3LD	1	\$ -	\$ -
Sub Total					\$ -
Video System Equipment					
All-In-One Video Conference Soundbar	Poly	Studio X72	1	\$ -	\$ -
Service & Support License - 1-year	Poly	SSP License	1	\$ -	\$ -
Custom Wall Plate w/ HDMI & USB-C (DP Alt Support)	AVC	Wall Plate	1	\$ -	\$ -
Sub Total					\$ -
Audio System Equipment					
Sub Total					\$ -
Control System Equipment					
10" Control Panel	Poly	TC10	1	\$ -	\$ -
Sub Total					\$ -
Equipment Rack & Hardware					
Sub Total					\$ -
Miscellaneous Equipment					
Miscellaneous Bulk Cable, Connectors, Accessories & Hardware	AVC	LOT	1	\$ -	\$ -
Sub Total					\$ -
Non Equipment Costs					
Project Management					\$ -
Engineering / Commissioning					\$ -
Pre-installation / Fabrication					\$ -
Installation / Supervision					\$ -
Sub-Contract Installer					\$ -
Programming					\$ -
G&A / Freight / Delivery					\$ -
Local Sales Tax (As required per jurisdiction)					\$ -
Sub Total					\$ -
BASE ROOM TOTAL					\$ -

Classroom

Equipment	Manufacturer	Model No.	Qty.	Unit	Total
Display System Equipment					
75" 4K UHD Interactive Display, Commercial Rated	Viewsonic	IFP7552-1C	1	\$ -	\$ -
In-Wall Display Backbox	Chief	PAC526F	1	\$ -	\$ -
Articulating Wall Mount Bracket	Chief	AS3LD	1	\$ -	\$ -
Sub Total					\$ -
Video System Equipment					
All-In-One Video Conference Soundbar	Poly	Studio X72	1	\$ -	\$ -
Service & Support License - 1-year	Poly	SSP License	1	\$ -	\$ -
Custom Wall Plate w/ HDMI & USB-C (DP Alt Support)	AVC	Wall Plate	1	\$ -	\$ -
Sub Total					\$ -
Audio System Equipment					
Sub Total					\$ -
Control System Equipment					
10" Control Panel	Poly	TC10	1	\$ -	\$ -
Sub Total					\$ -
Equipment Rack & Hardware					
Sub Total					\$ -
Miscellaneous Equipment					
Miscellaneous Bulk Cable, Connectors, Accessories & Hardware	AVC	LOT	1	\$ -	\$ -
Sub Total					\$ -
Non Equipment Costs					
Project Management					\$ -
Engineering / Commissioning					\$ -
Pre-installation / Fabrication					\$ -
Installation / Supervision					\$ -
Sub-Contract Installer					\$ -
Programming					\$ -
G&A / Freight / Delivery					\$ -
Local Sales Tax (As required per jurisdiction)					\$ -
Sub Total					\$ -
BASE ROOM TOTAL					\$ -

Fitness Room

Equipment	Manufacturer	Model No.	Qty.	Unit	Total
Display System Equipment					
75" 4K UHD Interactive Display, Commercial Rated	Viewsonic	IFP7552-1C	3	\$ -	\$ -
In-Wall Display Backbox	Chief	PAC526F	3	\$ -	\$ -
Articulating Wall Mount Bracket	Chief	AS3LD	3	\$ -	\$ -
Sub Total					\$ -
Video System Equipment					
Custom Wall Plate w/ HDMI & USB-C (DP Alt Support)	AVC	Wall Plate	3	\$ -	\$ -
1.2 HDMI Distributor Amplifier w/ HDBT Receiver	Comprehensive	CDA-HDC12018G	1	\$ -	\$ -
Sub Total					\$ -
Audio System Equipment					
0.5" 2-Way In-Ceiling Speaker, 70W, Color TBD	QSC	AD-GST-4LP	6	\$ -	\$ -
2-Channel Audio Amplifier, 70W	QSC	MP-A32W	1	\$ -	\$ -
Sub Total					\$ -
Control System Equipment					
Sub Total					\$ -
Equipment Rack & Hardware					
Sub Total					\$ -
Miscellaneous Equipment					
Miscellaneous Bulk Cable, Connectors, Accessories & Hardware	AVC	LOT	1	\$ -	\$ -
Sub Total					\$ -
Non Equipment Costs					
Project Management					\$ -
Engineering / Commissioning					\$ -
Pre-installation / Fabrication					\$ -
Installation / Supervision					\$ -
Sub-Contract Installer					\$ -
Programming					\$ -
G&A / Freight / Delivery					\$ -
Local Sales Tax (As required per jurisdiction)					\$ -
Sub Total					\$ -
BASE ROOM TOTAL					\$ -

Digital Signage


Equipment	Manufacturer	Model No.	Qty.	Unit	Total
Display System Equipment					
55" 4K UHD Flat Panel Display, Commercial Rated	Samsung	QM55C	1	\$ -	\$ -
In-Wall Display Backbox	Chief	PAC526F	1	\$ -	\$ -
Wall Mount Bracket, Pivotal	Chief	RMF3	1	\$ -	\$ -
Sub Total					\$ -
Video System Equipment					
4K Digital Signage Player w/ 32GB SD Memory Card	Brightsign	HD1025	1	\$ -	\$ -
Sub Total					\$ -
Audio System Equipment					
Sub Total					\$ -
Control System Equipment					
Sub Total					\$ -
Equipment Rack & Hardware					
Sub Total					\$ -
Miscellaneous Equipment					
Miscellaneous Bulk Cable, Connectors, Accessories & Hardware	AVC	LOT	1	\$ -	\$ -
Sub Total					\$ -
Non Equipment Costs					
Project Management					\$ -
Engineering / Commissioning					\$ -
Pre-installation / Fabrication					\$ -
Installation / Supervision					\$ -
Sub-Contract Installer					\$ -
Programming					\$ -
G&A / Freight / Delivery					\$ -
Local Sales Tax (As required per jurisdiction)					\$ -
Sub Total					\$ -
BASE ROOM TOTAL					\$ -

Conference Room

Equipment	Manufacturer	Model No.	Qty.	Unit	Total
Display System Equipment					
75" 4K UHD Interactive Display, Commercial Rated	Viewsonic	IFP7552-1C	1	\$ -	\$ -
In-Wall Display Backbox	Chief	PAC526F	1	\$ -	\$ -
Articulating Wall Mount Bracket	Chief	AS3LD	1	\$ -	\$ -
Sub Total					\$ -
Video System Equipment					
All-In-One Video Conference Soundbar	Poly	Studio X72	1	\$ -	\$ -
Service & Support License - 1-year	Poly	SSP License	1	\$ -	\$ -
USB-C/HDMI 4K Video Wall Plate Transmitter	AV Pro Edge	AC-CXWP-USB-C-T	1	\$ -	\$ -
USB-C/HDMI 4K Video Extender Receiver	AV Pro Edge	AC-EX70-444-RNE-P	1	\$ -	\$ -
Sub Total					\$ -
Audio System Equipment					
Table Top Microphone Expansion	Poly	Mic Pod	1	\$ -	\$ -
Sub Total					\$ -
Control System Equipment					
10" Control Panel	Poly	TC10	1	\$ -	\$ -
Sub Total					\$ -
Equipment Rack & Hardware					
Sub Total					\$ -
Miscellaneous Equipment					
Miscellaneous Bulk Cable, Connectors, Accessories & Hardware	AVC	LOT	1	\$ -	\$ -
Sub Total					\$ -
Non Equipment Costs					
Project Management					\$ -
Engineering / Commissioning					\$ -
Pre-installation / Fabrication					\$ -
Installation / Supervision					\$ -
Sub-Contract Installer					\$ -
Programming					\$ -
G&A / Freight / Delivery					\$ -
Local Sales Tax (As required per jurisdiction)					\$ -
Sub Total					\$ -
BASE ROOM TOTAL					\$ -

Headmaster's Office

Equipment	Manufacturer	Model No.	Qty.	Unit	Total
Display System Equipment					
75" 4K UHD Interactive Display, Commercial Rated	Viewsonic	IFP7552-1C	1	\$ -	\$ -
In-Wall Display Backbox	Chief	PAC526F	1	\$ -	\$ -
Articulating Wall Mount Bracket	Chief	AS3LD	1	\$ -	\$ -
Sub Total					\$ -
Video System Equipment					
All-In-One Video Conference Soundbar	Poly	Studio X72	1	\$ -	\$ -
Service & Support License - 1-year	Poly	SSP License	1	\$ -	\$ -
Custom Wall Plate w/ HDMI & USB-C (DP Alt Support)	AVC	Wall Plate	1	\$ -	\$ -
USB-C/HDMI 4K Video Wall Plate Transmitter	AV Pro Edge	AC-CXWP-USB-C-T	1	\$ -	\$ -
USB-C/HDMI 4K Video Extender Receiver	AV Pro Edge	AC-EX70-444-RNE-P	1	\$ -	\$ -
Sub Total					\$ -
Audio System Equipment					
Sub Total					\$ -
Control System Equipment					
10" Control Panel	Poly	TC10	1	\$ -	\$ -
Sub Total					\$ -
Equipment Rack & Hardware					
Sub Total					\$ -
Miscellaneous Equipment					
Miscellaneous Bulk Cable, Connectors, Accessories & Hardware	AVC	LOT	1	\$ -	\$ -
Sub Total					\$ -
Non Equipment Costs					
Project Management					\$ -
Engineering / Commissioning					\$ -
Pre-installation / Fabrication					\$ -
Installation / Supervision					\$ -
Sub-Contract Installer					\$ -
Programming					\$ -
G&A / Freight / Delivery					\$ -
Local Sales Tax (As required per jurisdiction)					\$ -
Sub Total					\$ -
BASE ROOM TOTAL					\$ -

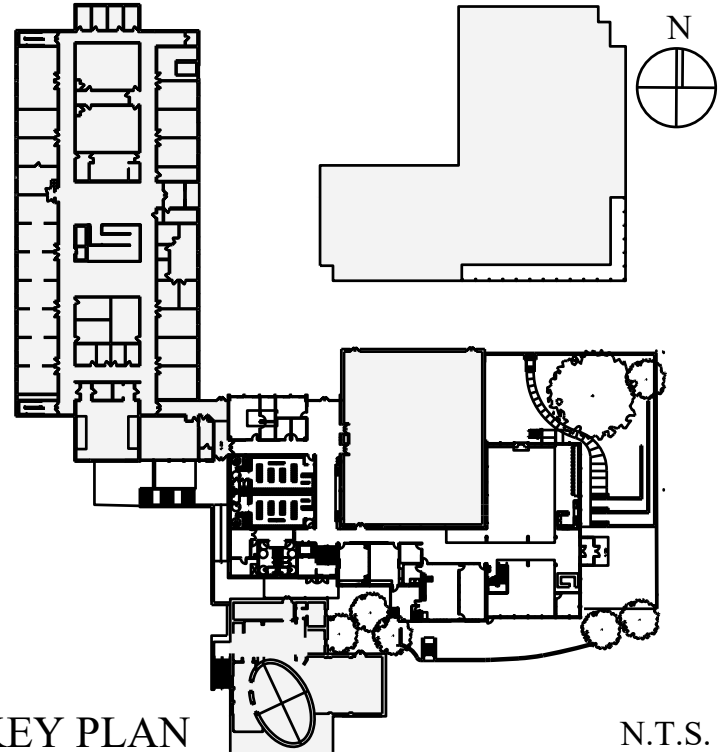

KEY PLAN

N.T.S.

	02/16/2026	ISSUE FOR CONSTRUCTION - BULLETIN 01	
	01/19/2026	ISSUE FOR CONSTRUCTION - REVISED SCOPE	
	01/19/2026	ISSUE FOR CONSTRUCTION	
No.	Date	Revision	
ARCHITECT		STRUCTURAL ENGINEER	
PETER GISOLFI ASSOCIATES, LLP		DRIFELL CONSULTING ENGINEERS	
566 WARBURTON AVENUE		43 MAIN STREET	
HAUSTINGS-ON-HUDSON, NY 10706		NYACK, NY 10960	
T: (914) 478-3677		T: (845) 727-7793	
MEP ENGINEERS		ROOFING CONSULTANT	
NIEMEN VENGALA PLLC		WATSKY ASSOCIATES	
48 PURCHASE STREET		20 MADISON AVENUE	
EVE, NY 10586		VALHALLA, NY 10595	
T: (914) 962-8609		T: (914) 948-3430	
CODE CONSULTANT		SPECIFICATIONS	
MILROSE CONSULTING		MILROSE CONSULTING	
500 SUMNER STREET, STE 501		500 SUMNER STREET, STE 501	
STAMFORD, CT 06901		STAMFORD, CT 06901	
T: (203) 564-9991		T: (203) 564-9991	
AV-IT SEC CONSULTANT		SPECIFICATIONS	
ROBINETTE TECHNOLOGIES CORP.		ROBINETTE TECHNOLOGIES CORP.	
116 WEST 32ND STREET		116 WEST 32ND STREET	
NEW YORK, NY 10001		NEW YORK, NY 10001	
(212) 643-9055		(212) 643-9055	
GEOTECHNICAL ENGINEER (BY OWNER)		CIVIL ENGINEER (BY OWNER)	
LANSAN CT, INC.		RIDNESS AND MEAD	
555 LONG WHARF DRIVE		21 FIRST STREET	
NEW HAVEN, CT 06595		STAMFORD, CT 06905	
(203) 562-9771		(203) 327-0500	

Stamp

Project Title

KING SCHOOL

UPPER SCHOOL

CRI/COMMONS

ADDITION PROJECT

1450 Newfield Avenue

Stamford, CT 06905

Drawing Title

AUDIOVISUAL

COMPONENT LIST

Scale	Job No.	Date	Drawing No.
	12219.00	12-18-25	
Drawn	Checked	Approved	TA-802.00
Peter Gisolfi Associates Architects • Landscape Architects, LLP 566 Warburton Avenue Hastings on Hudson, NY 10706 (914) 478-3677			
PETER GISOLFI ASSOCIATES LLP			
MGE Unified Technologies Corp. 116 West 32nd Street, 12th Floor New York, N.Y. 10001 P 212.643.9055 info@mgeupc.net www.mgeupc.com			

SECTION 234116
INTEGRATED AUDIOVISUAL SYSTEMS AND EQUIPMENT

1.1 SCOPE OF SPECIFICATION

- A. This specification covers all Audiovisual Systems as described herein for The King School. The Contractor shall provide fully-functional systems, completely installed and ready to use.
- B. All Audiovisual, Telecom, and Electrical drawing and equipment lists pertaining to this specification shall be considered as a part of this specification.

C. Drawings and specifications are the property of the Owner and are not to be used on any other project or work.

1.2 RELATED DOCUMENTS

- A. AV series drawings, including floor plans, elevations and signal diagrams.
- B. AV Equipment spreadsheet.

1.3 DEFINITION OF TERMS

- A. The term "Owner" refers to The King School.
- B. The term "Architect" refers to Peter Gisolfi Associates.
- C. The term "Consultant" refers to MGE Unified Technologies Corp.
- D. The term "Bidder" is the Audiovisual Contracting firm (the Integrator) submitting a bid response to this specification.
- E. The term "AV Contractor" is the firm that has been awarded the contract for this specification and has responsibility for the performance specified herein pertaining to the audiovisual systems and equipment.
- F. The term "General Contractor" refers to URC Construction.
- G. The term "Sub-Contractor" is any firm or individual hired by the Contractor to perform any of the work detailed herein.
- H. The term "Equipment" refers to any and all items, off-the-shelf or custom, used to assemble the system.
- I. The term "System" refers to singularly and/or collectively, the complete, interconnected assemblage of equipment as specified and intended herein.
- J. The term "Hearin" refers to the audiovisual drawing and specifications.
- K. The term "N.I.C." (Not in Contract) refers to material or labor related to, or that functions as part of, the audiovisual system which is not within the scope of work for this specification but is to be furnished or installed by other Contractors.
- L. The term "O.I.E." (Owner Furnished Equipment) refers to equipment provided by the Owner. Contractor shall be responsible for installing and integrating this equipment into the system.
- M. Equipment designated as FUTURE shall have wiring and connectors provided, ready for installation of the equipment itself, as indicated on the Block Diagram drawings.
- N. The term "Provide" means furnish and install.
- O. The term "Shall" is a mandatory directive.
- P. The term "Will" is informative.

1.4 CONTRACTOR RESPONSIBILITY

- A. The Contractor shall furnish all equipment and materials to ensure a complete and operating system. The NIC and OFE equipment and materials are specifically exempted from this requirement.
- B. The Contractor shall survey all OFE equipment prior to installation to confirm they are accurate to their description and are in good working order.
- C. It is the responsibility of the Contractor to ensure that the work herein described shall be complete in every detail necessary to provide a complete, properly functioning system in compliance with all requirements of this specification.
- D. The Contractor shall verify the data rate supported by each shielded twisted pair cable used for AV distribution.
- E. The Contractor shall generate all shop drawings, materials and technical information for the complete installation and wiring of the system.
- F. The Contractor shall provide the on-site installation and wiring and shall provide on going supervision and coordination during the implementation phase.
- G. The Contractor shall not subcontract any project team member (defined herein as engineer, programmer, project manager, or technician) without prior notification of and approval from the Consultant and/or Client.
- H. The Contractor shall be responsible for systems adjustment from initial adjustment through final balancing as herein prescribed and shall provide all test equipment for the system checkout and acceptance tests. Failure to accurately adjust system parameters (as per manufacturer's specifications and in accordance with all performance specifications set forth in this specification) will require that the AV Contractor re-perform all adjustments from the beginning of the process and compensate other project team members for time lost due to the need to repeat procedures.
- I. The Contractor shall assign a dedicated senior project manager and senior engineer. These individuals are expected to actively participate for the life of the project.
- J. The Contractor shall assign a dedicated senior project manager and senior engineer to participate in the room close out process to streamline the punchlist closure and room turnover process.
- K. The Contractor shall assign a senior engineer with advanced audio training to oversee the audio balancing and adjustment for all systems (this shall not be left to the base installer). This engineer shall manage the creation and distribution of standardized audio site files internally and assist in the revision of files as required. The individual shall also assist in the troubleshooting and resolution of any discrepancies with the audio systems not performing properly due to infrastructure or room acoustic issues.

1.5 DESCRIPTION OF AUDIOVISUAL SPACES

- Reception Desk**
- o Multimedia Presentation:
 - 65" 4K display with wall mounted bracket for digital signage presentation capabilities
- Student Common Area**
- o Multimedia Presentation:
 - 4K projection system with wall mounted bracket for multi-media presentation.
 - 156" corner 4K video projector with wall mount bracket w/leg
 - 150" projection screen, ceiling recessed, motorized
 - Local wall plate input with video extender
 - o Sound reinforcement:
 - 12x in-ceiling speakers for audio playback
 - Audio processor / mixer with 4-channel audio amplifier
- Aggie Classroom**
- o System solution is under development.
- Innovation Lab**
- o Multimedia Presentation:
 - Two (2) 75" 4K displays with wall mounted brackets for multi-media presentation and video conferencing capabilities.
 - Poly video soundbar per location
 - Local wall plate input per location for presentation
 - Video distribution to show content from primary display to secondary display.
 - Poly control panel to be wall mounted near display
- Typical Classroom**
- o Multimedia Presentation:
 - 75" 4K displays with wall mounted brackets for multi-media presentation and video conferencing capabilities
 - Poly video soundbar
 - Local wall plate input for presentation
 - Poly control panel to be wall mounted near display
- Athletics Office**
- o Multimedia Presentation:
 - 55" 4K displays with wall mounted brackets for multi-media presentation and video conferencing capabilities.
 - Poly video soundbar
 - Local wall plate input for presentation
 - Poly control panel on meeting table
- Athletics Trainers Area**
- o Multimedia Presentation:
 - 75" 4K displays with wall mounted brackets for multi-media presentation
 - Local wall plate input for presentation
- Headmaster's Office**
- o Multimedia Presentation:
 - 75" 4K displays with wall mounted brackets for multi-media presentation and video conferencing capabilities.
 - Poly video soundbar
 - Table plate input with extension for presentation
 - Poly control panel on meeting table
- Conference Rooms**
- o Multimedia Presentation:
 - 75" 4K displays with wall mounted brackets for multi-media presentation and video conferencing capabilities.
 - Poly video soundbar
 - Table plate input with extension for presentation
 - Poly control panel on meeting table
- Collaboration Rooms**
- o Multimedia Presentation:
 - 75" 4K displays with wall mounted brackets for multi-media presentation and video conferencing capabilities.
 - Poly video soundbar
 - Table plate input with extension for presentation
 - Poly control panel on meeting table
- Fitness Room**
- o Multimedia Presentation:
 - Three (3) 75" 4K displays with wall mounted brackets for multi-media presentation
 - Local wall plate input for presentation at each display
 - Video distribution to show content from primary display to secondary displays.
 - o Sound reinforcement:
 - 6x in-ceiling speakers with 2-channel amplifier for audio playback of primary display content
- Typical Digital Signage**
- o Multimedia Presentation:
 - 55" 4K display with wall mounted bracket for digital signage presentation capabilities

1.6 SCOPE OF WORK

- A. Audiovisual scope shall include testing, certification, training and complete close out package with all codes, passwords etc.
- B. The scope of work comprises the final engineering, design, supply, installation, testing, commissioning, maintenance and defects liability

- service of materials, labor and equipment for the complete Audiovisual System(s) installation.
- C. This Specification, in conjunction with the Drawings, establishes the requirements necessary to achieve the intended performance, installation and functions of the AV Digital Transport and Distribution System.
- D. Contractor shall provide the services necessary to furnish, install, train, and to provide maintenance support for the Digital Transport and Distribution System including all required peripheral apparatus conforming to acceptable industry standards. All work shall be in accordance with the true intent of these Drawings and Specifications, and as required to leave the Digital Transport and Distribution System complete and in satisfactory operating condition.
- E. Verify dimension and conditions at the job site prior to installation, and perform installation in accordance with these Specifications, Manufacturers recommendations and the latest edition or revision of all applicable codes and standards.
- F. The Digital Transport and Distribution System shall include providing and integrating the following principal systems:

- Audio/Video switching.
- Audio/Video distribution at native resolution without compression.
- Video interface equipment.
- Audio interface equipment.
- HDMI signal transport.
- Deep Color support.
- Resolution management.
- HDCP key handling/management.
- Digital diagnostic tools.
- The Digital Transport and Distribution System shall operate as a standalone point-to-point system delivering local content to a far-end sink (display). It shall also operate as part of a larger matrix switching system.
- Coordination work shall include full coordination with other trades and is to be provided with claims to be rectified at their cost. Coordination shall include, but not be limited to: on-site visits and meetings with the other trade contractors, providing technical information, assistance and direction with respect to their work and field conditions as they may affect compliance with these specifications.
- Furnish all materials, labor, tools and transportation, supervision, coordination and engineering services necessary to provide complete and professionally installed systems that comply with all requirements herein. Labor furnished shall be specialized and experienced in Audiovisual System installation.
- All materials shall be new and shall conform to applicable provisions of Underwriter Laboratories and the American Standards Association.
- Provide all required direction and supervision of all labor performing any work detailed herein, including AV Contractor's Sub-Contractor work, to ensure compliance with the specifications. This refers especially to site work. Because of the complexity of the system, the supervision of each sub-contracted work cannot be intermittent, but shall be continuous during the installation.
- Provide and install all wire and cable required and make all necessary terminations and connections.
- Coordinate all conduit and backbox installation with the Electrical Contractor to ensure proper performance & function of the complete system.
- Coordinate AC power, lighting, and electrical grounding installation with the Electrical Contractor to ensure proper performance and function of the completed system.
- Coordinate structural work with the Construction Manager to ensure proper fit, positioning, and support for audiovisual equipment.
- Provide protection screen installation with the Construction Manager to ensure proper performance and function of projection systems.
- Coordinate millwork fabrication and installation with the Construction Manager to ensure proper fit and function of audiovisual equipment.
- Provide any additional items not specifically mentioned herein but necessary to the proper performance and function of the system. Without claim for additional payment, such items may include hardware, transformers, power supplies, line/distribution amplifiers, pad attenuators and other devices for proper installation, interface, isolation, or gain structure.
- Furnish shop drawings and all equipment cut sheets. Contractor to receive written approval prior to fabrication, assembly and installation.
- Perform initial adjustments and verification test. Submit verification test report to client and consultant.
- Contractor's Project Manager, Engineer and Programmer shall participate in Consultant's system commissioning at the Contractor's facility prior to shipping the system(s) to site for installation.
- Contractor shall adhere to all known good installation practices.
- Instruct the Owner in the operation of the system.
- Contractor's Project Manager, Engineer and Programmer shall participate in acceptance testing and perform final adjustments as required by the Consultant.
- Provide (3) weeks of system completion provide all system documentation, including copies of all relevant drawings and equipment manuals.

- Itemized equipment list with manufacturer information and serial numbers for every room.
- Test results from pre and post installation as described elsewhere in this specification.
- As-built drawings for every item and system. Final, approved copies shall be provided as noted, in addition to laminated hard copies in 11x17 format that shall be provided to the equipment rack of each room.
- Final software code to include all adjustments and settings for controller, panel, and DSP in each room. This shall include jump of each touch panel page.
- End User Operation Manuals
- A contact list of key individuals, engineer, lead tech, site lead, etc. who may be contacted should a question or problem arise. Name, title, telephone number, cell phone number, and e-mail address shall be listed for each individual.
- The Contractor shall have sole responsibility for the satisfactory implementation of each system, even though the Contractor may have sub-contracted a portion of the installation or had certain manufacturers install their own equipment.

1.7 STATUS REPORTS

- A. The Contractor who is awarded the project, is responsible for providing weekly status reports outlining his progress on the project. These reports should include information on the work completed during the week, the work to be completed during the upcoming week and any potential scheduling or field issues that may arise. The following should be included in this Status Report: (not limited to)
- Expected date of project submittals, including equipment cut sheets, shop drawings, control system designs and any other related reports.
 - Anticipated completion date and outlined percentage completion of in-house rack fabrication and testing, prior to shipping equipment to the jobsite.
 - Anticipated completion date and percentage completion of control system programming, prior to shipping equipment to the jobsite.
 - Schedule and percentage completion of on-site wiring and supervision.
 - Schedule and percentage completion of on-site installation.
 - Schedule Dates for Owner training once project is completed.
 - Schedule for systems checked and turnover to the Owner.

1.8 RELATED WORK FURNISHED AND INSTALLED BY OTHERS

- A. Refer to applicable Electrical, Mechanical, Telecommunications, Architectural and Structural drawings:
- Electrical and Mechanical.
- Permanently installed audiovisual controls, viewports, backboxes, junction boxes, pull boxes, floor boxes, floor pockets, receptacle boxes, and ceiling loudspeaker enclosures; unless otherwise noted.
 - AC power system feeders, isolation transformers, power conditioners, uninterruptible power supply (UPS), electric panels, circuits, conduit, branch circuits, "convenience" receptacles and receptacles required for the audiovisual equipment.
 - Room lighting fixtures, switches, dimmers, and dimming systems and low voltage interface control panels.
 - AV Control System shall be capable of communicating with the Lighting Control System. A/V Contractor and Electrical Contractor to coordinate appropriate connections.
 - Window shade, curtain, or drapery motors and their control and low voltage interface control panels.
 - Available door motors and their control.
 - Fire prevention and safety devices.
 - HVAC systems (heating/ventilation/air conditioning). Architectural and Structural
 - Structural work, wall openings, platforms, railings, stairs.
 - Millwork, shelving, rough and finished trim, painting, patching, glazing
 - Carpets, floor covering, "computer" access floors, drapes, shades, blinds, acoustical treatments.
 - Ceilings, suspended ceiling, ceiling structures.
 - Movable furniture, table, desks and chairs.
 - Support structures and enclosures for audiovisual loudspeaker cabinets, projectors, video monitors, etc.

Telecommunications

- All data wiring and receptacles.
- Riser Ranges for all cable and conduit pathways.
- Cable Television feeder service entrance and TV outlet drop cabling.

Owner Furnished Equipment

- The AV Contractor shall be responsible for removing and/or uninstalling OFE equipment from the Owner's location and re-installing to the new facility and/or room. At the AV Contractor's facility, he shall ascertain that the OFE equipment is configured at or above factory specifications. AV Contractor shall submit verification test documentation to MGE-UTC and client.
- If the equipment is not operating "as new", or is missing accessories necessary to properly integrate the equipment into the system as intended, the AV Contractor shall provide a proposal, including a time line, for returning the equipment to "as-new" condition and providing the needed accessories.

1.9 BID SUBMITTAL INFORMATION

- A. Bid Conditions.
- All bids shall be submitted for equipment, materials and labor as specified herein.
 - Bidders shall read all sections of this specification and examine all related drawings in order to avoid omissions, duplications and to ensure a complete job. While efforts have been made to avoid shop, discrepancies between the drawings and specifications or obvious omissions or duplications shall be referred to the Construction Manager and/or Consultant for clarification no later than three (3) weekdays before the bid closing date.
 - Where discrepancies, duplications or omissions occur, and pre-bid instructions have not been obtained, the contractor agrees to abide by the Consultant's decision.
 - Bi/submittal prices shall be valid for a minimum of sixty (60) days.
 - All bids are to be submitted as described in the covering documentation.
 - No extensions will be granted for any reason.
 - The Contractor shall not subcontract any project team member (defined herein as engineer, programmer, project manager, or technician) without prior notification of and approval from the Consultant and/or Client.

- B. Qualifications
- Bidder shall demonstrate compliance in writing with all the following requirements:
- Confirmation of regular business conditions under the present name and/or address during the previous five (5) years. The number of years in business under a previous name or company.
 - Successful completion, with present key staff, of five (5) projects of the type and/or magnitude of that specified herein.
 - At least five years experience in the fabrication, assembly, and installation of audiovisual systems of similar magnitude and quality as specified for the subject job, and shall submit documentation to this effect with the bid return.
 - Identify the project principle, project manager, project engineer and key staff. Indicate the percentage of time to be dedicated to the project.
 - Each bidder shall list staff to be assigned to the project that has (a) specific manufacturer certification (i.e., Bang, Cisco, QSC, Creston), (b) professional certification, and (c) Avia certification.
 - Indicate the team member's name and specific job function on the project
 - Provide resumes and certifications of key personnel.
 - Locations of all currently staffed and operational offices complete with the number of technical support personnel in each office.
 - Each bidder shall maintain an adequately equipped and staffed service department and shall regularly provide service for systems

similar to this design. This shall include an office staffed with personnel at all times, Monday through Friday, between the hours of 8:00 AM and 5:00 PM. Answering services, cellular telephones, pager numbers and call forwarding systems for after hours emergency service.

- Each bidder shall have at least one supervisory employee possessing a certificate, from either AVIXA or another recognized organization or institution, providing formal training in audiovisual engineering or installation. Proof of this shall be supplied with bid.
- Each bidder shall have at least one supervisory employee possessing a Bachelor or master's degree in Electrical Engineering. Proof of this shall be supplied with bid. Trade school degrees are not acceptable.
- All employees and/or the contractor to install this system must be competent technicians who are experienced in the installation and interconnection of professional audiovisual systems.
- Each bidder shall be currently authorized by the manufacturer of the major components of the system to sell their products and tolerate warranty service or on the same items. Major components of the system shall include, but not be limited to, data/video projectors, video processing equipment, audio processing equipment, power amplifiers, speakers, etc. Proof of this may be requested during the bidding process. Proof of franchise shall be in the form of a letter from the audiovisual manufacturer addressed to the consultant stating that the contractor is currently authorized to sell their products. Letters from the sales representative (reps) shall not be accepted as proof.

C. Equipment Costs

- The bid return shall include detailed lists of all equipment to be supplied. Each piece of equipment shall be individually priced. Equipment list spreadsheets are provided herein under the Specifications. Copies of these lists shall be used, with the appropriate price information attached.
 - The design intent of the system may require equipment not listed in the bid spreadsheets, but are indicated elsewhere in the contract documents, in either the drawings or the written specification. It is the site responsibility of the Bidder to reconcile the contract documents with the equipment and labor required for the project.
 - Equipment costs shall reflect all required modifications and accessories. All substitutions for specified equipment shall be listed and individually priced on a separate page.
 - Equipment totals from each equipment list shall be entered in a Master Recapitulation of Costs form.
 - No claims for additional equipment required will be allowed, if the sole reason for such claims is that the equipment was not listed in the attached spreadsheet. It is the sole responsibility of the Bidder to verify the completeness of the equipment list.
- D. Non-Equipment Costs
- Non-equipment costs shall be furnished on the Master Recapitulation of Costs form. These non-equipment costs shall be detailed for each of the following categories:
 - Engineering, Project Management, and Programming:
 - Including all required design, shop drawings, schedules, manuals, documentation, etc.
 - Pre-installation:
 - Including all fabrication, modifications, assembly, rack wiring, custom work, etc. performed on the Contractor's premises.
 - Sub-contract (for on-site installation):
 - Lump sum total for work to be provided by the jobsite electrical and/or General Contractor. This work shall include all field cable pulling, equipment mounting, wiring of equipment racks in place, and field wiring termination, etc. performed on the Owner's premises.
 - Installation:
 - Provide supervision of the on-site electrical/subcontract installation work: cable pulling, equipment mounting, setting of equipment racks in place, and field wiring terminations. Provide coordination, testing, initial wiring, owner instruction, etc. performed on the Owner's premises.
 - General and Administrative:
 - (1) Including all overhead expenses, transportation, reproduction, shipping, insurance and guarantees.
 - Taxes:
 - (1) Include all applicable taxes as required.
 - Totals:
 - (1) Sums for each column and row of the Master Recapitulation form in the Grand Total.

E. Substitute Equipment

- Substitute equipment may be proposed but shall be in addition to the "as specified" bid and separately proposed and will be identified as "alternates" with equipment costs shown separate and apart from the costs of the equipment "as specified".
- Equivalency in quality, performance, construction and function shall be demonstrated by submitting, as applicable or requested by the Consultant, the following:
 - Technical data sheets and specifications.
 - Technical information and equipment test data.
 - List of references to the Owner.
 - Cost and comparative differences between the alternate and the specified equipment or bid.
- The drawing and specifications are based on specific equipment, functions and arrangements. Contractors or revisions to equipment, materials and labor may be necessary for the proper function and fit of any proposed substitute items to the purpose, arrangement and/or originally indicated. It is the responsibility of the Bidder to provide additional bids and/or revisions to identify them in the bid submittal.
- Costs for any additional labor and additions or revisions to wiring, space requirements, equipment or other materials, required for the use of substitute equipment shall be included by the Bidder without claim for subsequent additional payment.
- Consideration in the bidding for a proposed substitute will be given only if, in the opinion of the Consultant, the substitute is equal to and/or offers significant advantage to the Owner over the specified item.

1.10 AWARD OF CONTRACT

- A. The quoted prices shall remain firm for a minimum of sixty (60) days.
- B. The Owner reserves the right to reject any or all bids for any reason. Some of the reasons for rejection may include:
- Insufficient experience of the contractor and/or company.
 - Failure to meet one or more of the requirements.
 - An unreasonably high or low bid in relation to the estimated cost of the audiovisual system.
 - Failure to provide sufficient documentation with the bid that the company is capable of installing a complete and functional system in keeping with the intent of these specifications.
- C. The successful bidder may be required to issue a performance bond.
- D. The successful bidder will be required to visit the site within four (4) days after award of contract.
- Coordinate accessibility to the site with the Construction Manager.
 - Report to, and receive clarification from, the Consultant any discrepancies between this specification and existing conditions and similarly report obvious omissions.
 - No subsequent additional payment will be made due to failure to follow or verify conditions which may affect the work.
 - Prior to purchase, the AV Contractor shall determine if any components or part numbers are anticipated to be discontinued or replaced during the life of the project and advise MGE-UTC and the project team and/or the Consultant that recommended alternate equipment and provide cost estimates and specification sheets for review. All changes shall be documented and tracked by the AV Contractor.

1.11 SHOP DRAWING SUBMITTAL

- Prior to fabrication, submit detailed shop drawings to the Engineer for approval. Do not begin installation or fabrication without such approval.
- Shop drawing shall be provided clearly depicting any proposed modification to the project drawings. Any modifications shall be highlighted on the shop drawings.
- The Contractor shall submit to the Consultant, for approval, any custom designs pertaining to the systems.
- Drawing submittals shall be in reproducible media and DVD/CD-ROM.
- Complete system construction and point to point wiring schematic drawings, including all component values, and showing connection letter and number identification of all wire and cable as well as jacks, terminals and connectors. All connectors are to be shown; a detail sheet with "typical" connection diagrams is not acceptable.
- Shop drawings shall include proposed mounting arrangements and details of all equipment, including positioning devices, framework supports and interface with adjacent architecture.
- It is intended that any contractor furnishing materials and/or labor necessary for the completion of this specification shall furnish it in compliance with this specification. Where conflict exists with other specifications concerning such materials and labor, this specification takes precedence unless otherwise approved in writing by the Engineer.
- All control system panels, both touch panel based and control computer based.
- All control system front panel layouts, where applicable.
- All panels, plates, and designation strips, including details relating to terminology, engraving finish, and color.
- All custom designed consoles, tables, carts, support bases and shelves.
- Schematic drawings of all custom components, assemblies and circuitry, including wall and/or floor plates.
- Field wiring details and flow (system) schematic drawings.
- Patch panel assignment layout drawings.
- Front mechanical drawings of each equipment rack.
- Submit drawings electronically as full-size PDF files, or as directed.
- Submit cut sheets or data to the Owner, for "as specified" equipment as directed by the Architect/ Owner's/ Construction manager.
- Locations shown herein are approximate. Base shop drawings on actual equipment, installation, and field conditions. Where possible, make equipment and field measurements prior to the preparation of shop drawings, fabrication and installation to ensure proper fit and function of the equipment. However, this requirement shall not delay the progress of the work. Allow for trimming and fitting wherever the taking of field, or other measurements, before fabrication might delay the work. Costs for failure to coordinate equipment details with site conditions and designated equipment locations shall be borne by the AV Contractor.
- The review and approval of shop drawings shall be general only and shall not relieve the AV Contractor from responsibility for proper design, engineering and installation, for deviations from the specifications or drawings due to field conditions; conflict with the work of other trades or other approvals, before fabrication might delay the work. Costs for failure to coordinate equipment details with site conditions and designated equipment locations shall be borne by the AV Contractor.
- Shop drawings shall include and clearly identify any proposed modification of the specifications or drawings.
- Verification of the focal length of projection lenses to achieve the specified image size.
- Shop drawings shall include all items of equipment, whether a stock manufactured item or custom-built item shall be supported by complete and detailed schematic drawings and replacement parts lists. No "black boxes" or unidentified components shall be acceptable under this specification.
- Shop drawings shall be produced by the AV Contractor from the Consultant's contract drawing set, and be generated in AutoCAD (no later than version 14), with a color convention, and drawing numbers as directed by the Consultant. The drawings shall consist of:
 - Cover Sheet identifying the following:
 - Name and location of project.
 - Name and address of the AV Contractor.
 - Design for which the drawings are for: "Audiovisual System".
 - Notes, symbols, schedules, wiring details, grounding details, including and in addition to those in the contract drawings.
 - Floor plans of each floor, indicating AV Areas and Drawing numbers of the associated Audiovisual Facilities Part Plans.
 - AV Facilities Plans shall indicate the AV equipment layout plan, sections proving no obstruction of projected images, and elevations depicting projected images.
 - AV Electrical Plans shall indicate conduit sizes, quantities and wire pulls for the purpose of field wiring. Include wire run sheets, cable termination schedules, and any other field wiring details.
 - System drawings for audio, video, and control systems showing point-to-point wiring interconnections of all equipment with cable numbers. Include manufacturer and part number of all cable, jacks, terminal blocks, and connectors.
 - Mechanical drawings, in full size, for all custom fabricated metal work items such as connector panels, control panels, connector or grouted wall plate assemblies, and mounting base assemblies. Include all dimensions, materials, and materials of construction details. Submit samples of lettering, label sizes and typeface to be used on custom panels, panels and other equipment.
 - Mechanical drawings for any custom fabricated wood and millwork items and assemblies including all dimensions, materials, and construction details.

1.12 SAMPLES

- Submit samples of substitute materials or equipment to, and as required by, the Consultant to prove equivalency to items specified or satisfactory to the system.
- Submit samples of custom work, finishes or other materials to, and as required by, the Consultant to verify appearance and quality.
- Submit cabling samples of all low voltage cabling, properly labeled, at a minimum of one foot sample with stripped ends.
- All costs for shipping samples shall be borne by the Contractor.

1.13 JOB CONDITIONS

- Keep the job adequately staffed at all times. Unless illness, loss of personnel or other circumstances beyond the control of the Contractor intervene, keep the same individual in charge through completion of the project.
- Cooperate with all appropriate parties in order to achieve well coordinated progress with the overall construction completion schedule and acceptable final results.
- Watch for conflicts with the work of other Contractors on the job and execute, without claim for additional payment, moderate moves or changes as necessary to accommodate the work of others or to preserve symmetry and pleasing appearance.
- Immediately report to the Consultant any design or installation irregularities or conflicts, particularly architectural elements, that interfere with the screen viewing, intended angles or projection, or loudspeaker coverage, so that appropriate action may be taken.
- Do all cutting, patching and painting necessary for proper and finished installation of the system and repair any damage done as a result of the installation.
- Clean up and dispose of all trash on a regular basis from all system work areas.

1.14 QUALITY ASSURANCE

- Equipment and materials supplied shall be complete, model numbers accurate and performance shall conform to manufacturer's specifications.
 - All equipment and materials shall be new and shall conform to applicable provisions of Underwriters Laboratories and the American Standards Association.
 - Repair or replace any items damaged during installation.
 - Procure and pay for all necessary permits, licenses, inspections, and observe any requirements stipulated therein.
 - Comply with all applicable federal, state, and local labor regulations and applicable local union and trade regulations.
 - The installation shall conform to the latest federal, state and local electrical and safety codes and regulations or codes and regulations of other authorities having jurisdiction. Where conflicts exist, the most stringent code or regulations shall apply.
 - The system shall be registered under the most current applicable ratings of the Federal Communications Commission (FCC). Provide the FCC registration number with the equipment submittal. All components and installations shall bear an Underwriters Laboratories (UL) listing and shall conform to the latest edition or revision of the applicable codes and standards as required:
- ANSI - American National Standards Institute
 - ASTM - American Society for Testing and Materials
 - BCSA - Building Industry Consulting Services International
 - EIA - Electronics Industries Association
 - FCC - Federal Communications Commission
 - ICEA - Insulated Cable Engineers Association
 - IEEE - Institute of Electrical and Electronics Engineers
 - ISO - International Organization for Standardization
 - NEC - National Electrical Code
 - NEMA - National Electrical Manufacturer's Association
 - NFPA - National Fire Protection Association
 - UL - Underwriters Laboratories, Inc.
- H. The code or standard establishing the more stringent requirements shall be followed where areas of conflict occur between codes and standards or between codes and standards and drawings and Specifications.

1.15 CLOSE OUT DOCUMENTATION

- A. Within two (2) weeks of system completion provide all system documentation, including copies of all relevant drawings and equipment manuals.
- Itemized equipment list with manufacturer information and serial numbers for every room.
 - Test results from pre and post installation as described elsewhere in this specification.
 - As-built drawings for every item and system. Final, approved copies shall be provided as noted, in addition to laminated hard copies in 11x17 format that shall be provided to the equipment rack of each room.
 - Final software code to include all adjustments and settings for controller, panel, and DSP in each room. This shall include jump of each touch panel page.
 - End User Operation Manuals
 - A contact list of their key individuals, engineer, lead-tech, site lead, etc. who may be contacted should a question or problem arise. Name, title, telephone number, cell phone number, and email address shall be listed for each individual.

1.16 SERVICE CONTRACT

- A. All systems, equipment and components shall be guaranteed free of defects in materials and workmanship for a period of one (1) year from the date of acceptance by Owner. Repair and replace such items within twenty-four (24) hours following report of defects by the Owner.
- B. The Bidder shall offer a separate annual service contract by pricing for five (5) years on a year-to-year basis, covering all installed systems. This service contract shall cover a minimum of four (4) visits per year, at regular intervals, to perform operation checks of the equipment. The service contract shall commence immediately after expiration of the warranty period. Use per item price for the service contract shall be submitted with the bid.
- C. All manufacturer equipment warranties shall be activated in the Owner's name and shall commence on the date of system acceptance. In the case of Contractor modified equipment, the manufacturer's warranty may be voided. In such cases provide a warranty equivalent to that of the original manufacturer.
- D. The Contractor shall be available on call and on twenty-four (24) hour notice without cost to the Owner during the two weeks of operation following acceptance of the system by the Owner to assist him or his representative in any operational problems that may arise during this initial period of operation.
- E. Service Contract Pricing Requirements: Bidder shall provide separate item pricing for each year of the five (5) year service contract. Pricing shall include:
- Annual lump sum amount.
 - Hourly labor rate for service calls outside contract coverage.
 - Hourly overtime/after-hours rate.
 - Cost for replacement parts not covered (if any).
 - Any optional extended coverage tiers.

F. Service Contract Coverage Definition

- Under scope of services, the Contractor shall state what is included and excluded, including:
 - labor for troubleshooting and repairs.
 - Preventative maintenance visits.
 - System firmware, software, OS and security updates.
 - Calibration and tuning of DSP, display, camera and microphones.
 - Replacement of failed components.
 - Loaner equipment availability during repair.

G. Response/Resolution Times:

- Contractor shall provide the following minimum response times:
 - Critical system failure: 4 hour response, 24 hour onsite repair.
 - Non-critical function: Next business day response, 72 hour resolution.
- Remote support: Immediate phone response within 1 hour.

H. Remote monitoring:

- Contractor shall provide optional pricing, if applicable for remote system monitoring.

I. Replacement parts and loaner equipment:

- Bidders shall indicate if replacement parts are fully covered, partially covered, or excluded. If parts are excluded, provide a price.
- Contractor shall provide loaner equipment for critical components when repairs exceed 7 days.

1.17 INSURANCE

- All equipment and materials shall be fully insured against loss or damage from vandalism, theft, fire, etc.
- Certificates of Insurance for Workman's Compensation and Liability for all personnel shall be provided to the Owner and be kept on file.
- Keep insurance in full force up until acceptance of the system by the Owner or until the Owner reviews the Contractor is writing of this responsibility, whichever is earlier.


PART 2 - PRODUCTS

2.1 MAJOR EQUIPMENT

- A. Refer to the Audio-Visual Equipment spreadsheet for a list of all major components, including manufacturers, part numbers and quantities. Contractor shall provide any additional components required to deliver a turn-key installation that provides the functionality described in Section 1.1.
- B. Contractor shall include tax on all equipment specified herein for bids and budget purposes or as directed by the GC/CM administering the bid.
- C. Detailed performance specifications for equipment shall be those published by the manufacturer effective on the date of this document for all equipment models number listed herein.
- D. Provide, if available from the manufacturer, rack mount kits for equipment shown to be rack mounted on displays. Provide Middle Atlantic products or custom rack mount hardware as required if "off-the-shelf" kits are unavailable.
- E. Note that some equipment may be mounted inside the equipment racks or rack mounted on the rear calls as noted on drawings.
- F. Accessory security covers, for certain signal processing equipment, which is available from the equipment manufacturer, shall be provided as specified herein.
- G. Equipment listed as Custom by the AV Contractor shall be custom fabricated and/or assembled by the Contractor as detailed herein.

2.2 MISCELLANEOUS EQUIPMENT

- Where miscellaneous equipment is listed below or in the drawings by manufacturer or model number, it is for the purpose of establishing standards for quality, performance, construction, and function. Equipment supplied from approved manufacturers listed shall be to the same standards. Where a single manufacturer/model is listed only that manufacturer/model is acceptable.
 - Provide quantities as indicated in the drawings and/or as required for a complete installation.
 - Consistency of products and manufacturer shall be maintained for the same or similar items and functions throughout the installation.
- Audiovisual Wire and Cable
- Audiovisual cabling shall be industry standard: Belden, Creston, Liberty, and West Penn.
 - Unless noted otherwise elsewhere in the design drawings, the following cable types shall be used. Note that all part numbers are for plenum-rated cables:
 - AUDIENCE: 2122 STRANDED, SHIELDED (BELDEN 827N1)
 - SPERKIN / DC PWR: 2116 STRANDED (BELDEN 6200UE)
 - CAT5 (BELDEN 3413)
 - CAT5A (BELDEN 10G51)
 - CAT5A, SHIELDED (BELDEN 10G53F)
 - FIBER: 50 MICRON OM3 (BELDEN FC OM3)
 - For DC control circuits, wiring shall be #22 AWG stranded, multi-conductor as required, with overall shield if appropriate. Size for no more than 1% voltage drop.
 - Note that conduit sizes are based on conduit fill code requirements for specific quantities of Liberty wire within each conduit. If another approved cable manufacturer is substituted, ensure that conduit code requirements are met.
- Cable mounted and panel mounted connectors (formal and male):

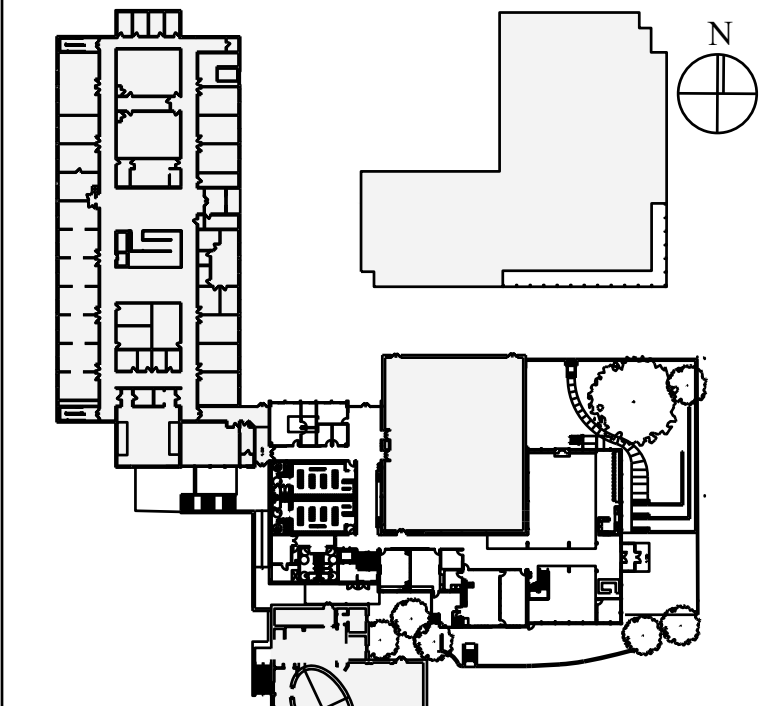

KEY PLAN N.T.S.

02/16/2026 ISSUE FOR CONSTRUCTION - BULLETIN 01

01/19/2026 ISSUE FOR CONSTRUCTION - REVISED SCOPE

01/19/2026 ISSUE FOR CONSTRUCTION

ARCHITECT PETER GISOLOTTI ASSOCIATES, LLP 566 WARBURTON AVENUE HAUSTON-ON-HUDSON, NY 10706 T: (914) 472-3677	STRUCTURAL ENGINEER DIRELLI CONSULTING ENGINEERS 143 MAIN STREET NY ACK, NY 10960 T: (845) 727-7793
MEP ENGINEERS WATKINS ASSOCIATES 48 PURCHASE STREET EVE, NY 10880 T: (914) 962-8509	ROOFING CONSULTANT VALHALLA ASSOCIATES 20 MADISON AVENUE VALHALLA, NY 10995 T: (914) 348-4550
CODE CONSULTANT MIDMORE CONSULTING 30 SUMMIT STREET, STE 501 STAMFORD, CT 06061 T: (203) 564-9991	SPECIFICATIONS CONSTRUCTION SPECIFICATIONS PERRY & CO MORGANVILLE, NJ 07871 T: (212) 979-0700
AV-IT-SEC CONSULTANT WEB UNITED TECHNOLOGIES CORP. 116 WEST STREET NEW YORK, NY 10001 T: (212) 686-8055	CIVIL ENGINEER (BY OWNER) REDNESS AND MILD 22 FIRST STREET STAMFORD, CT 06065 T: (203) 372-6500
GEOTECHNICAL ENGINEER (BY OWNER) CONSISTANT, INC. 555 LONG HAVEN DRIVE NEW HAVEN, CT 06515 T: (203) 562-7771	

